Conceptual Design of Commercial Cislunar Space Station for Large Scale Space Development

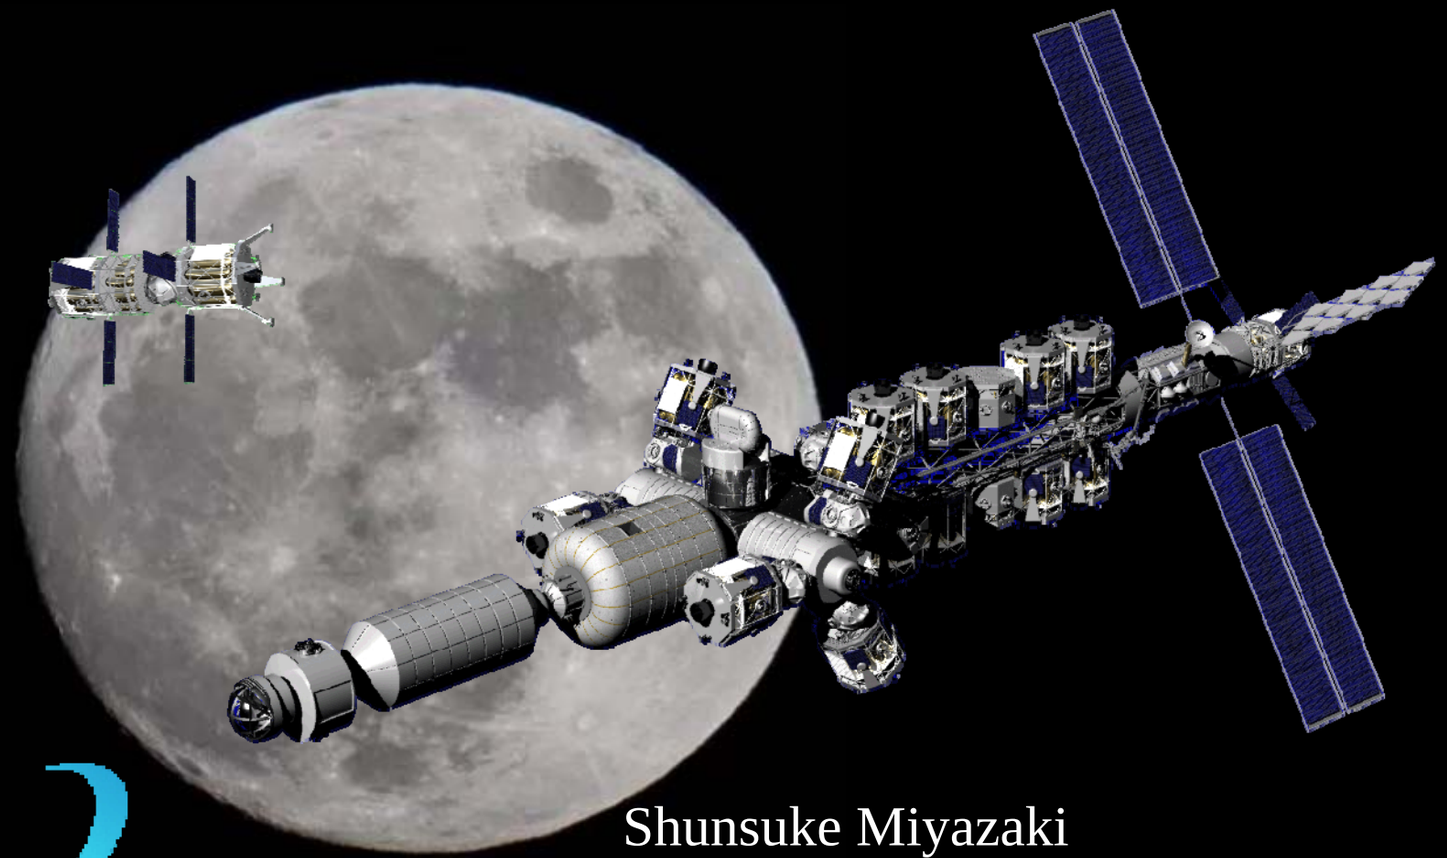



Shunsuke Miyazaki

Supervisors:

Dr. Olga Bannova

Prof. Larry Bell

Sasakawa International Center for Space Architecture

Cullen College of Engineering

University of Houston

Table of Content

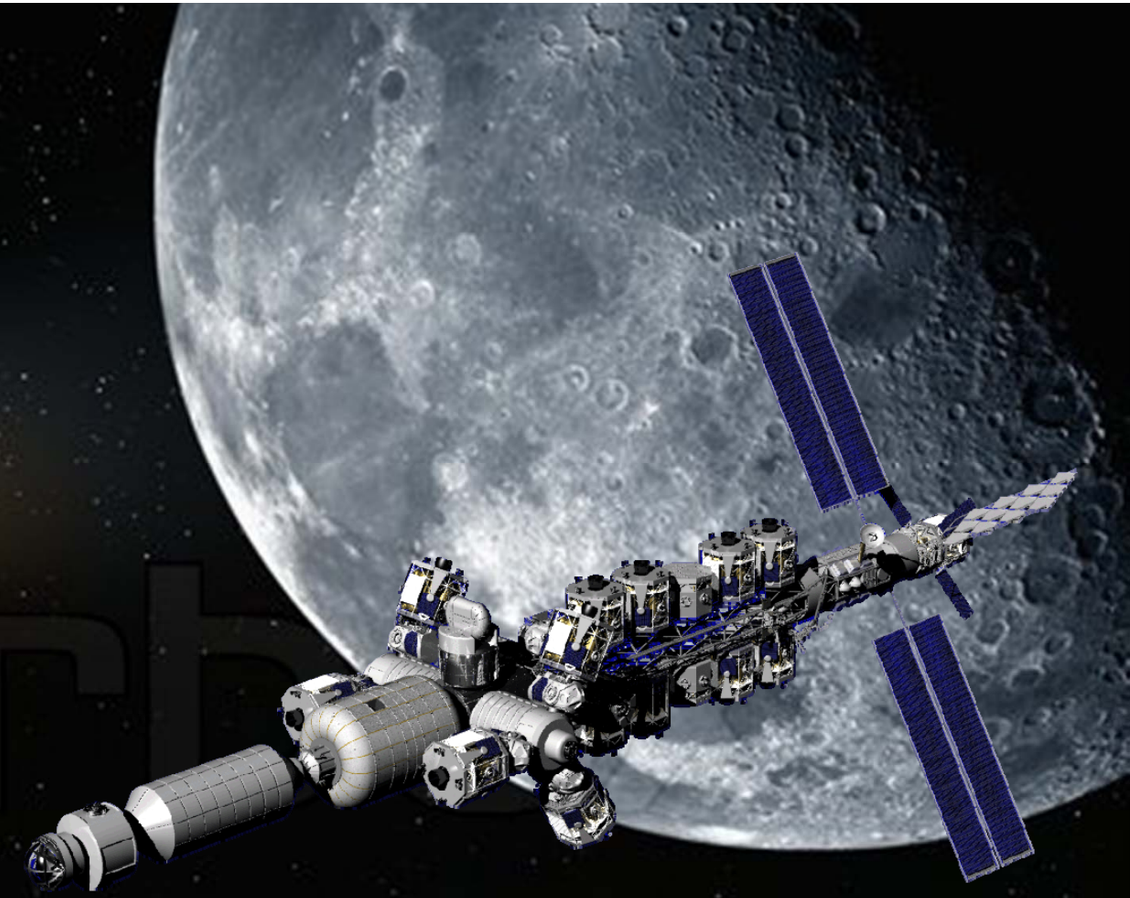

Introduction: Mission Statement and Goal

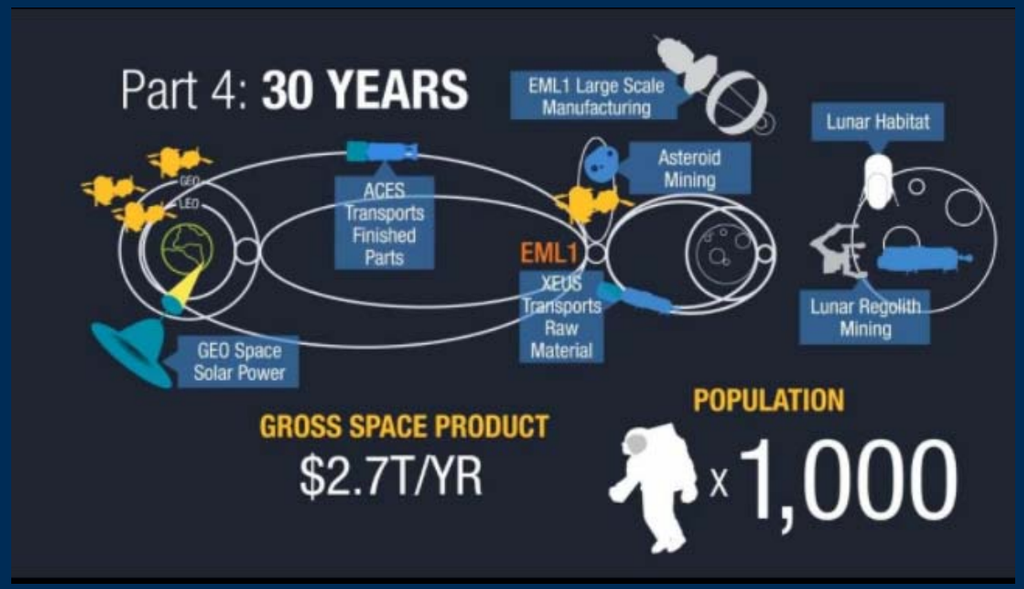

- Mission Statement:
  Design, Build, and Deploy Commercial Lunar Orbit Station by 2040

- Mission Objective: Support ULA's Cis-Lunar-1000 after 2045

1. To study and develop Future technology
2. To develop testbed to study future long-human space flight
3. To develop waystation to enable to access to various destination
4. To encourage commercialization of Cis-lunar space

Introduction: Mission Assumption

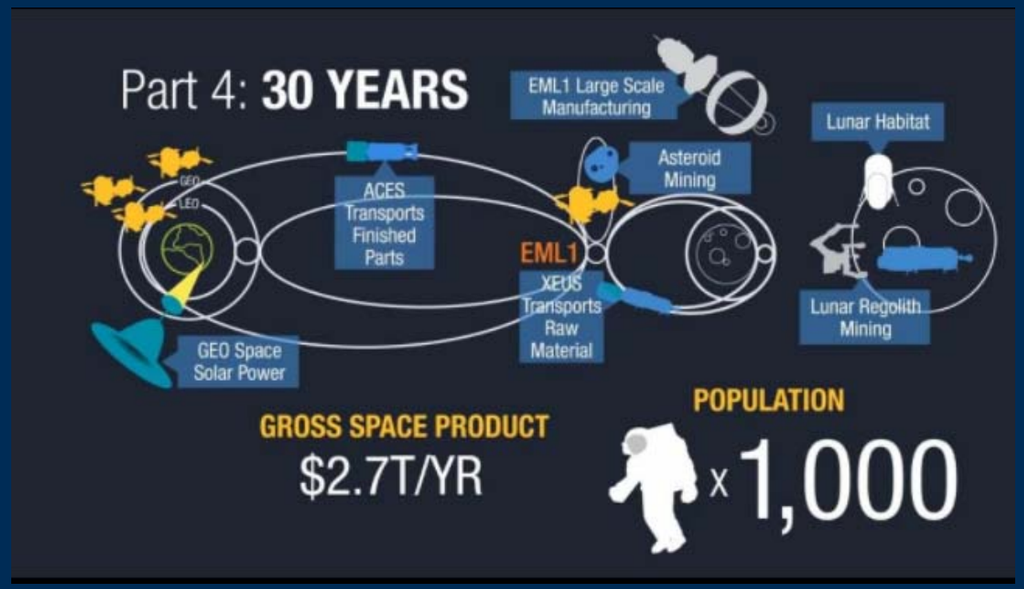

- Assumption
  - LOP-Gateway will start building and operating from 2025
  - Initial unmanned and manned lunar and mars exploration has started

- Environment Assumption
  - ISRU on the Moon

    >400mT/year by 2037

  - Population on the Moon at 2045 through a year

    ×170 42 tourists (1month stay)
    128 crew (3~6 month)

    Need 50 people Transition every month

Design Requirements

- AXIS Design Requirement

=15yrs

12 crew members (nominal), for 180 days without Resupply

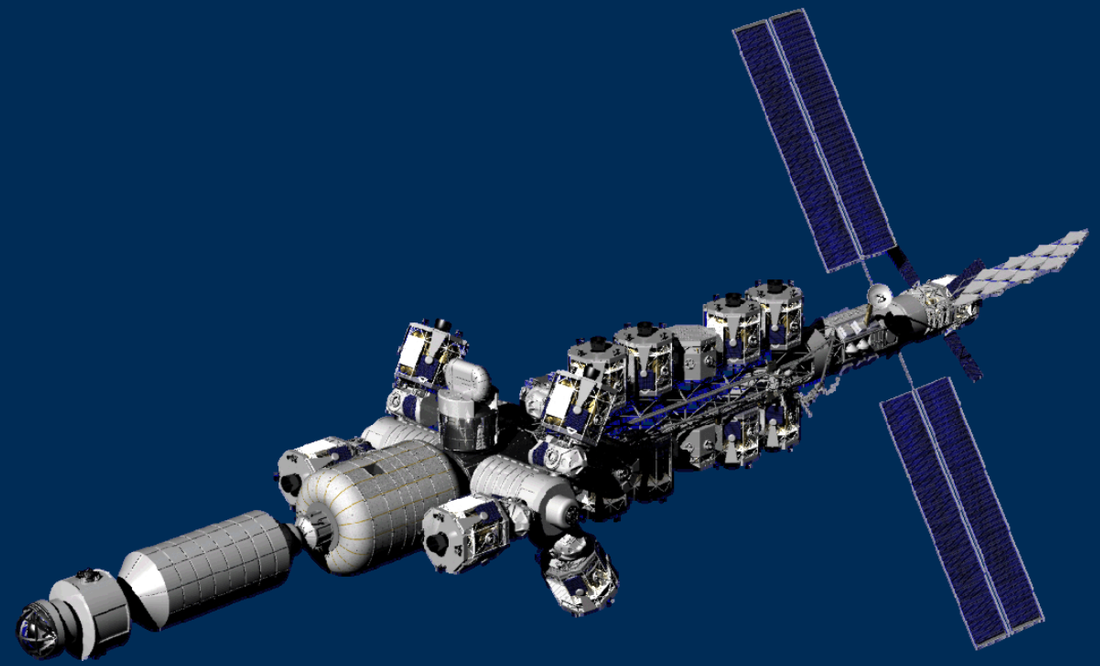

- Closed-Loop ECLSS (95% Water Recovery, >85% CO2 recovery)
- Depends on both Earth and Lunar resupply
- Friendly User Interface
- Well designed for

- Protect Crew from SPE, GCR

- Allow to berth/ docking following vehicles concurrently;
  - 2 × Cycler
  - 4 × Lunar Lander
  - 2 × Cargo
- Allow to berth following vehicles on the truss;
  - 10 × Modular Lander
  - 2 × Crew Vehicle
  - 1 × Cargo

Introduction: High-Level Requirements

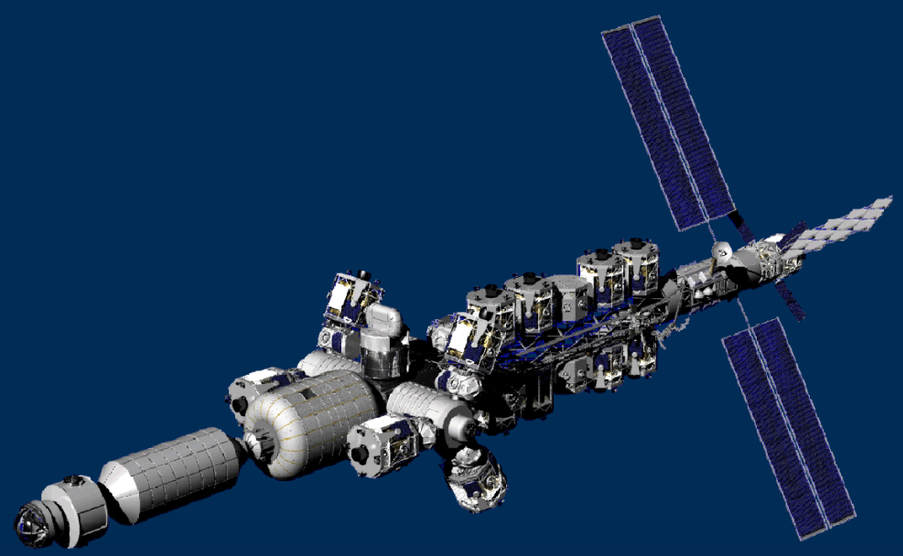

- Science and Technology Requirements

Science & Technology

Remote Operations Support

Human Factor and Health

Small Satellite Service & Communication

Orbit Manufacturing

Safe Heaven & Rescue Operation

On Orbit Assembly & Maintenance

Design Overview: Orbit Selection

- Near Rectilinear Halo Orbit

Orbit Characteristic	
Orbit Period	6-8 days
Lunar Amplitude Range	2000-75000km
Station Keeping	10 m/s per year
No communication Occultation	
Radiators are sufficient for Heat Rejection (62W/m^2)	

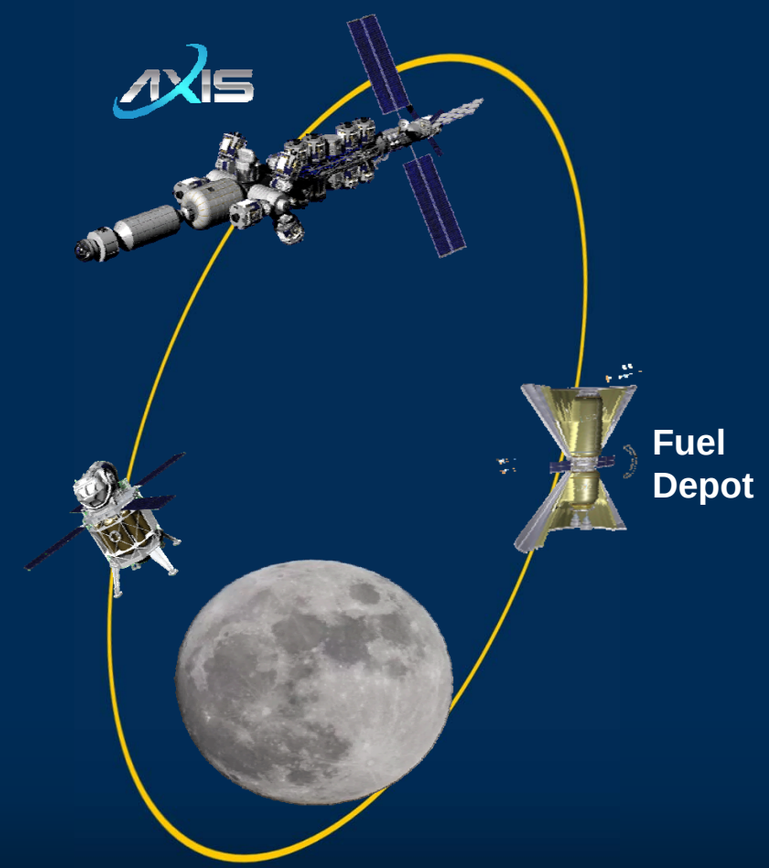

Introduction: Transportation System

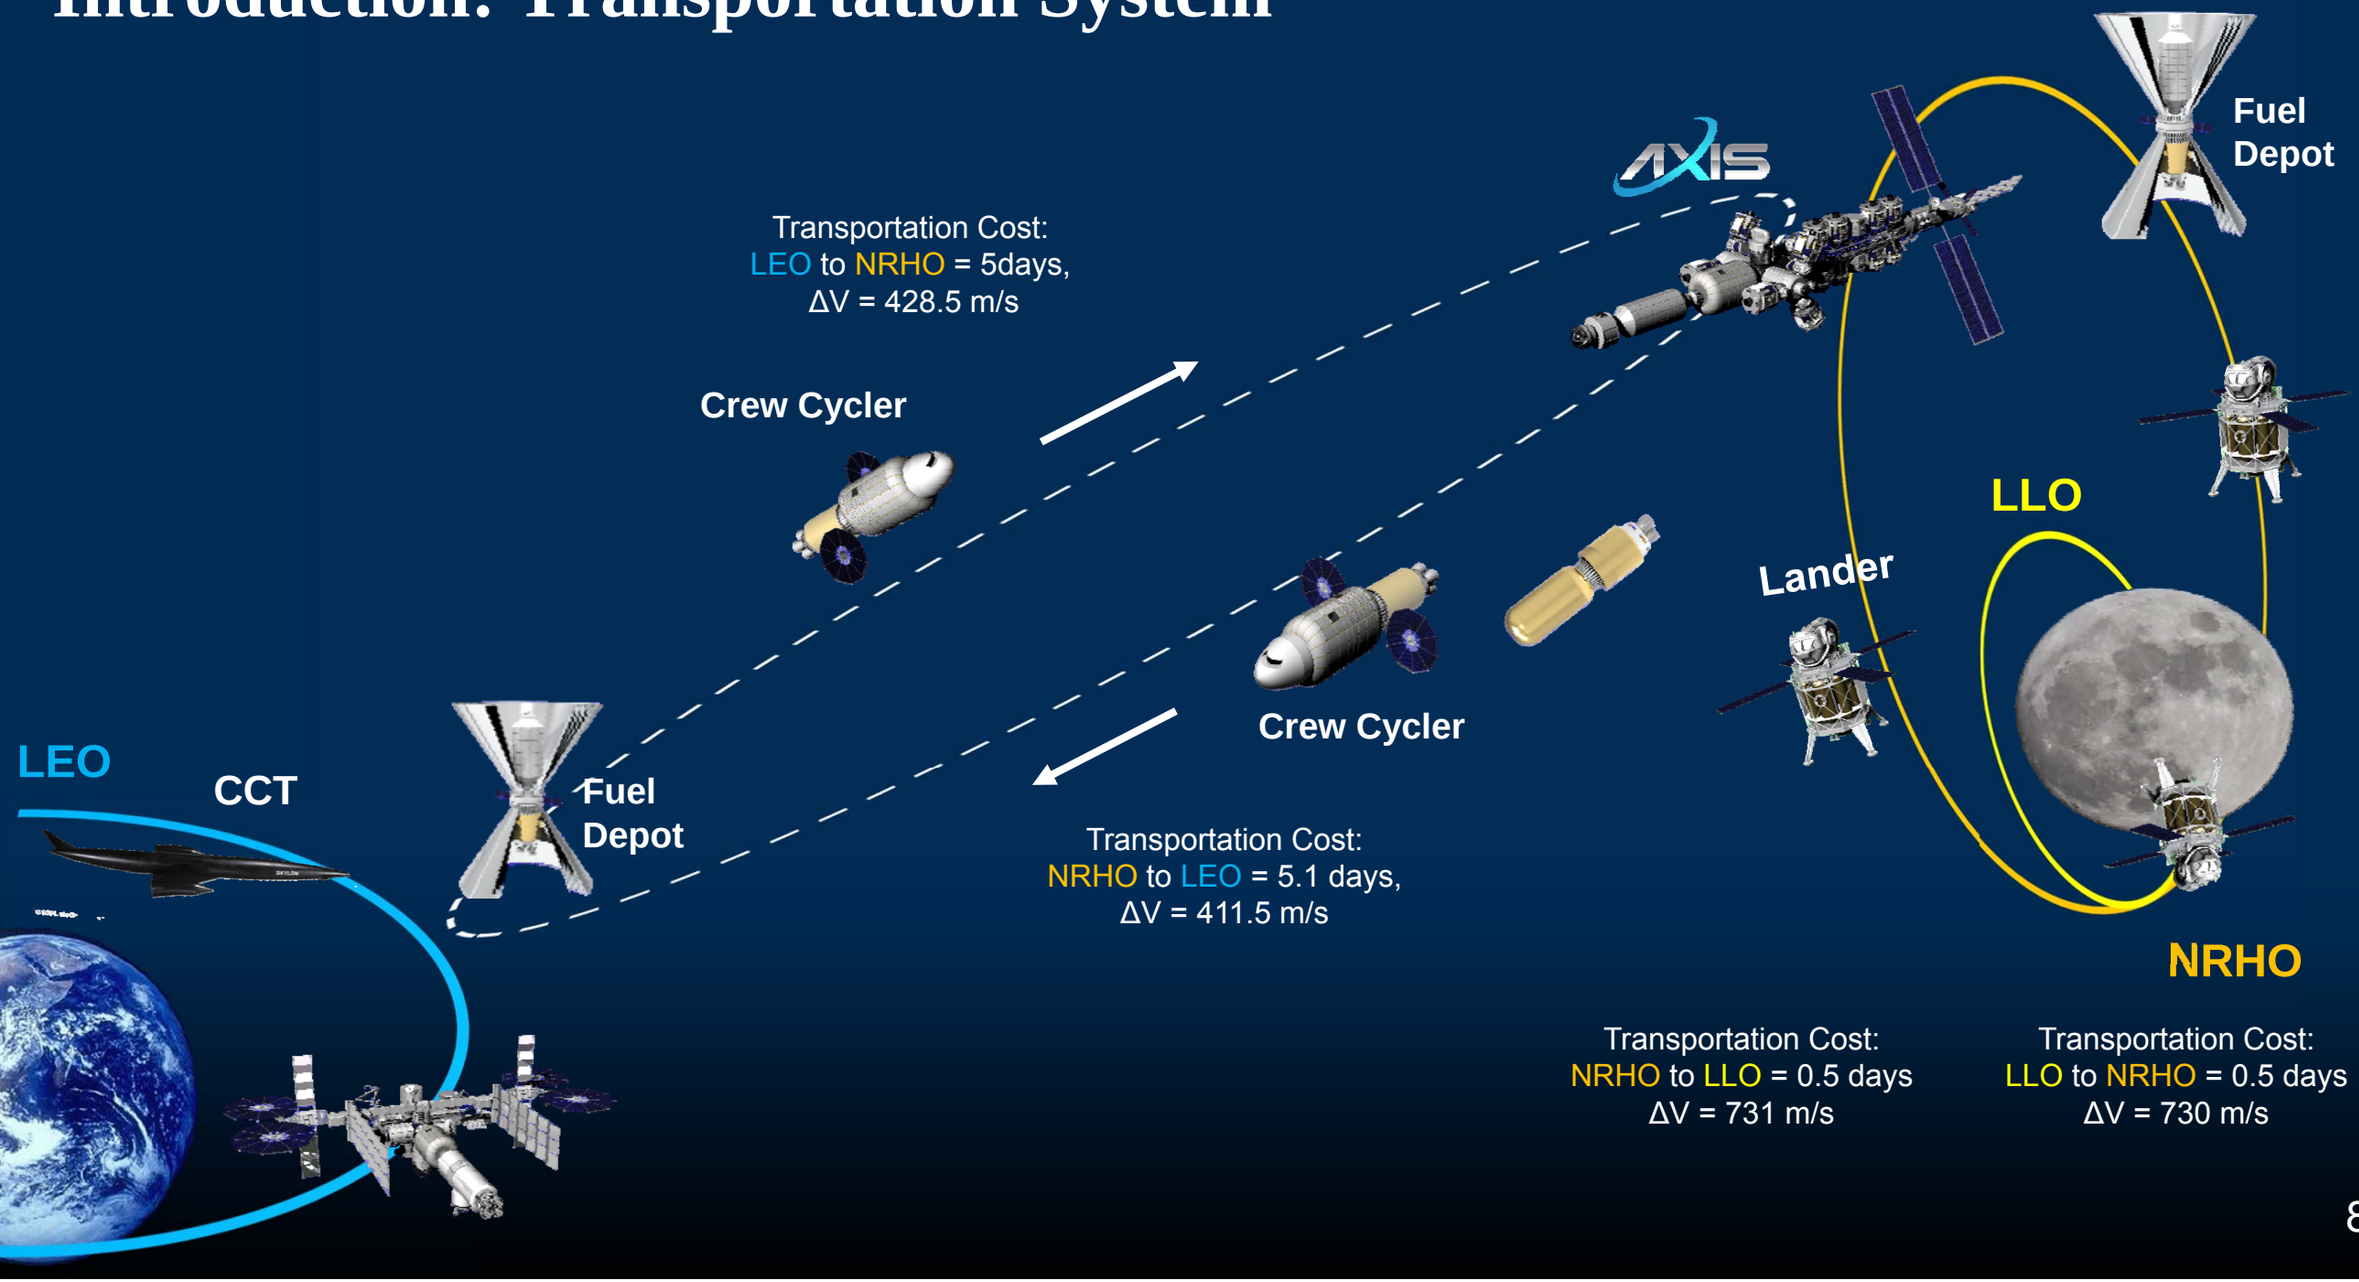

Assumption: Transportation System

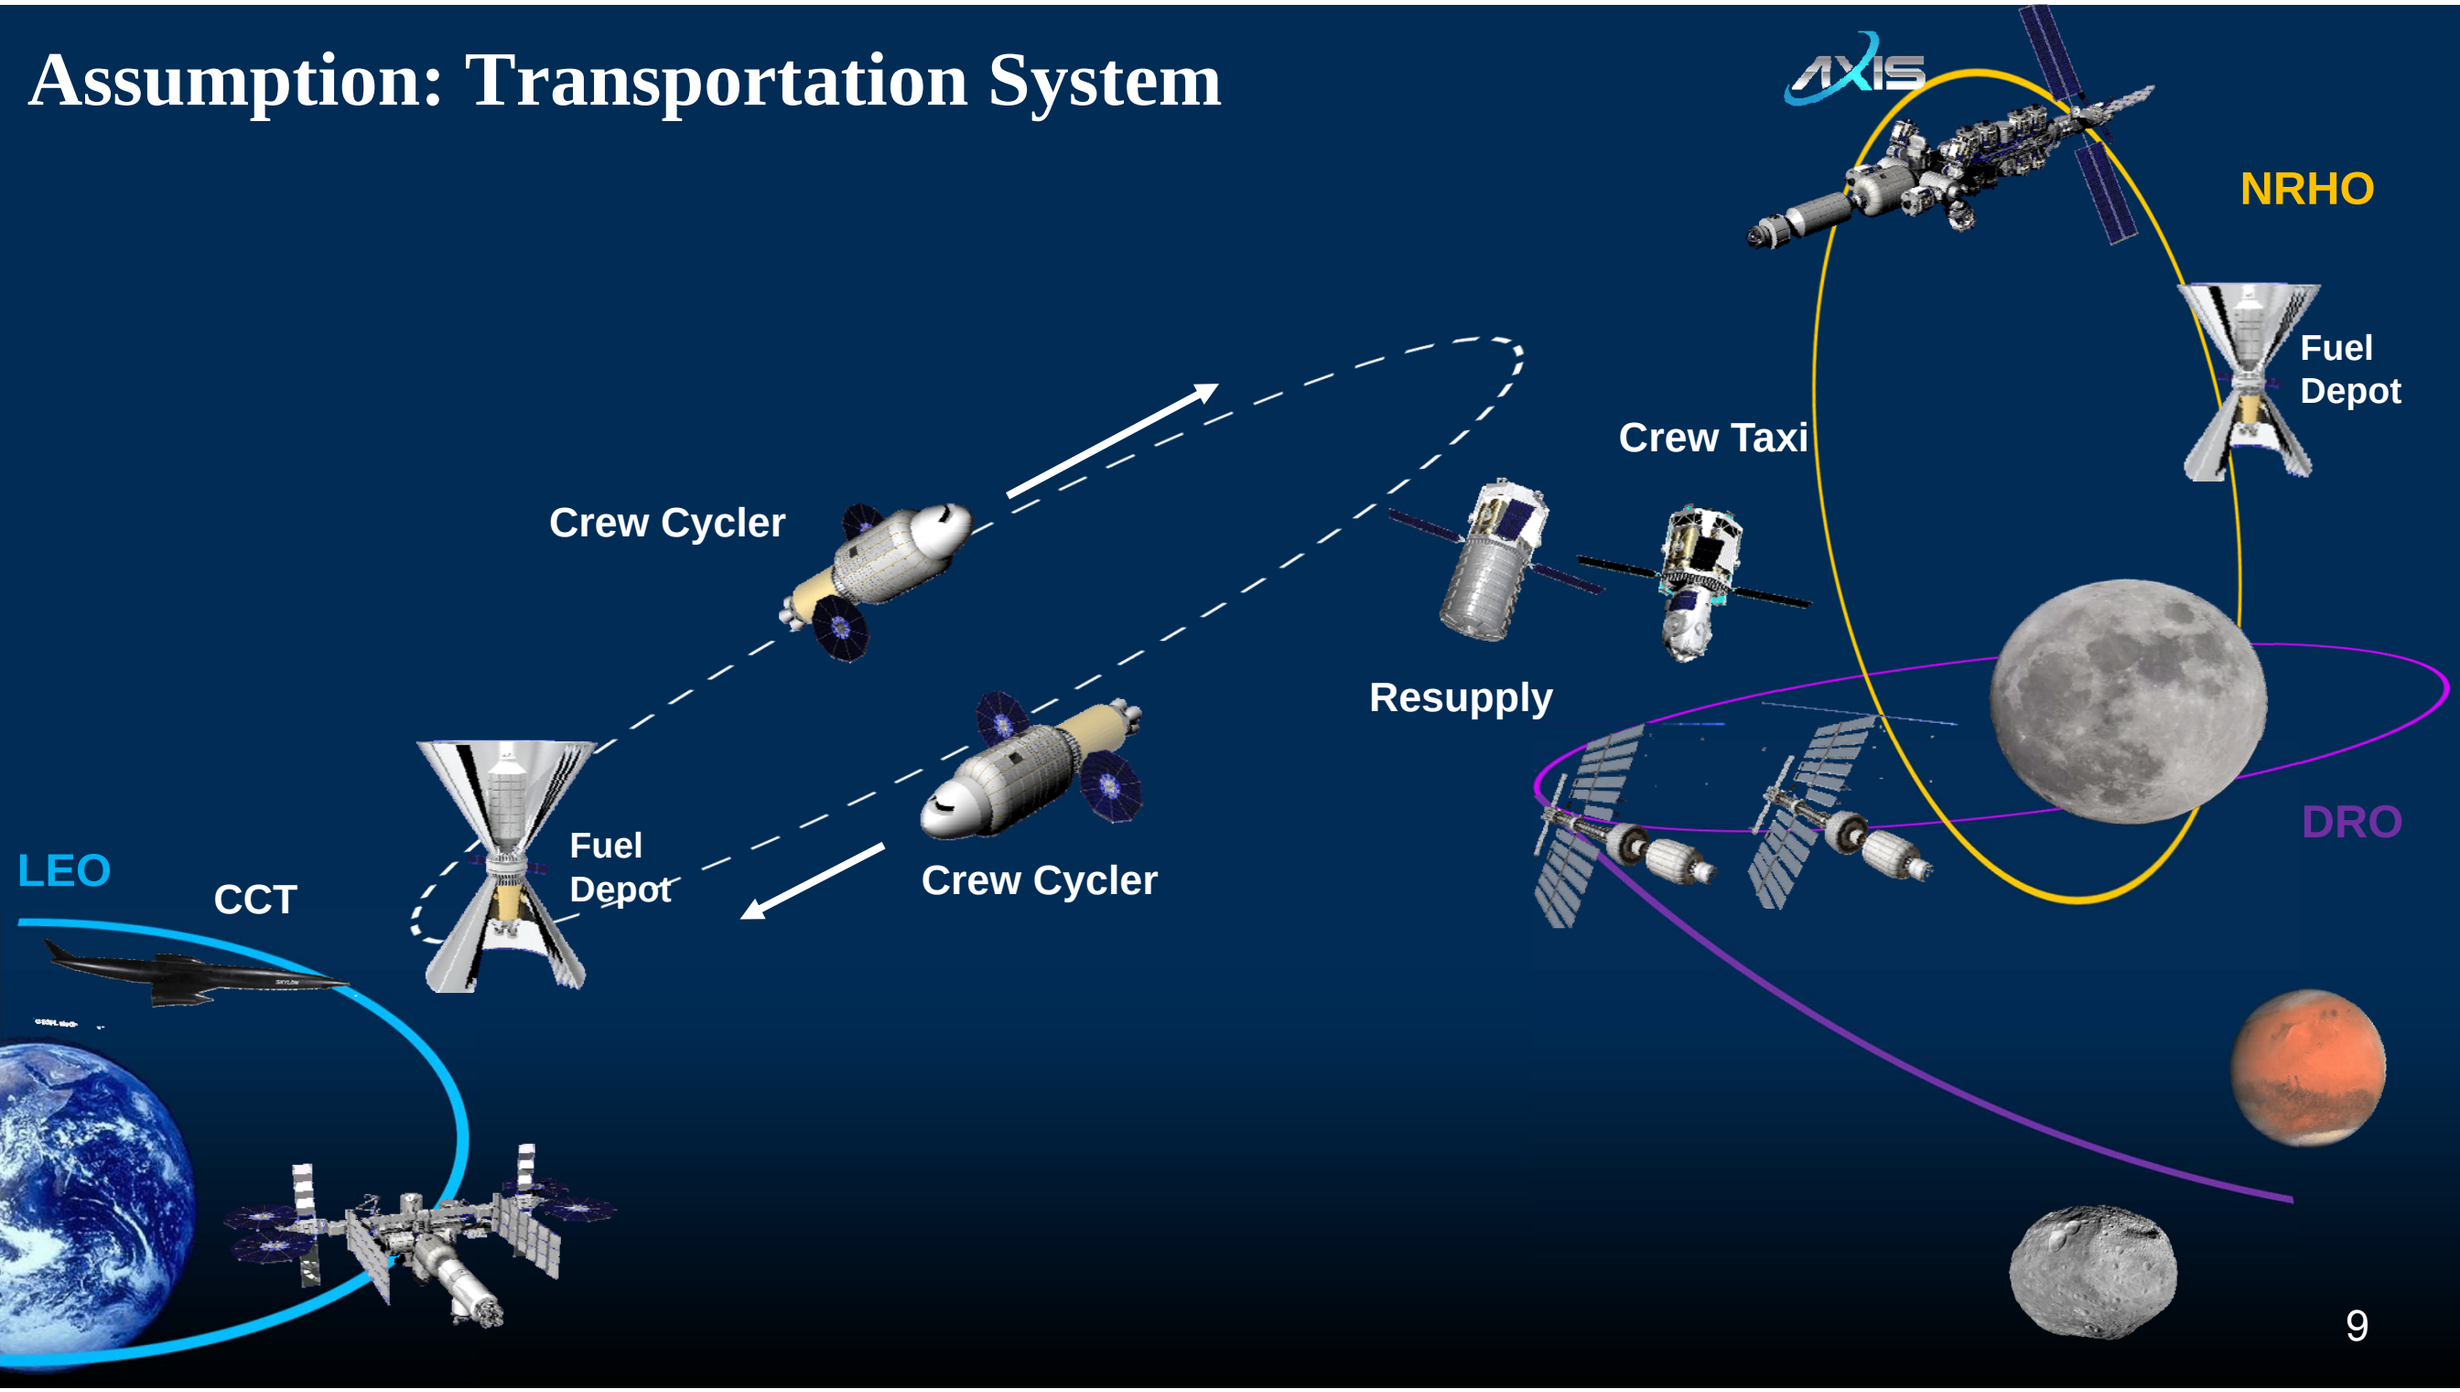

Assumption: Available Elements

- Lunar Crew Cycler

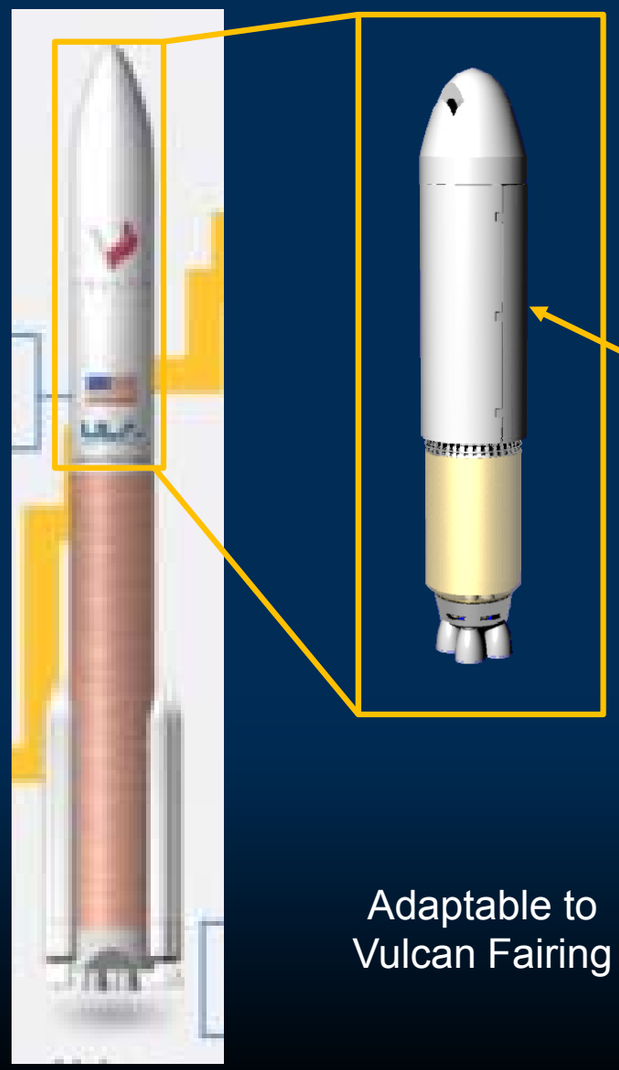

Inflatable Module in Cargo bay

Adaptable to Vulcan Fairing

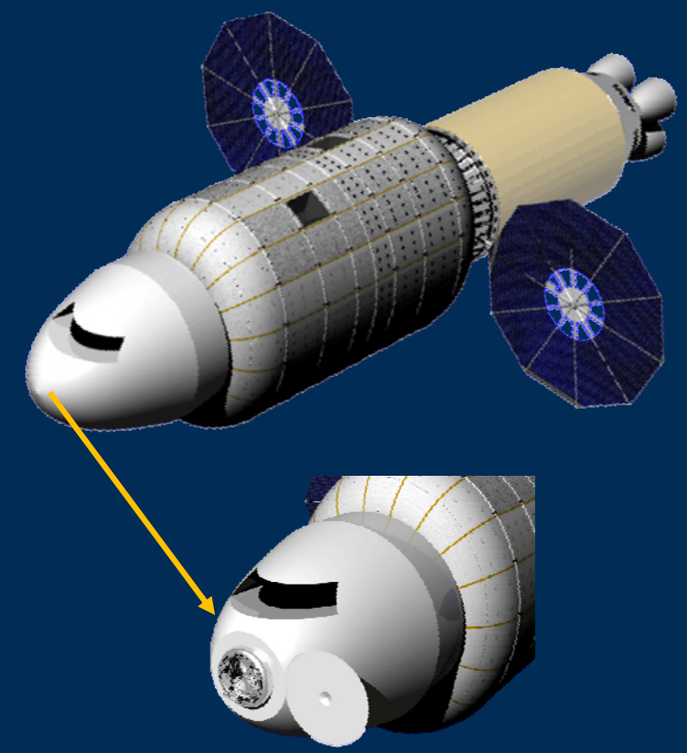

Lunar Cycler	
# of Crew	15
Support Duration (days)	30
Pressurized Volume (m^3)	400

Design Overview: Available Element

- Modular Systems

Modular System	
Mass of Structure	2783 kg
Mass of Propellant	6748 kg
Max. Mass of Cargo	8370 kg

Crew Lander	
# of Crew	8
Support Duration	7 days
Pressurized Volume	20 m^3

Modular Lander

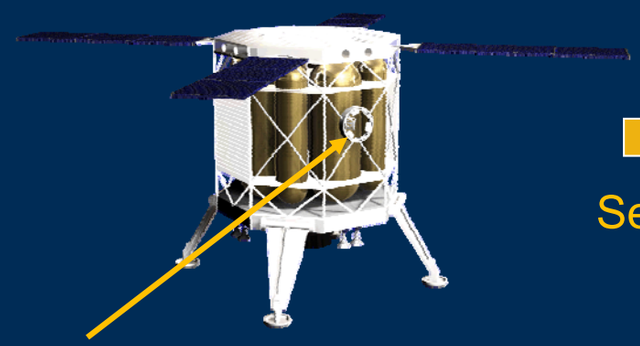

Androgynous Connection

Service Module

Crew Lander

Cargo Transporter

Crew Transfer Vehicle

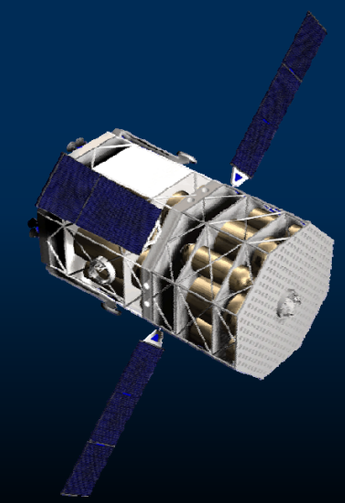

Space Tug

Mission Assumption: Available Element

- Modular Systems

Modular Lander

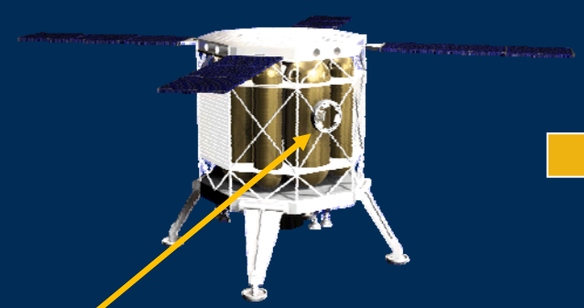

Androgynous Connection

Cargo Lander/ Launcher

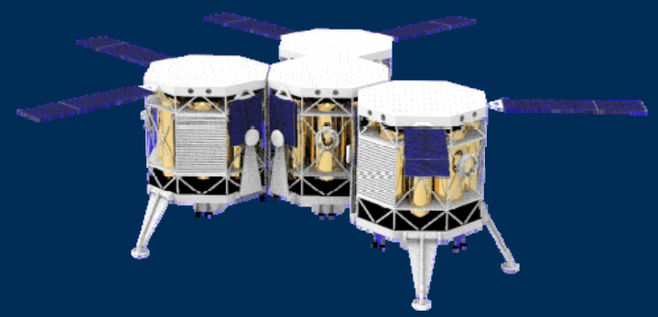

33,480kg Class Cargo

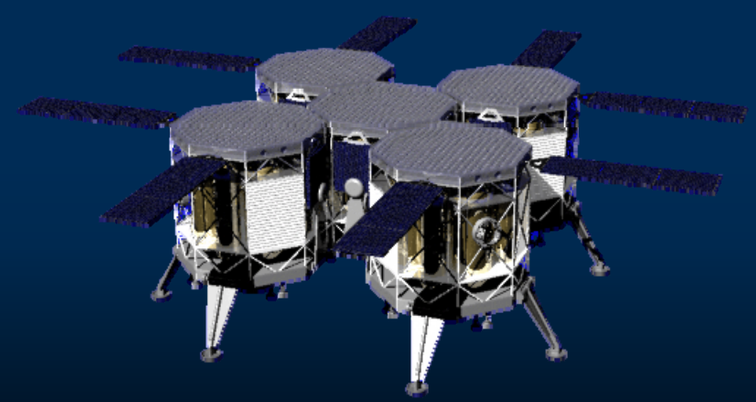

41,350kg Class Cargo

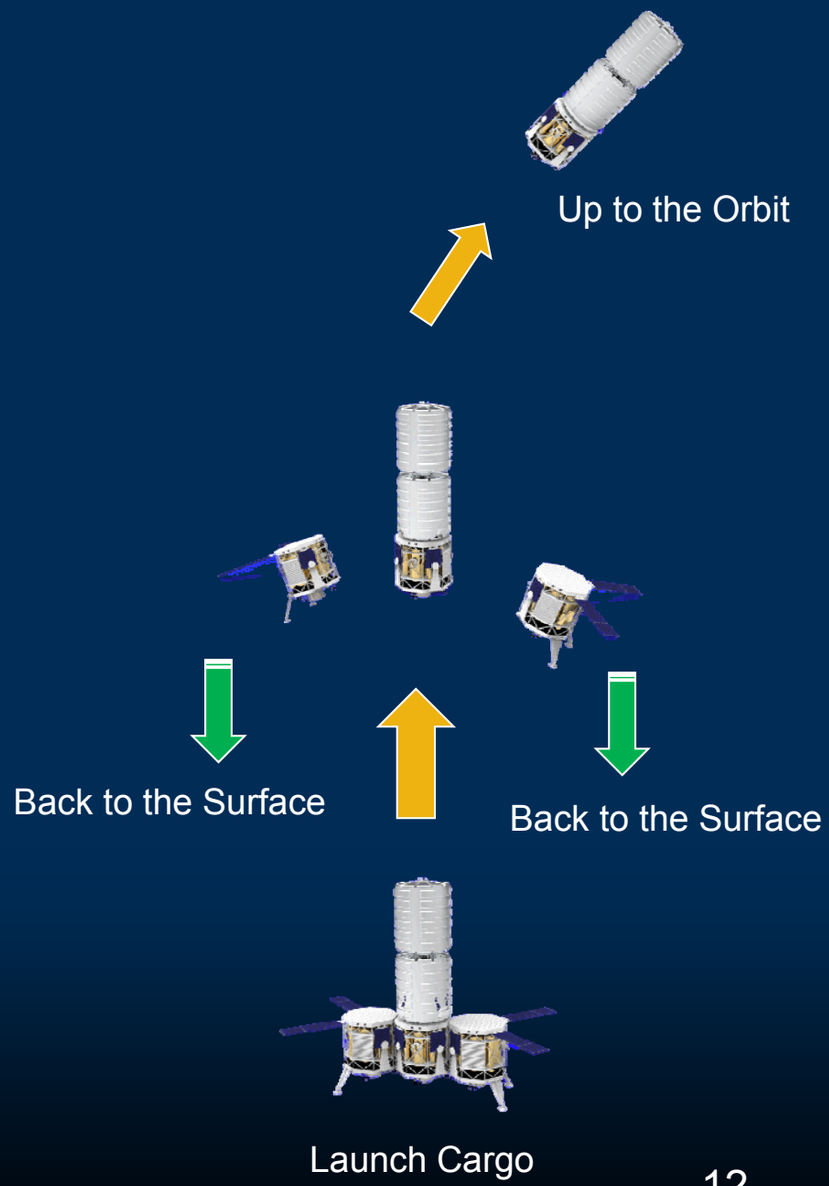

Modular System	
Mass of Structure	2783 kg
Mass of Propellant	6748 kg
Max. Mass of Cargo	8370 kg

Introduction: Mission Timeline, Phase 1 Preparation

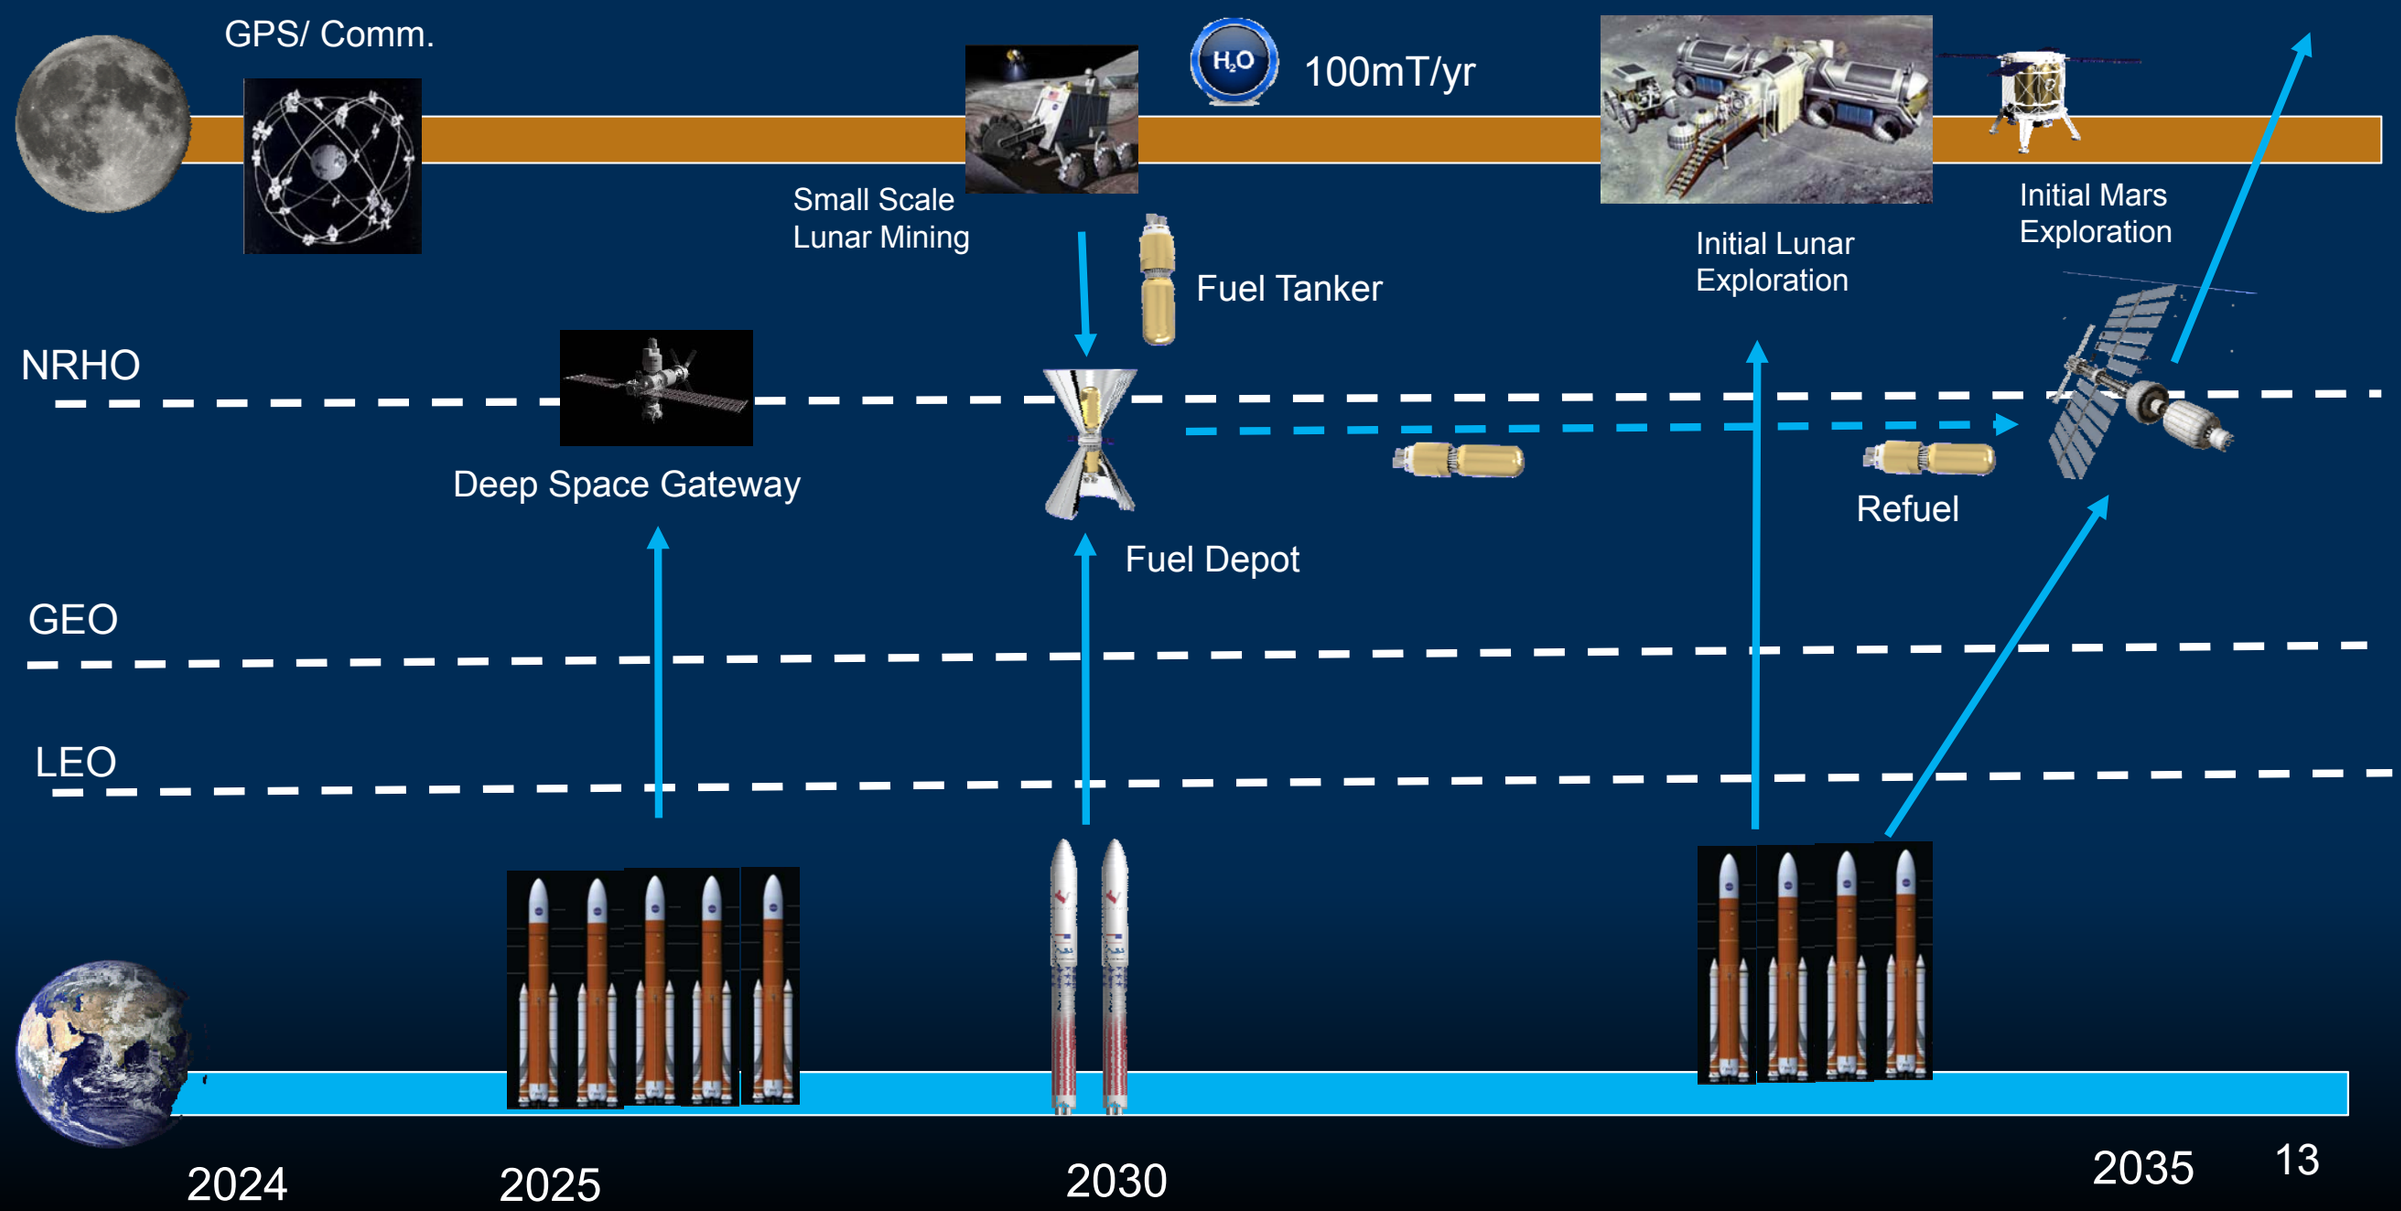

Introduction: Mission Timeline, Phase 2 Building

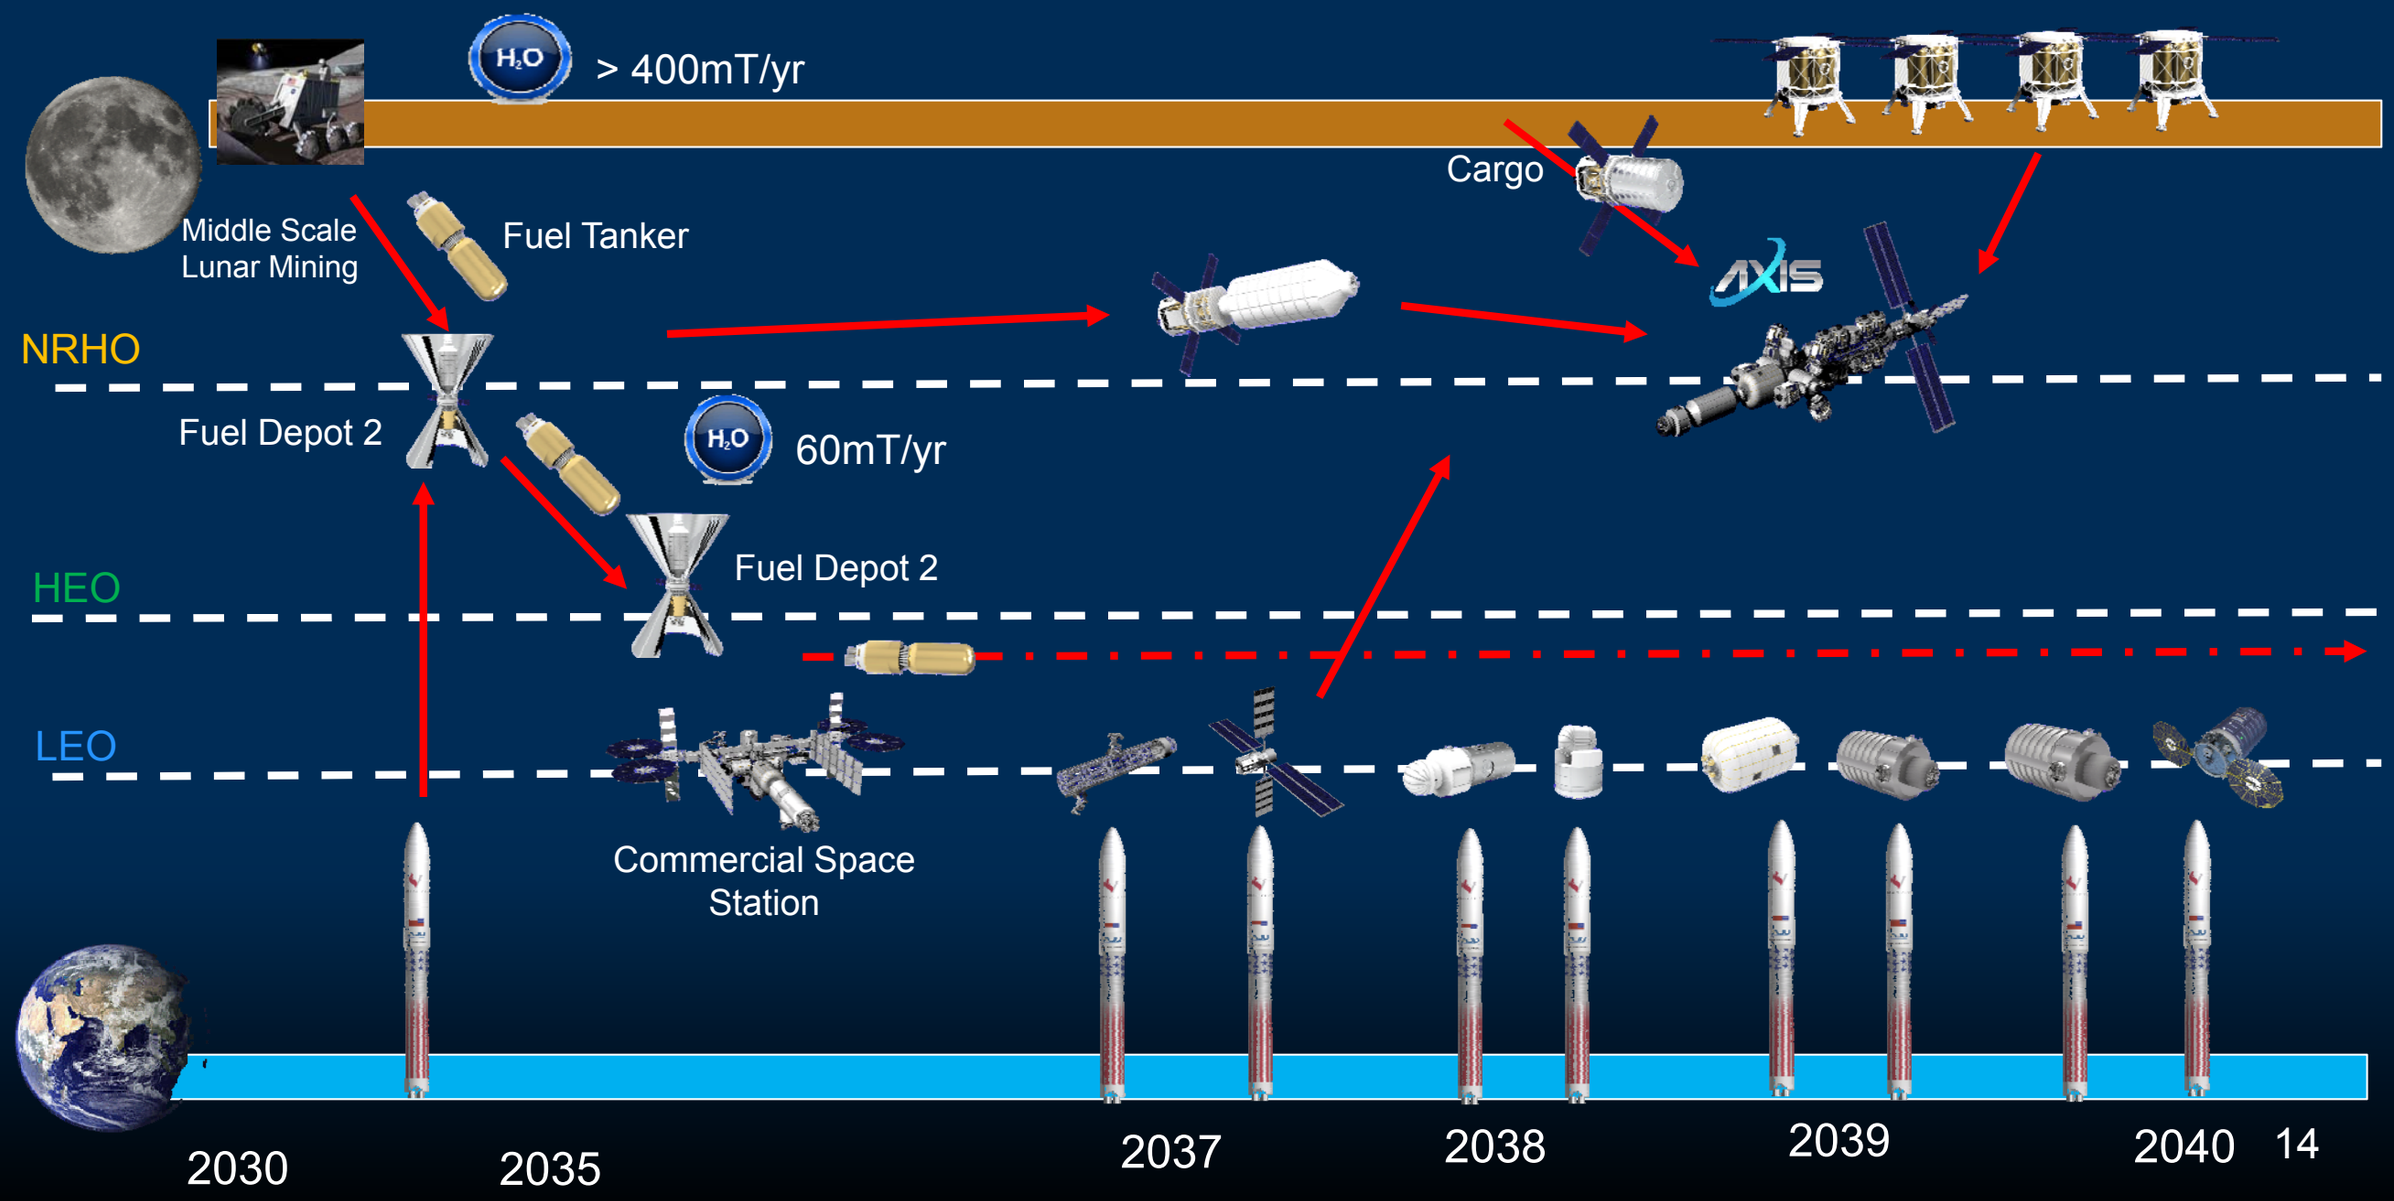

Overview Design of Axis Station

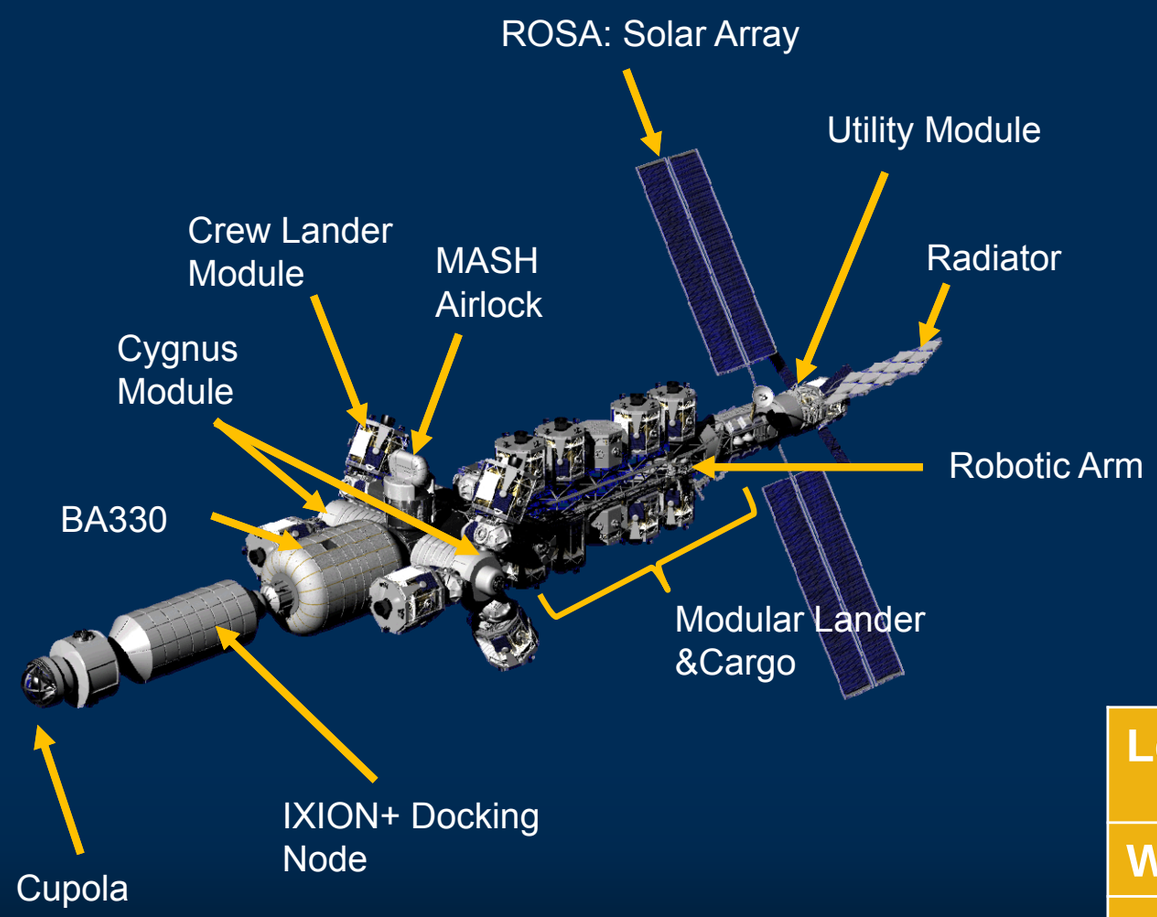

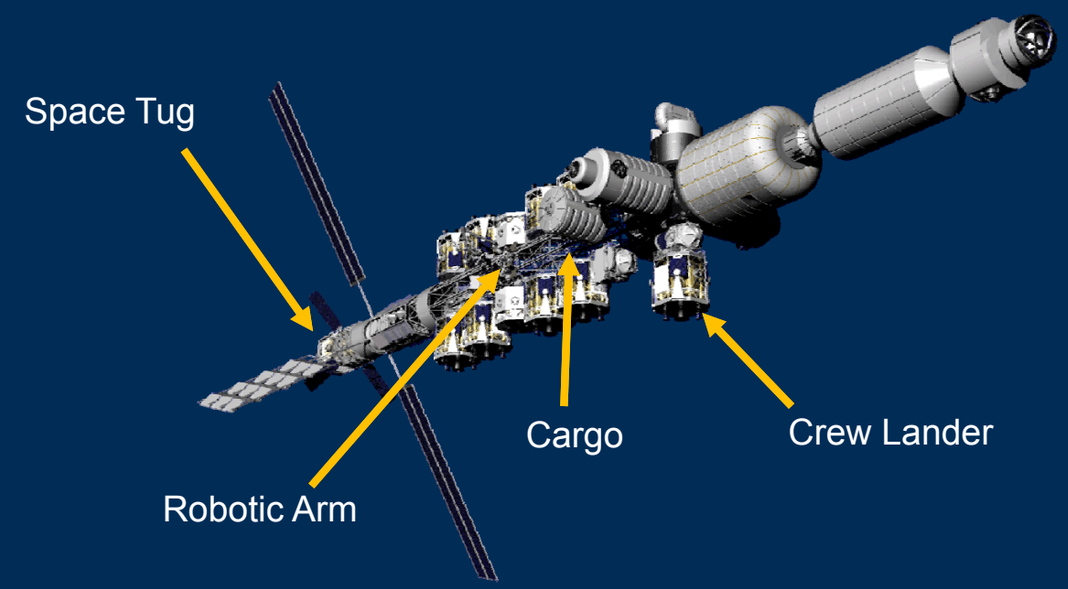

Length (+S.Tug) (m)	81m (94.8m)
Width (m)	36.4m
Height (m)	43m
Pressurized volume (m^3)	913
Pressurized Docking Port	11

Design Overview: Utility Module

❑ Utility Module

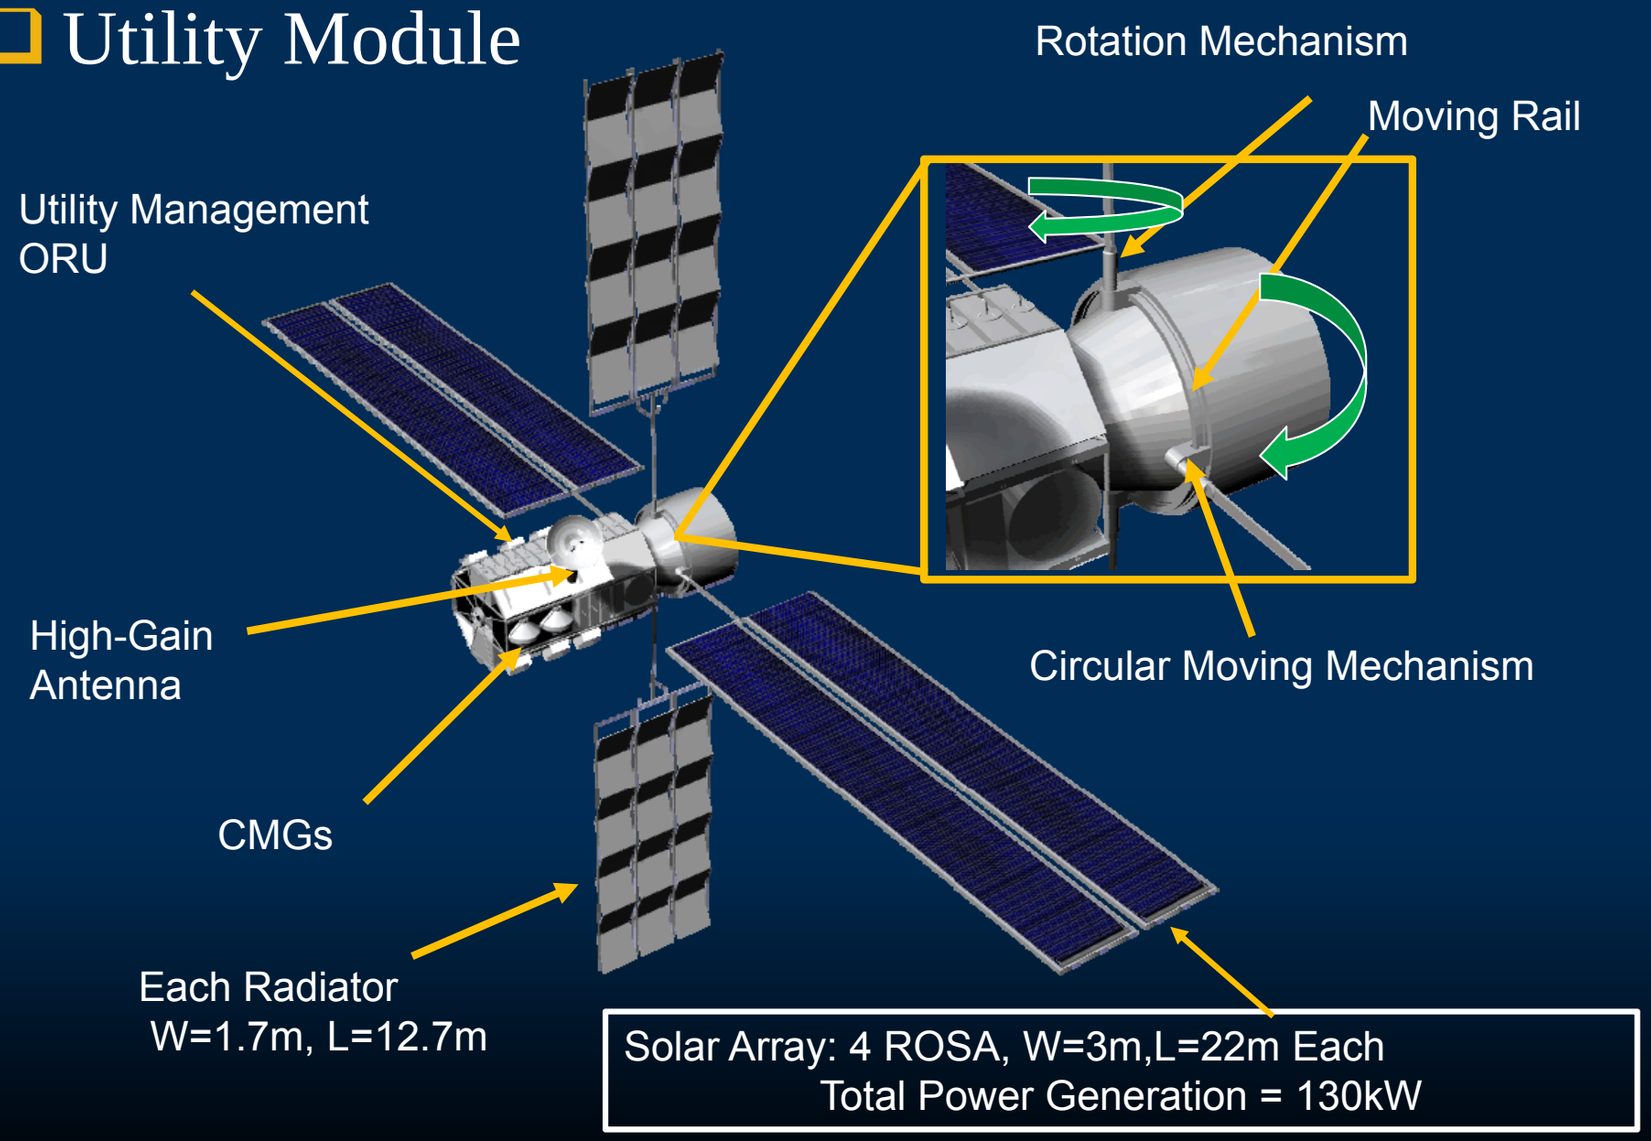

❑ Li-Ion Battery

- NRHO Total Eclipse Time = Max. 3hours
- Baseline Power = 80kW
- Total Required Capacity = 240kWh
- # of Li-Ion Battery Cell = 1367 cells
- Mass = 783kg

Design Overview: Articulated Octa. Truss Systems

Truss Configuration: Octagonal
H=4.2m, L=25m

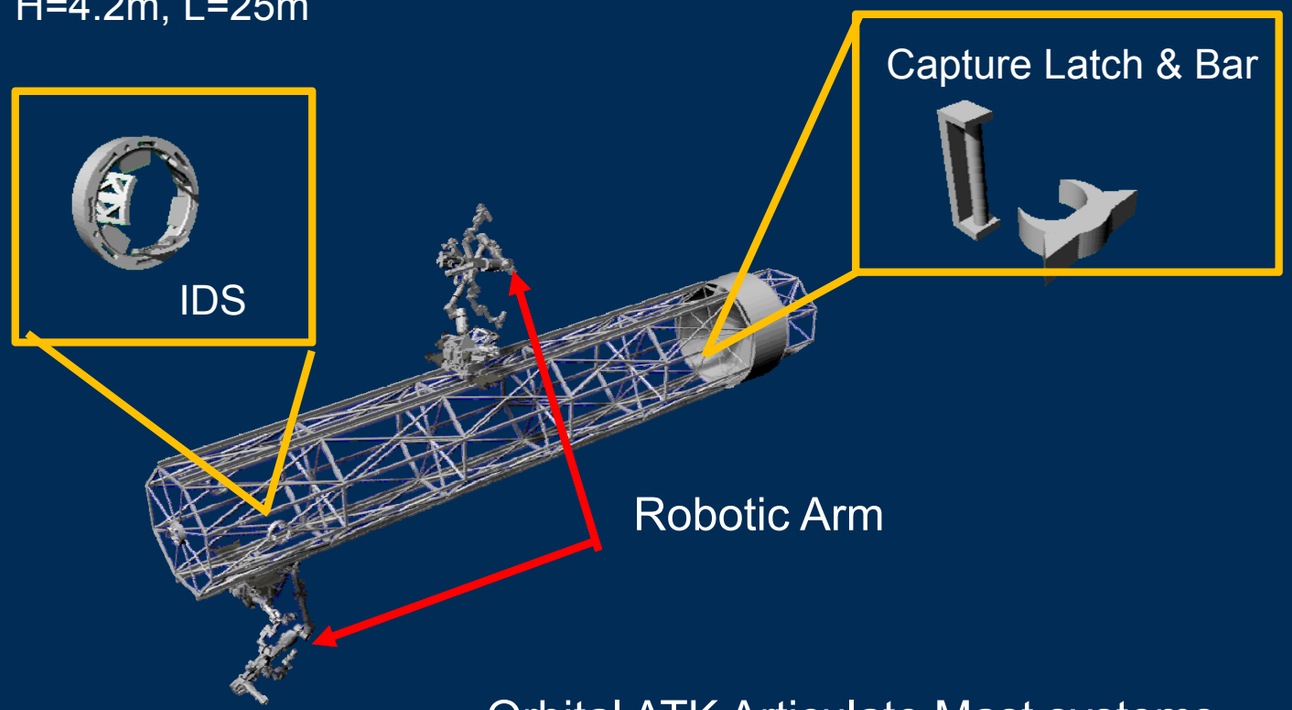

Orbital ATK Articulate Mast systems

1. Fold At Launch

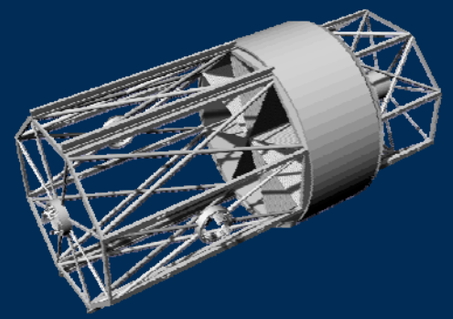

2. Deploy at LEO

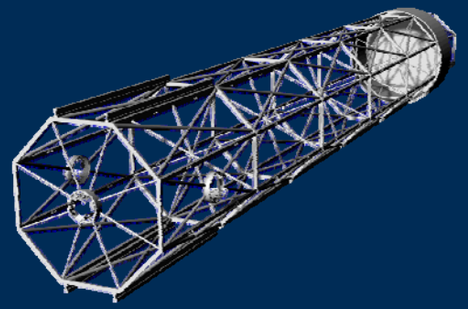

3. Deploy Rail and Install On Truss

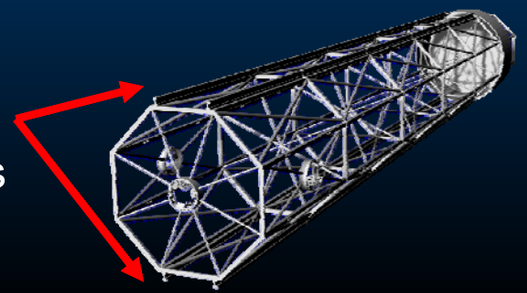

Design Overview: Design Concept of Habitation

- ISS or DSG derived Habitation Modules

BA330

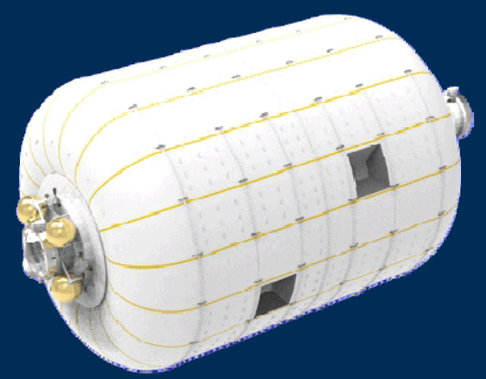

Node

Airlock: MASH (Minialistic Soft Structure Hatch)

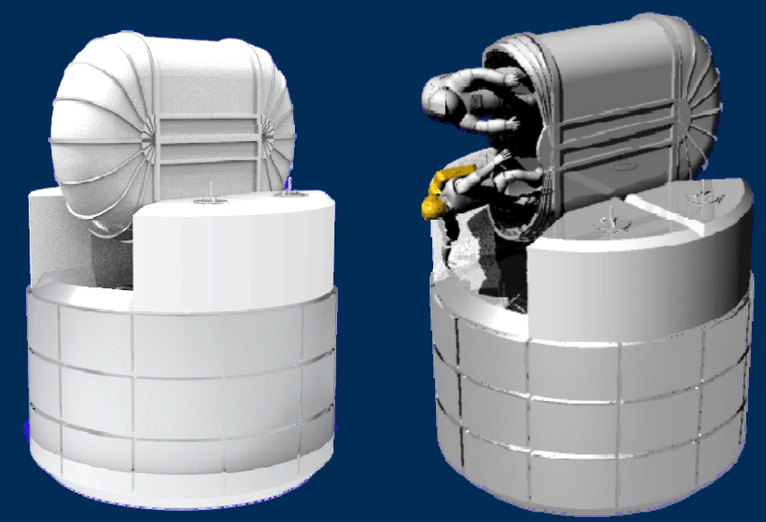

BA330	
Length (m)	13.6
Diameter (m)	6.7
Volume (m^3)	330

Node	
Length (m)	6.5
Diameter (m)	4.4
Volume (m^3)	97.2

MASH Airlock	
Length (m)	5.3 m (MASH: 2.3 m)
Diameter (m)	4.4 m
Volume (m^3)	75.76

Design Overview: Design Concept of Habitation

- ISS or DSG derived Habitation Modules

Cygnus Docking Node

Node	
Length (m)	7.7
Diameter (m)	4.4
TRL	6

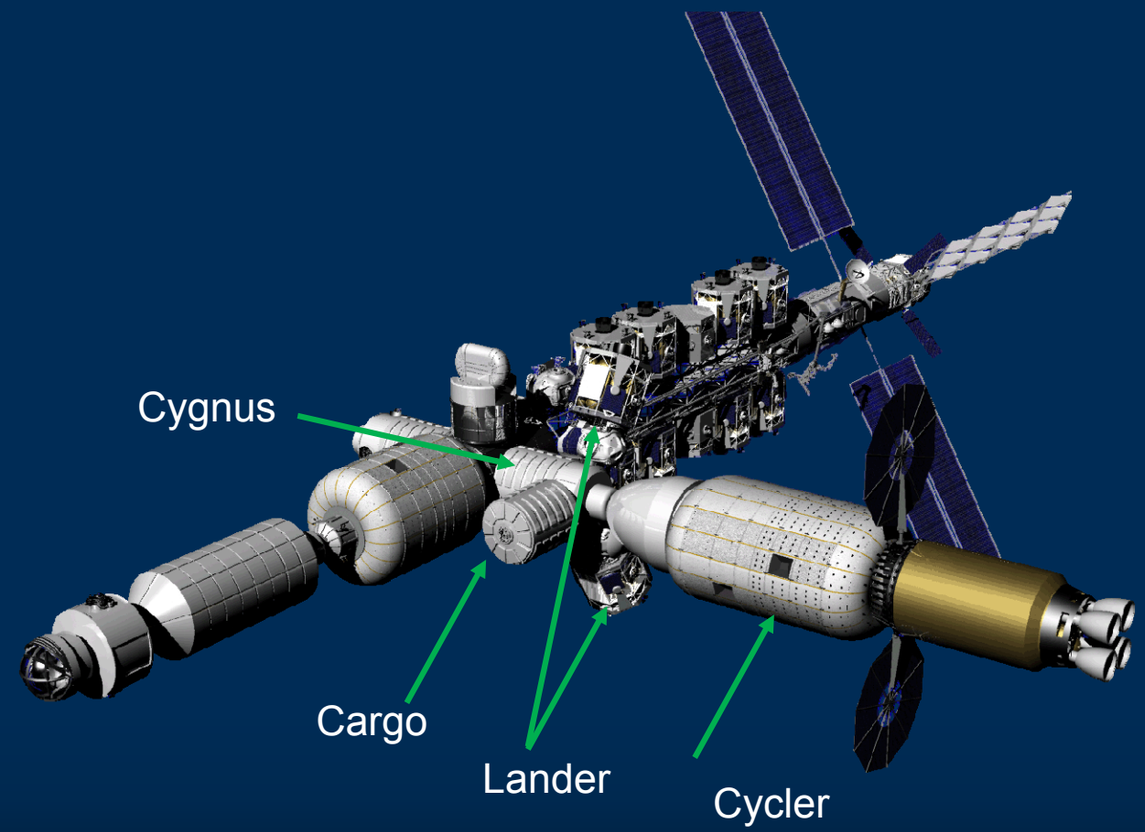

Design Overview: Design Concept of Habitation

- ISS or DSG derived Habitation Modules

Ixion LH2 fuel Tank

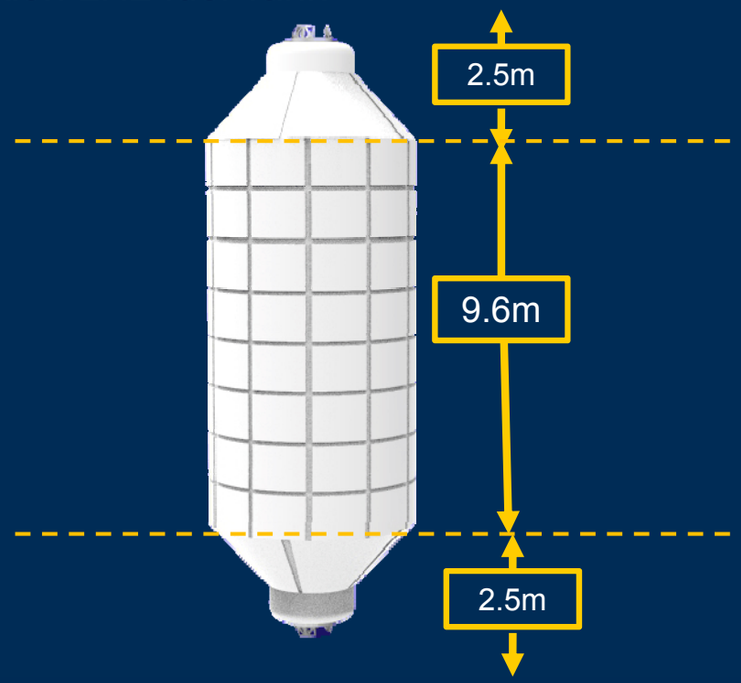

Cupola

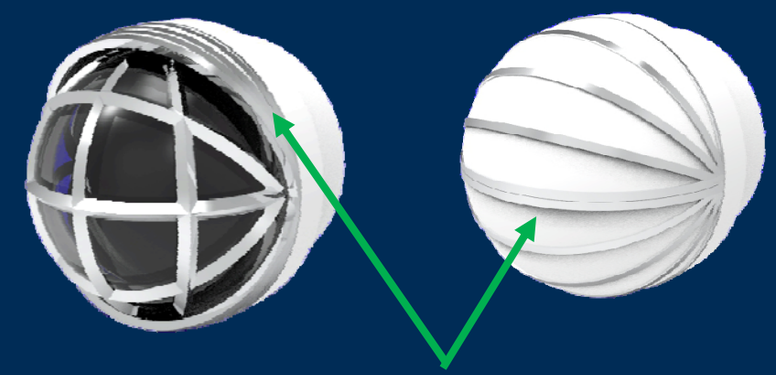

Sun-Shield

Ixion Tank	
Length (node to node)	14.7m
Diameter	4.8m
Volume	242m^3

Small Node	
Height (m)	3
Diameter (m)	4.4

Cupola	
Height (m)	3.5
Diameter (m)	2.5

Design Overview: Functional Layout

- Functional Proximity

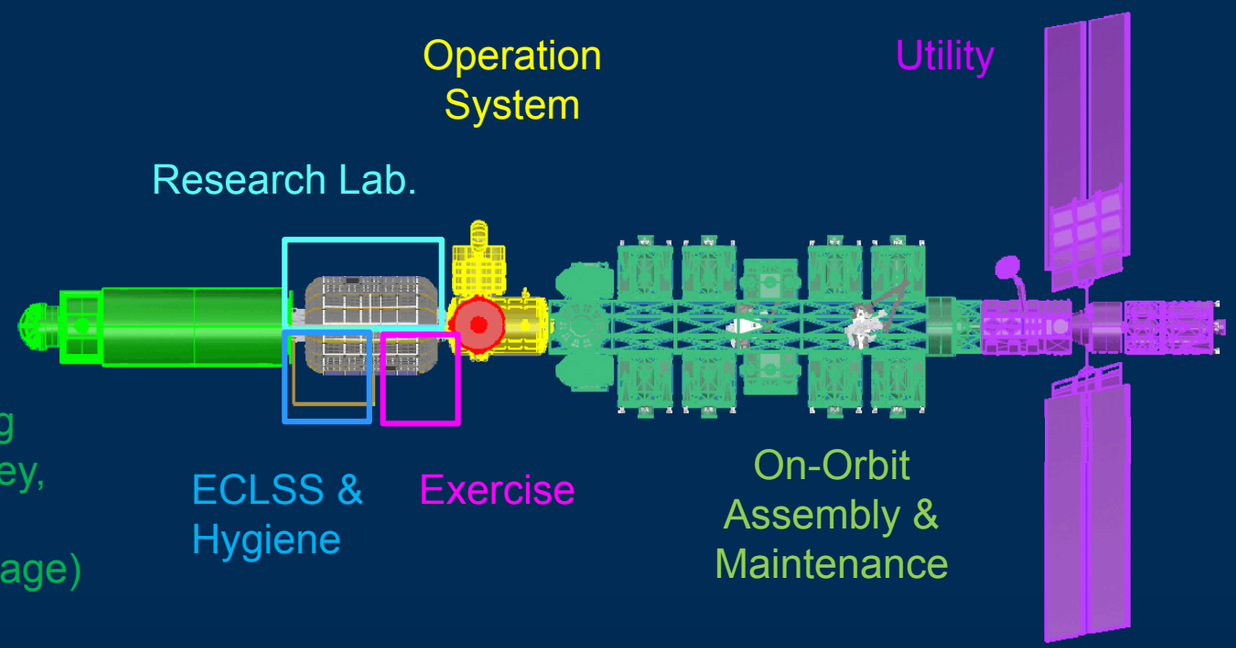

Side View

Top View

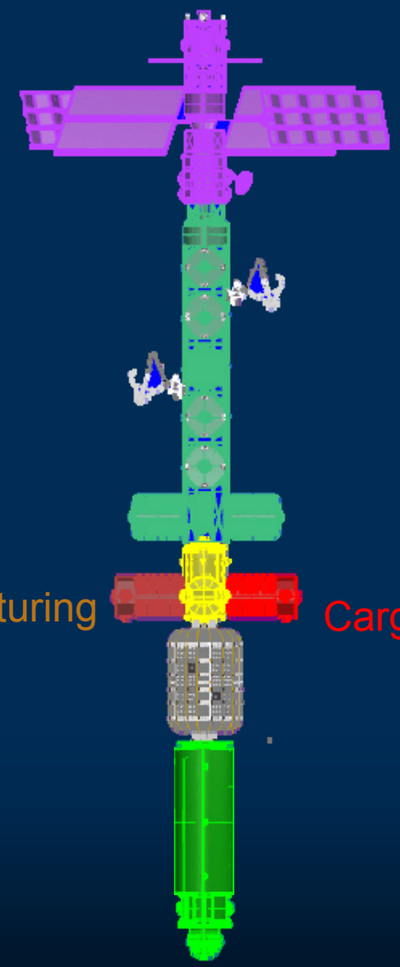

Assembly Process

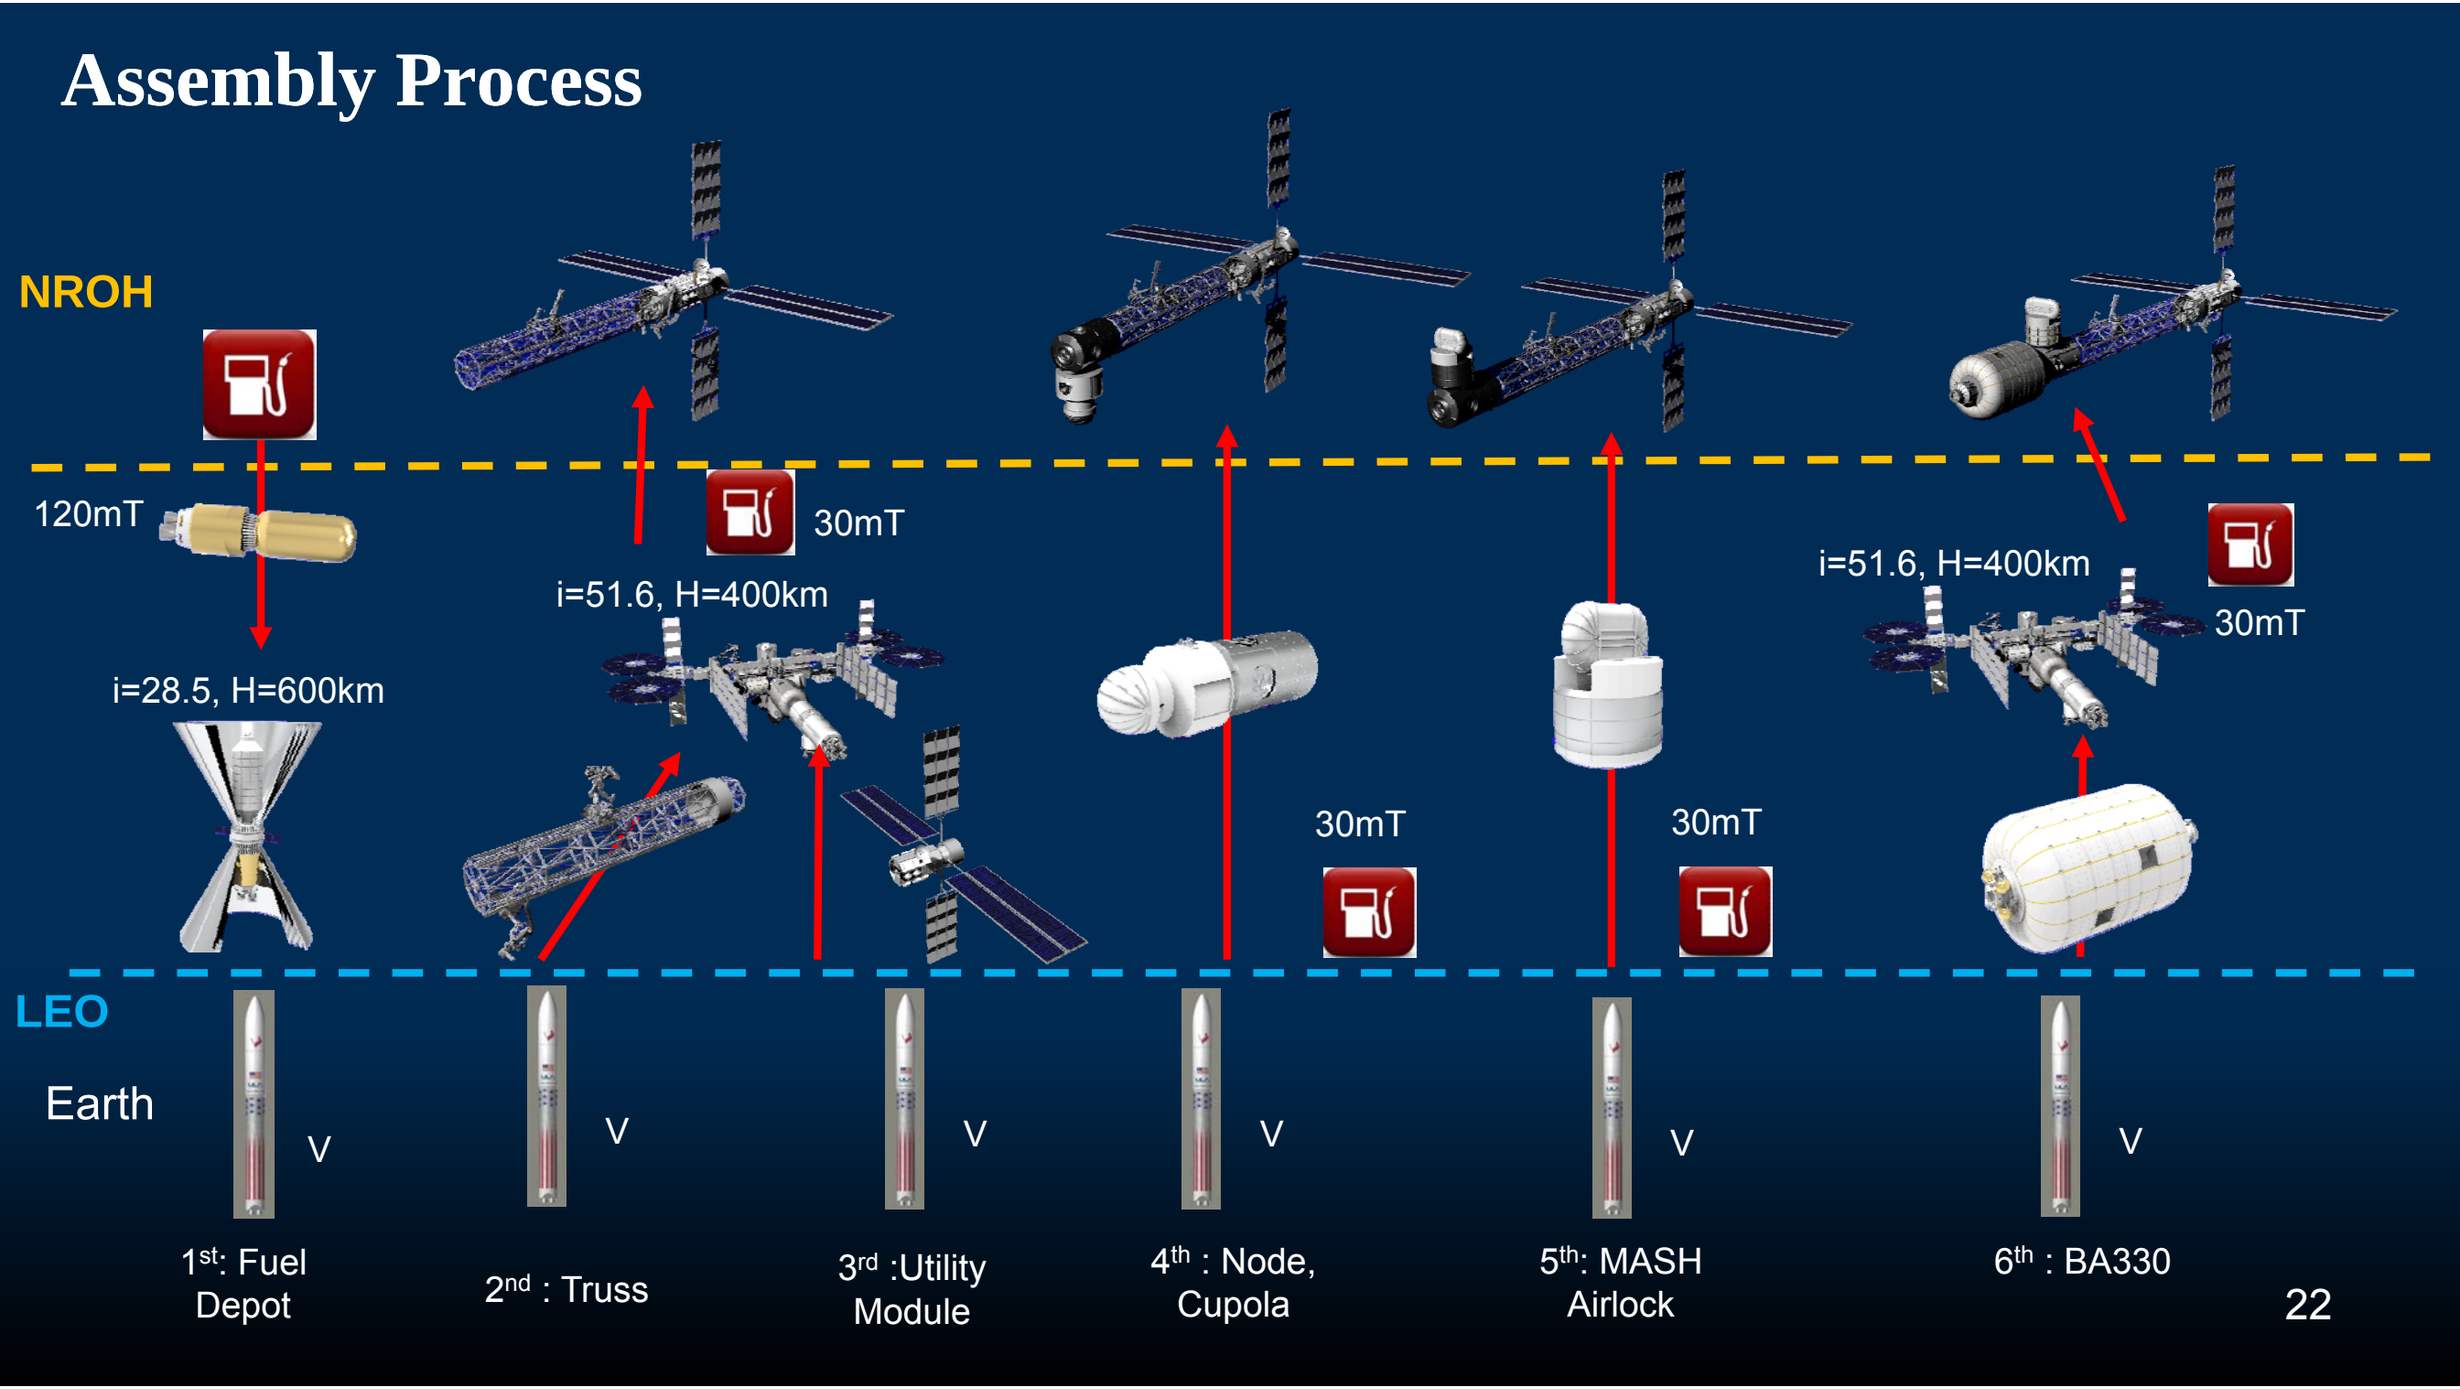

Assembly Process

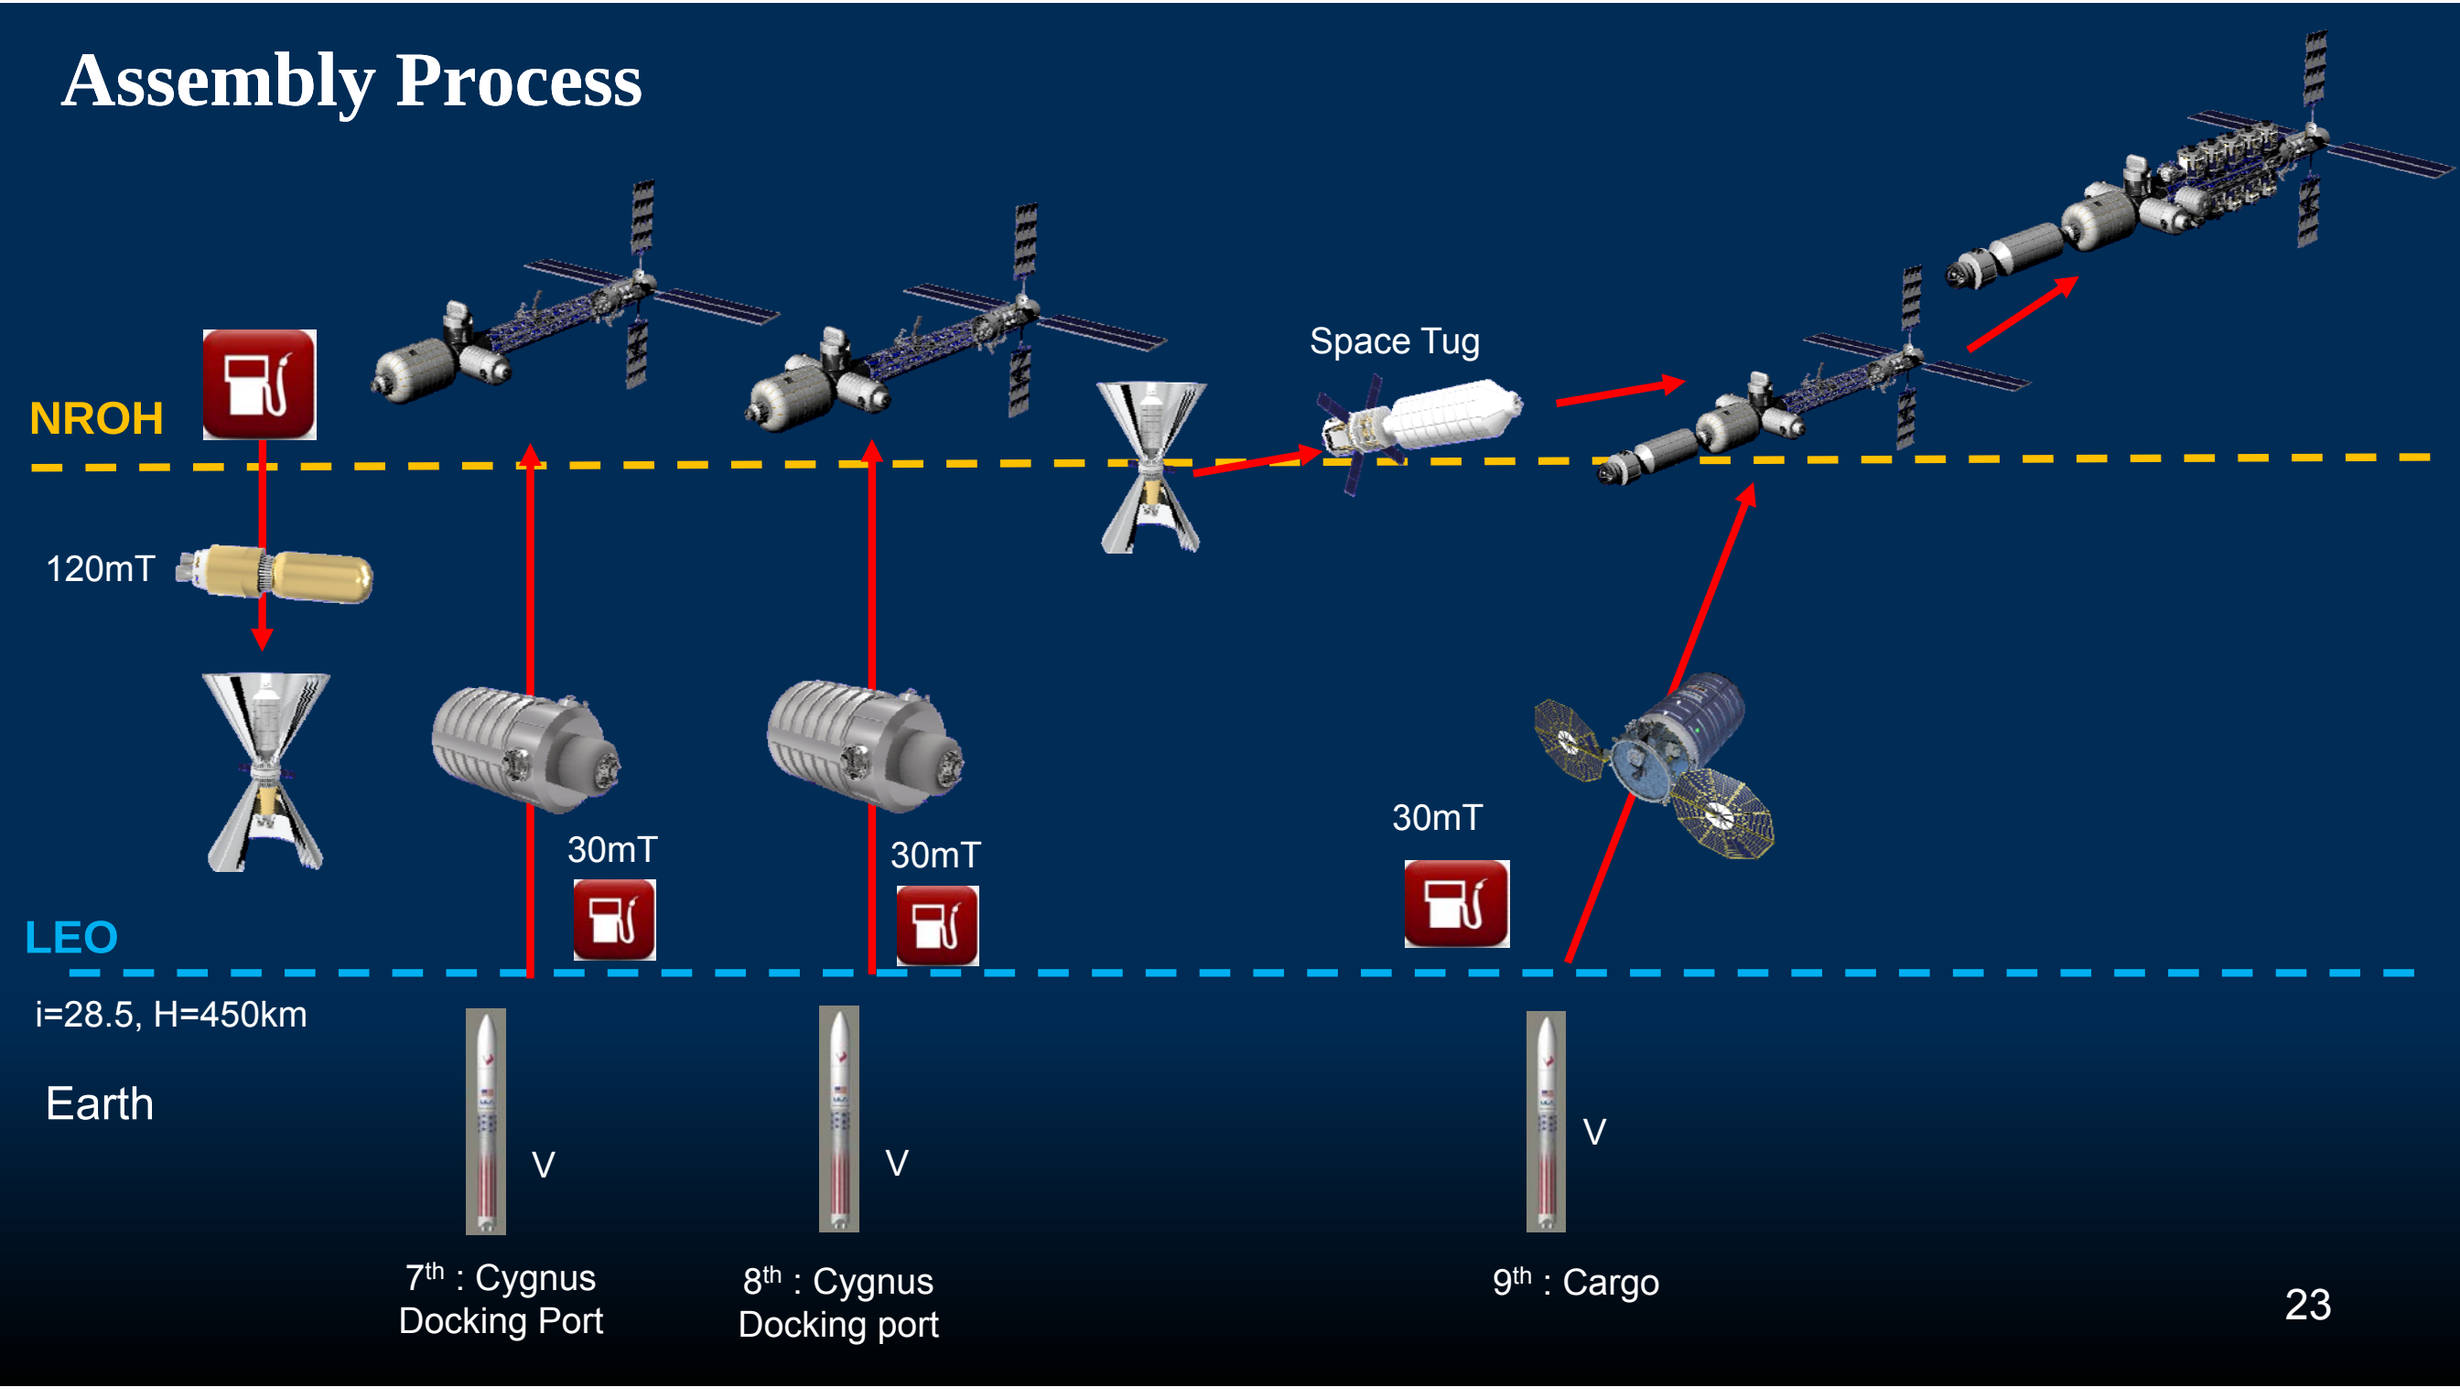

Mission Objective : Ixion Module

❑ **Ixion Module**

Goal: Convert LH2 tank into habitation module

Objective: Crew Quarters, Kitchen, Wardroom, Hydroponics, and stowage

Functional Requirement: Air ventilation, ECLSS sensor, fire suppression, LED light, Communication system, Power, water line

Assembly Method: Autonomous Robot with partially human support

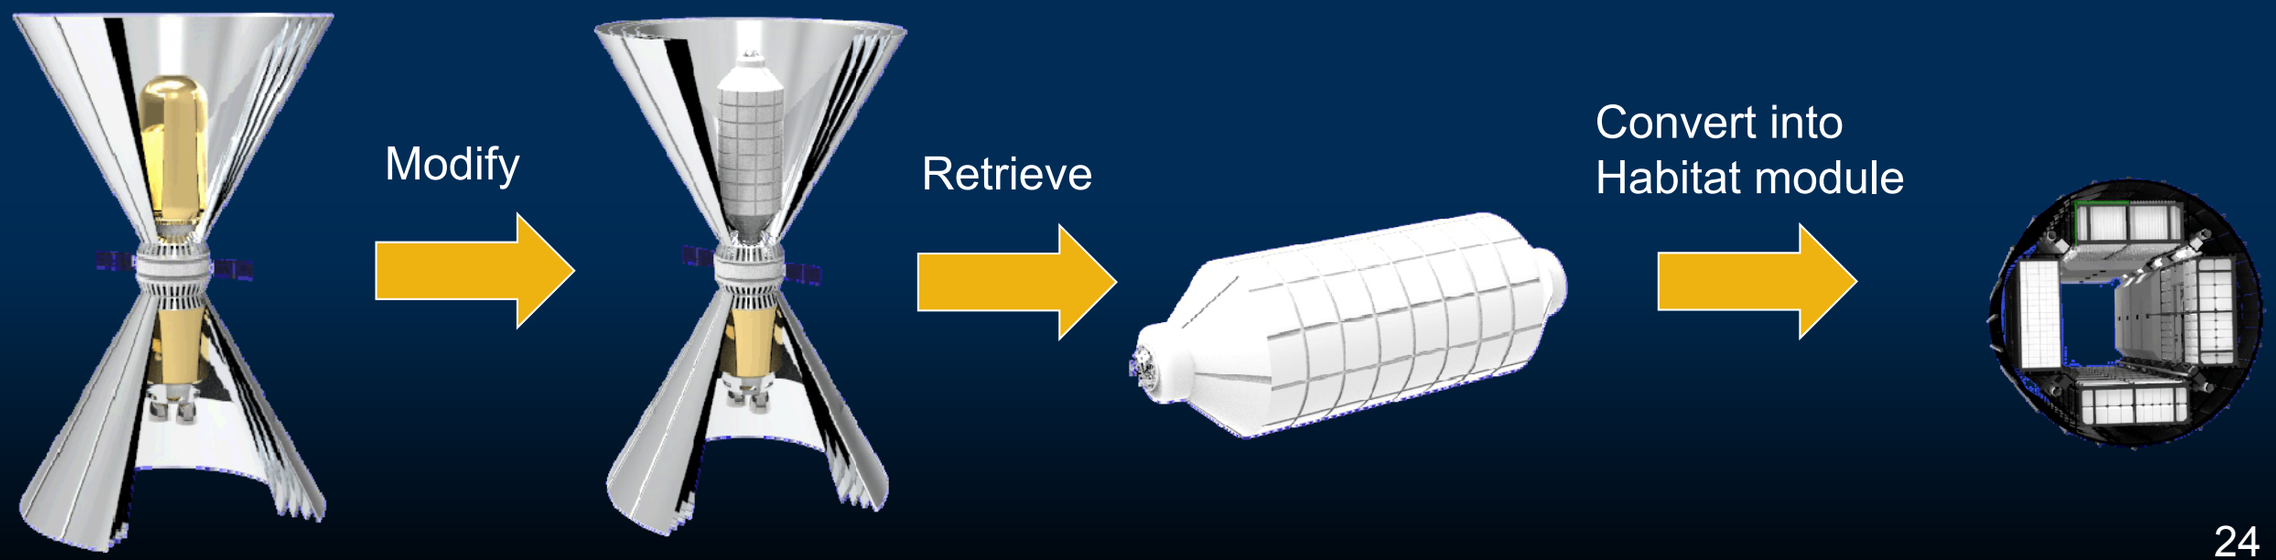

Structure Modification: Ixion Module

- Fuel Depot Modification

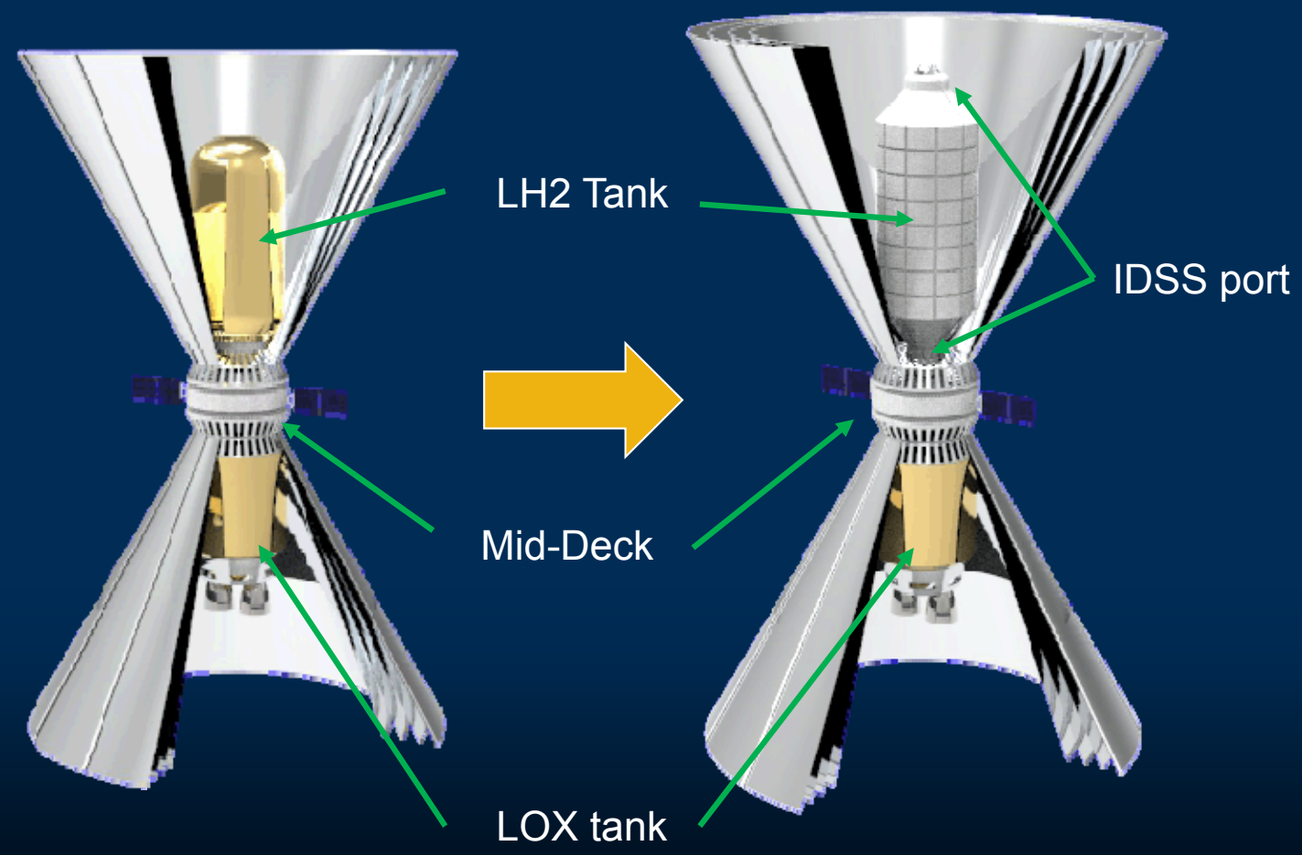

- Customized Ixion Detail

  - IDSS port at the each end of the fuel tank
  - One end node attached on the mid-deck

Length (node to node) = 14.7m

Dry mass = 12.8mT

Volume = 242m^3

Structure Modification: Ixion Module

- Fuel Depot Outer Shell Modification

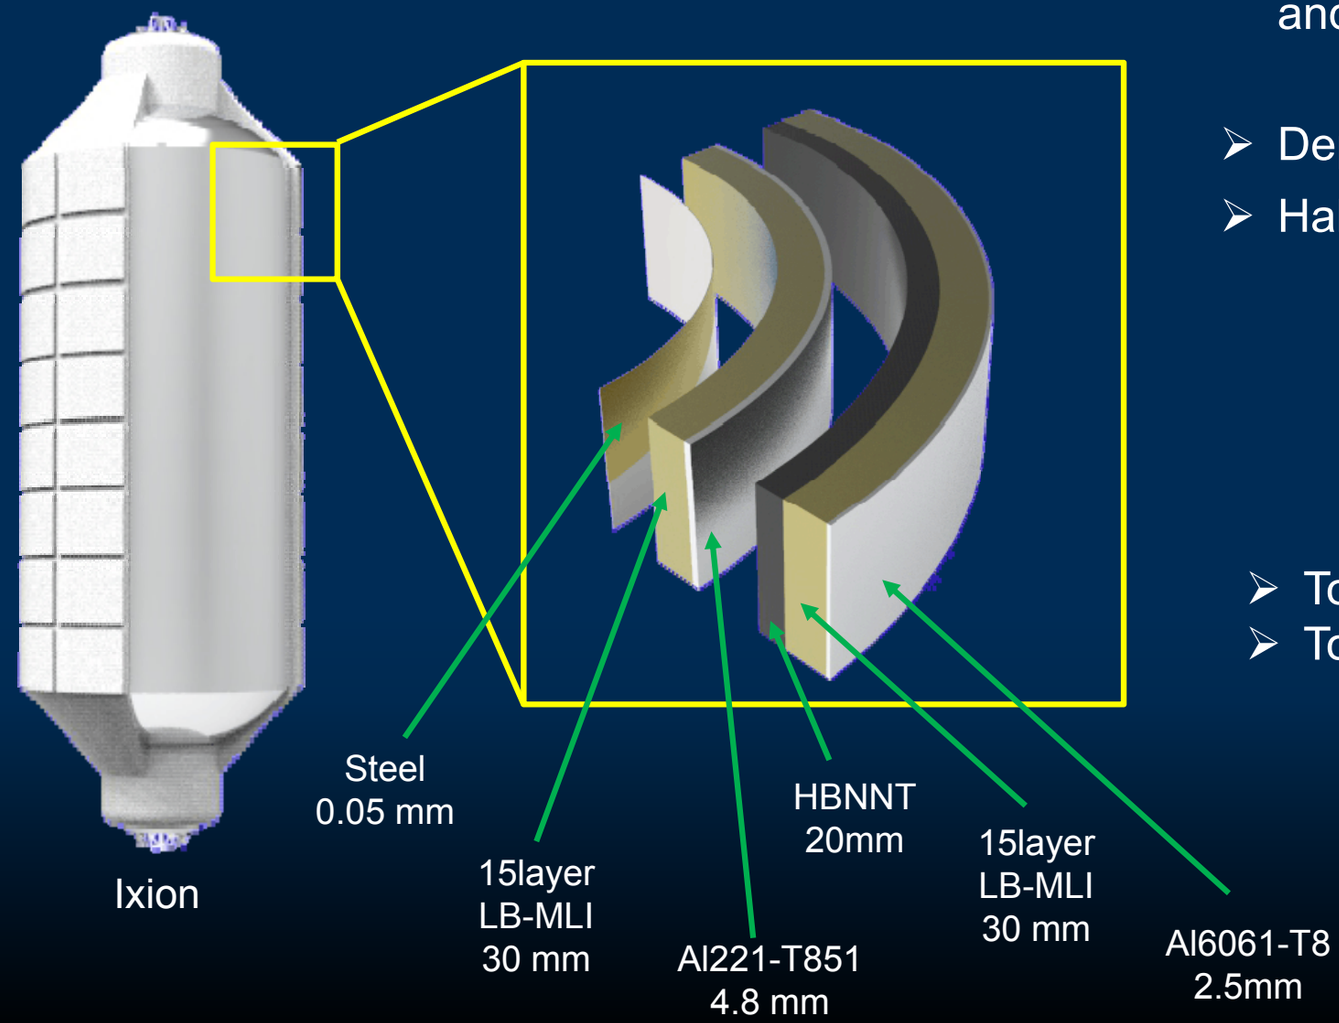

- Functional Requirement for both fuel depot and habitat

  - Depot: < 0.1%/ day LH2 boil-off rate
  - Habitat: Protect from GCR and SPE

    10g/cm^2 Al equilibrium

    Internal pressure = **101 kPa**

    Safety factor = **2.5**

  - Total Mass of External wall = 12.18mT
  - Total Tank Mass = 13.9mT

Design Overview: Ixion Module

- Node and Hatch Design

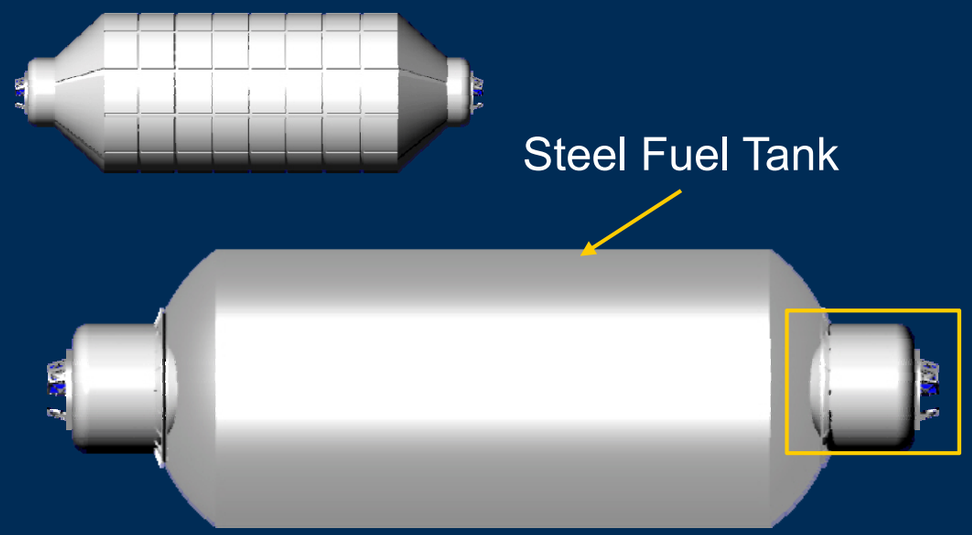

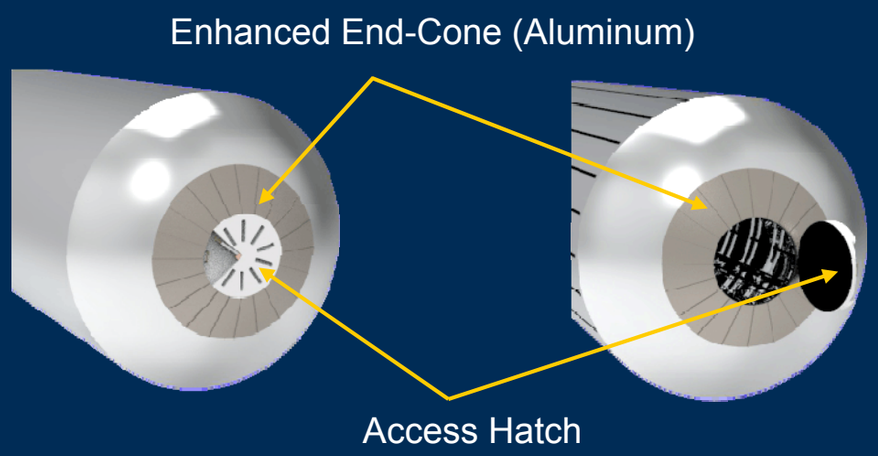

Design Overview: Ixion Module

- Node and Hatch Design

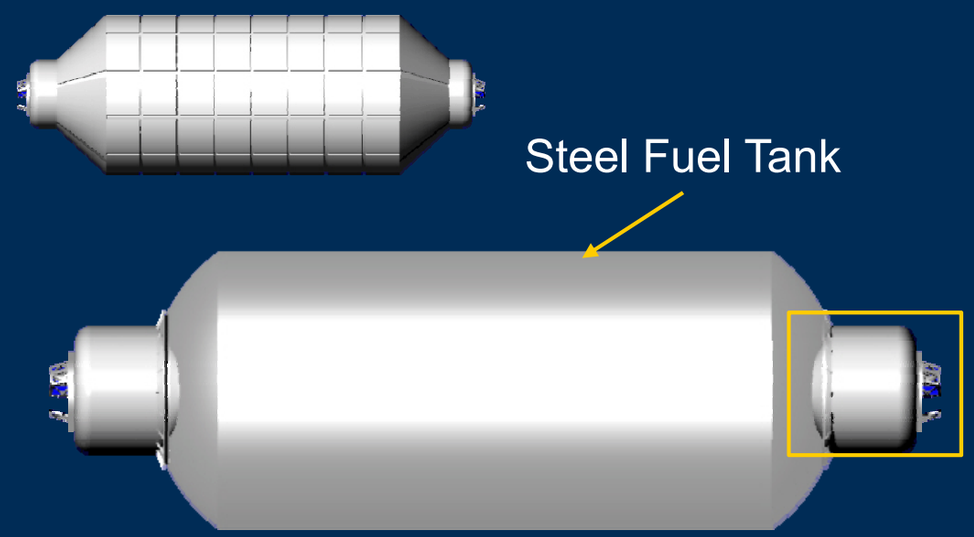

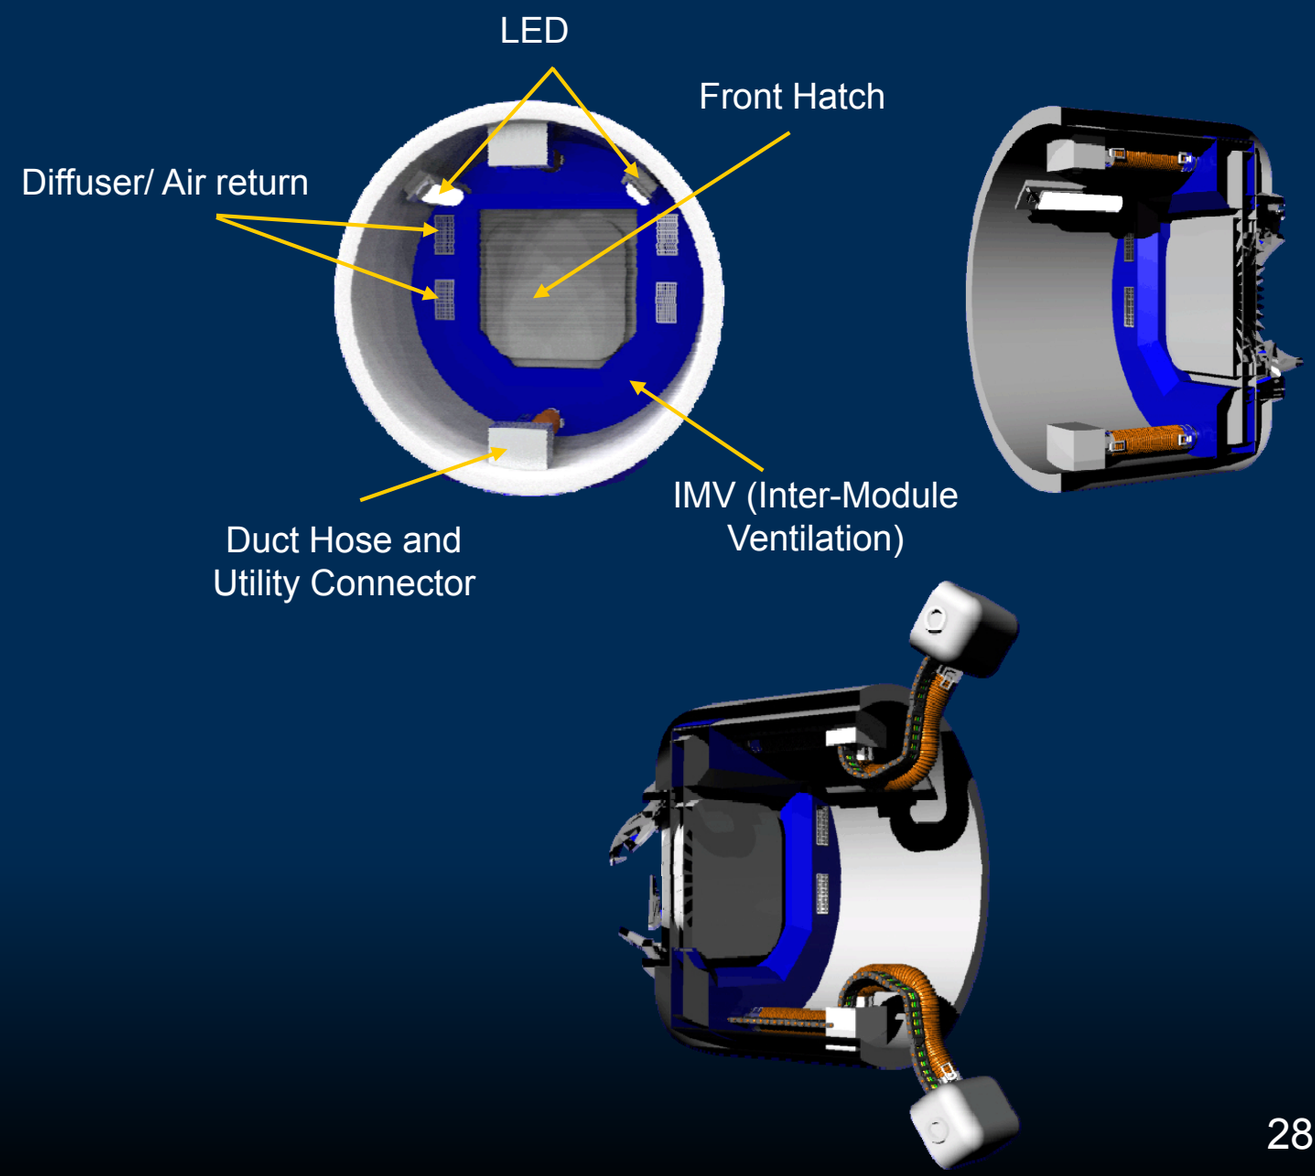

Internal Tank Structure

- Overview of Internal Tank Structurel

Typical Fuel Tank inner frame

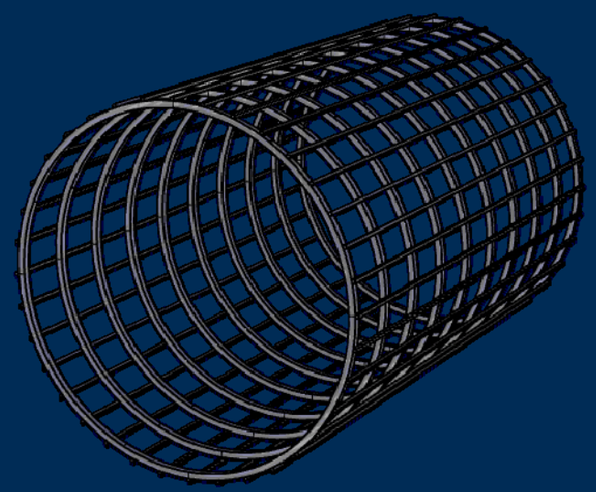

Skin-Stringer

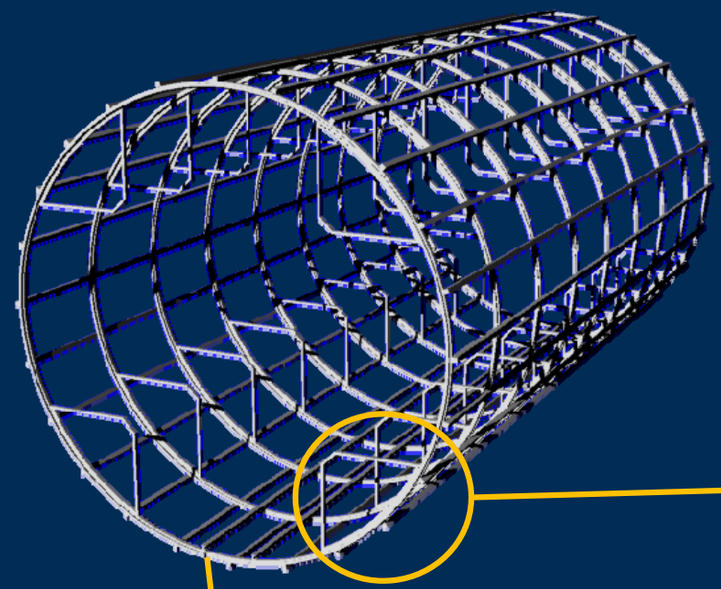

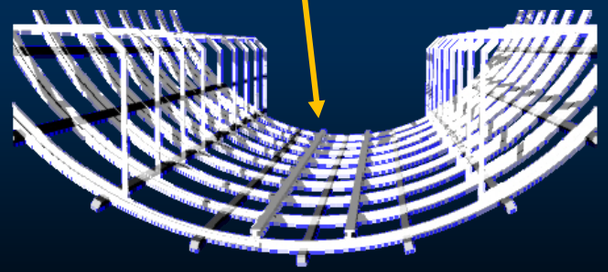

Mobil transfer rail

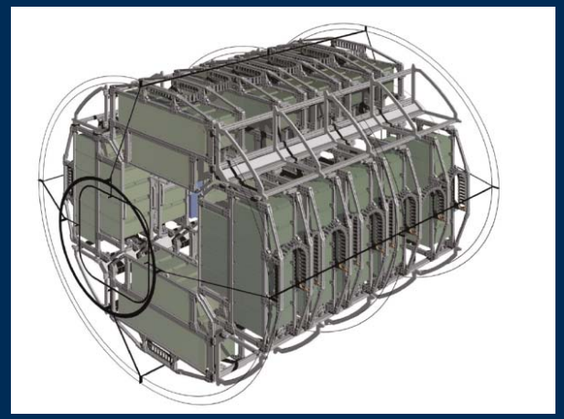

Random Access Frame (RAF)

RAF Edge Frame

Internal Tank Structure

- Overview of Internal Wall

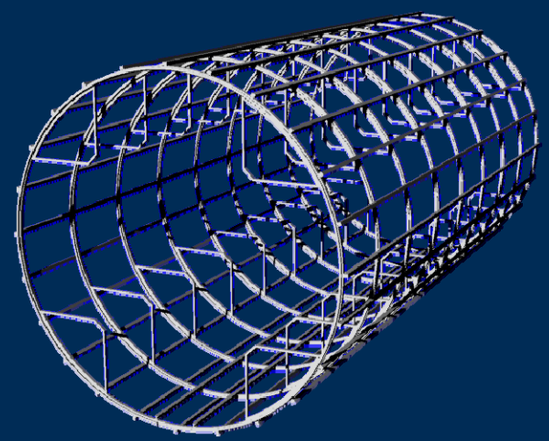

Edge Frame

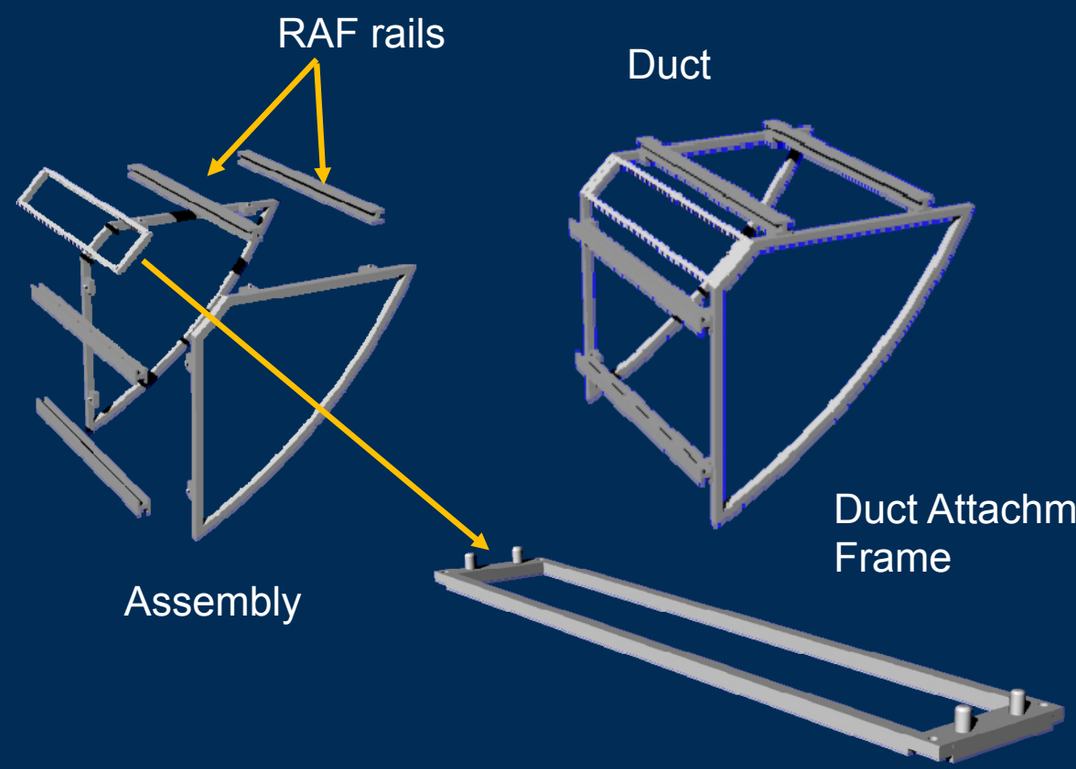

- Attachment and secure Mechanism

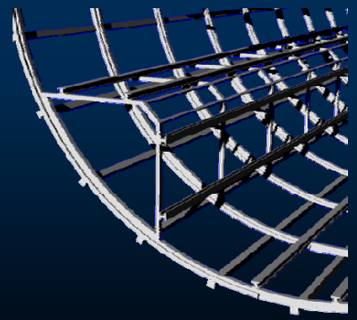

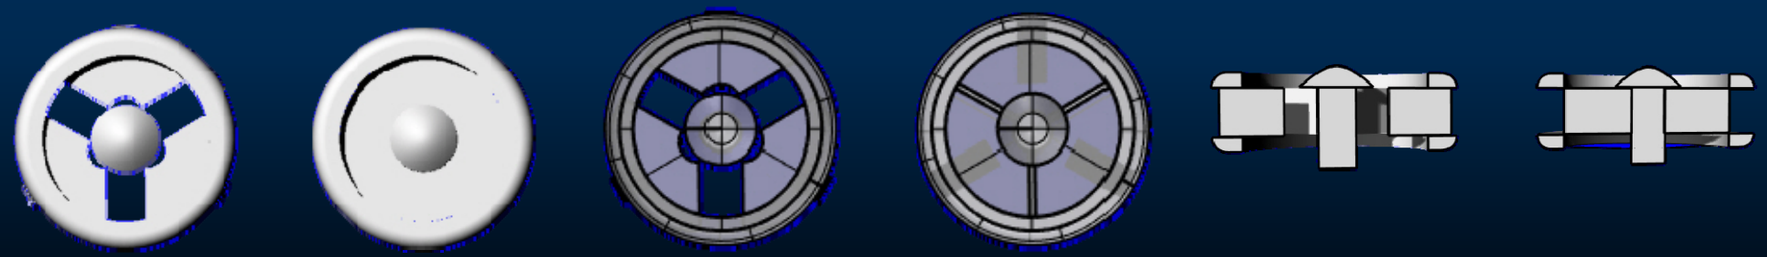

Internal Wall

- Carbon Fiber Reinforcement (CFR) Plate

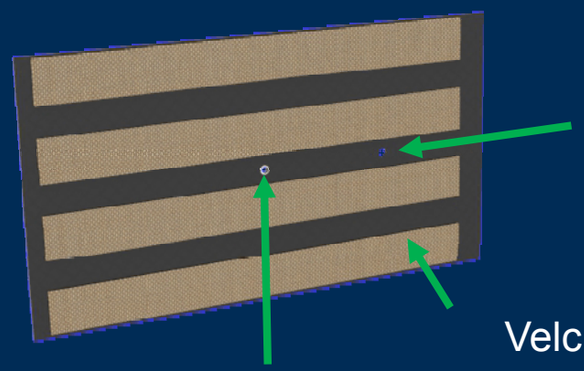

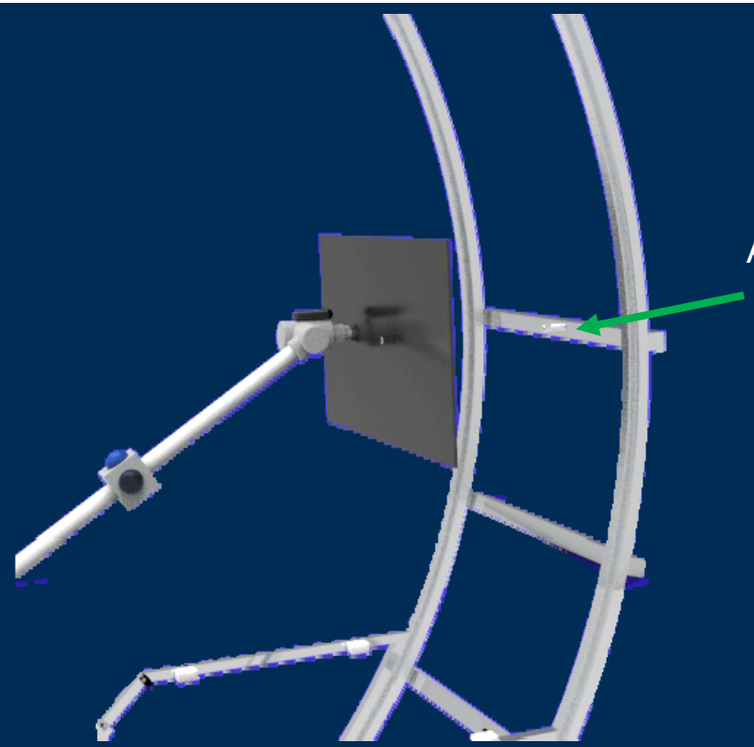

Attach Mechanism

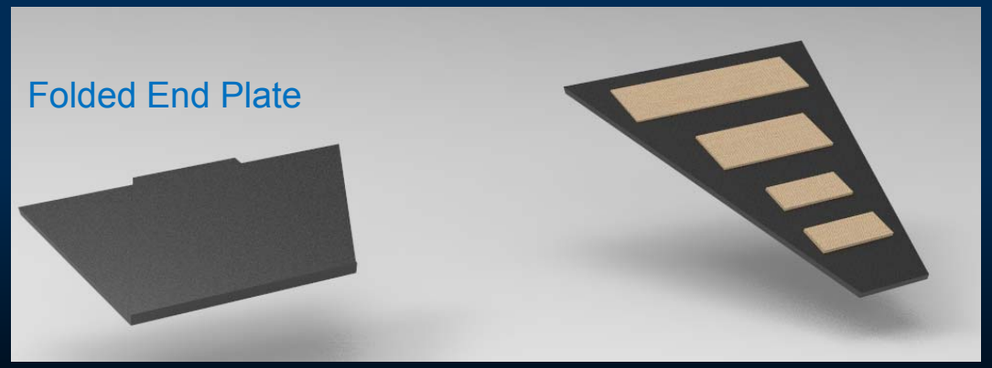

End Dome CFR plate

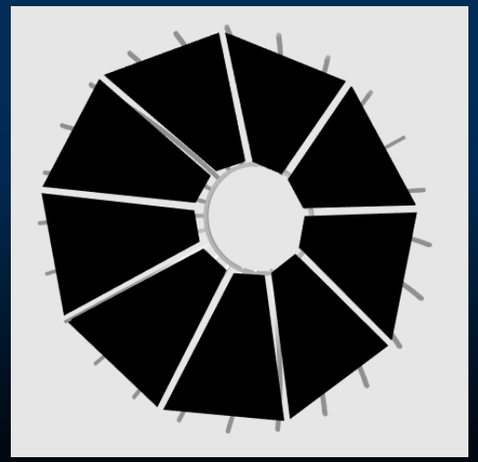

End Dome CFR plate

Internal Wall

- Radiation Shield: Heat Melting Compactor (HMC) Plate
  - Outer Shell Shield =10 g/cm^2 Al equilibrium
  - Inner Shell Shield > 13 g/cm^2 Al equilibrium
  - HMC plate = 60% of PE equilibrium
  - Total thickness of HMC tile = 11.4cm (n=3) = 9.86 g/cm^2 Al
  - Estimated Compressed MCTB Thickness = 5cm = 7 g/cm^2 Al
  - Total inner radiation shield = 16.86 g/cm^2 Al

HMC tile: **40.6×40.6×3.8cm**

- Input = 1100kg garbage, Output = 800kg HMC tile
- Required: 6336 kg HMC = 8,712kg garbage
- 4 crew for 10 years at DSG from 2025
  = 16,060kg garbage
- 4 crew for 5 years on the Moon from 2030
  = 8,030kg garbage



Garbage

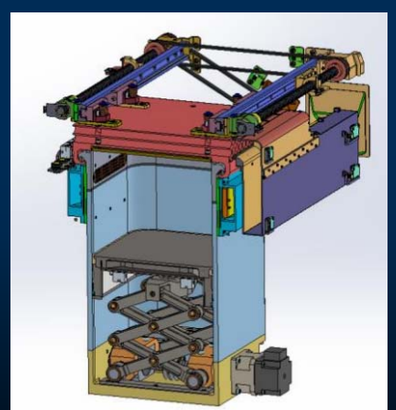

HMC

3×

HMC tile

42×50×50cm

MCTB

Velcro tape



Packed HMC tile
42×20×50cm

Interior System

- HMC Radiation Shield

  Total 570 MCTB or 1710 HMC tiles

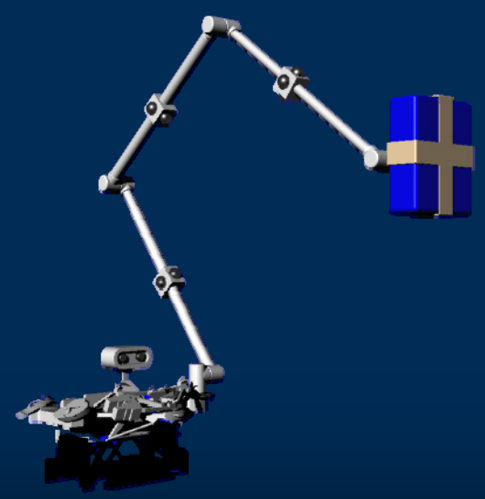

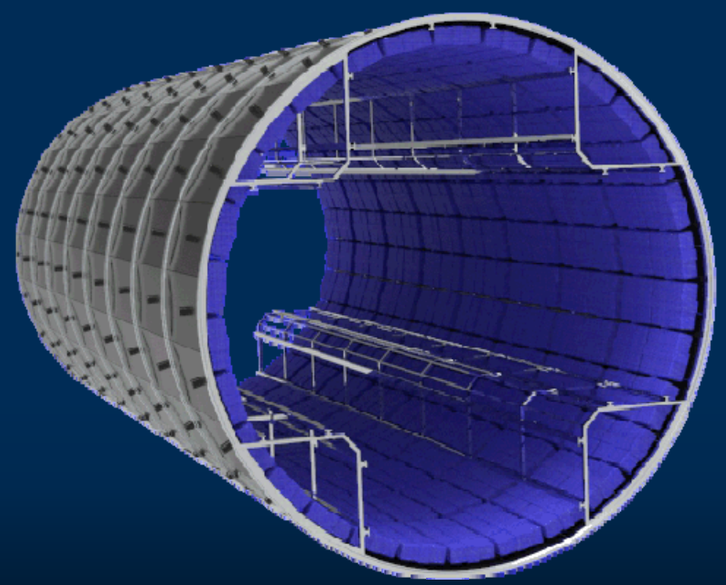

End Dome

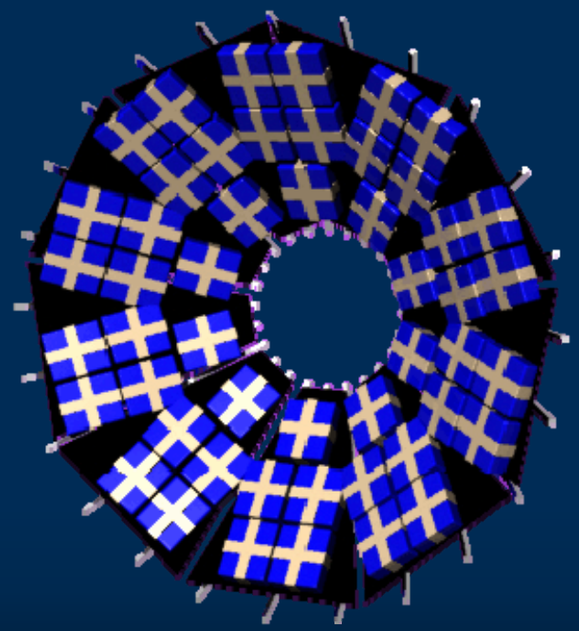

Interior System

- Diffuser, LED lighting, Sensors

Diffuser/ Return Air Fan Assembly

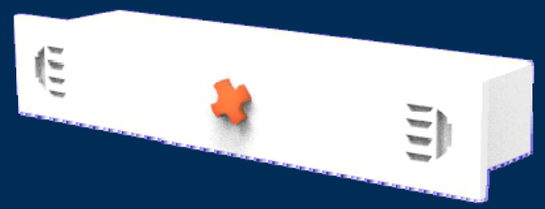

Utility Board

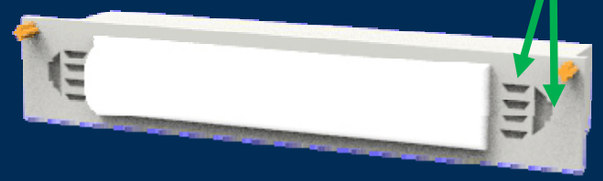

LED

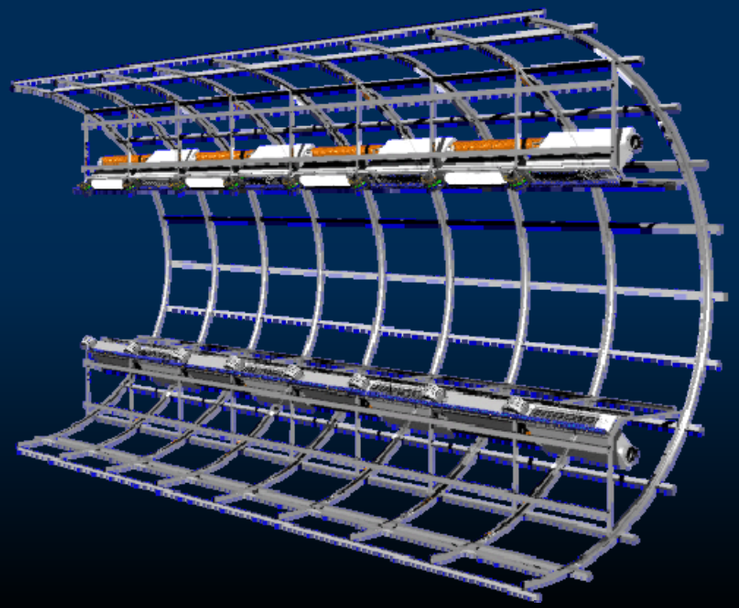

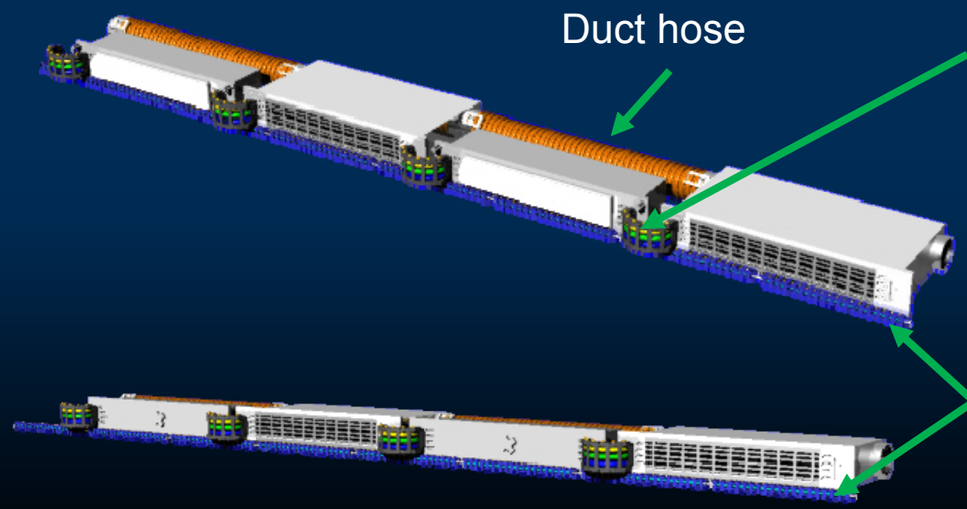

Interior System

- Diffuser, LED lighting, Sensors

Diffuser/ Return fan Assembly

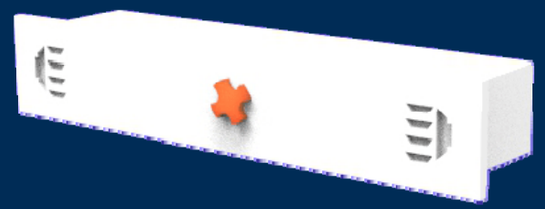

Utility Board

Utility Connector

LED

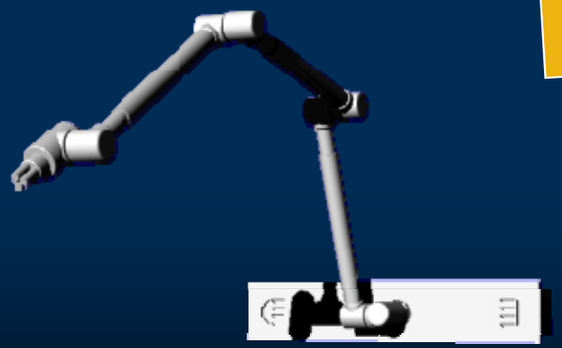

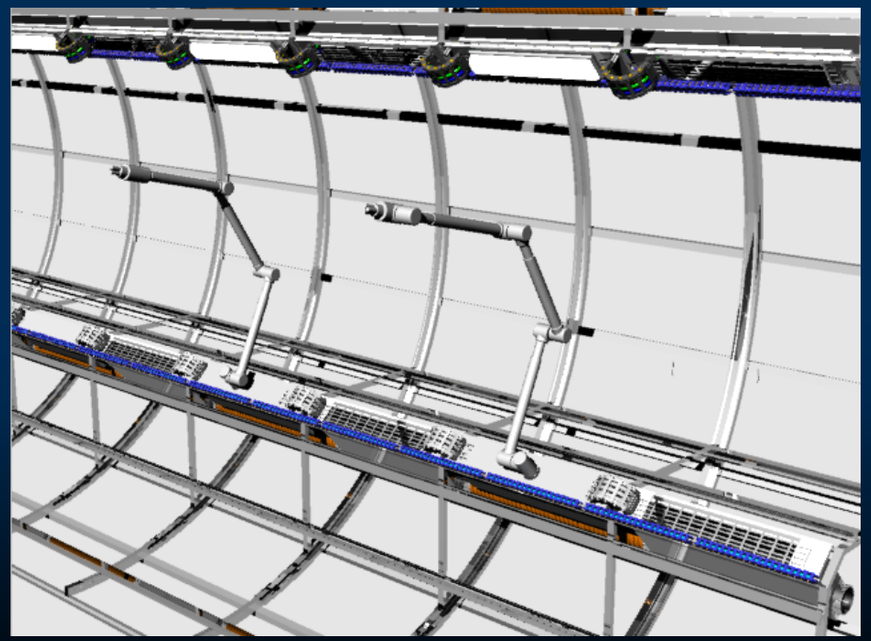

Interior System

- Air Ventilation

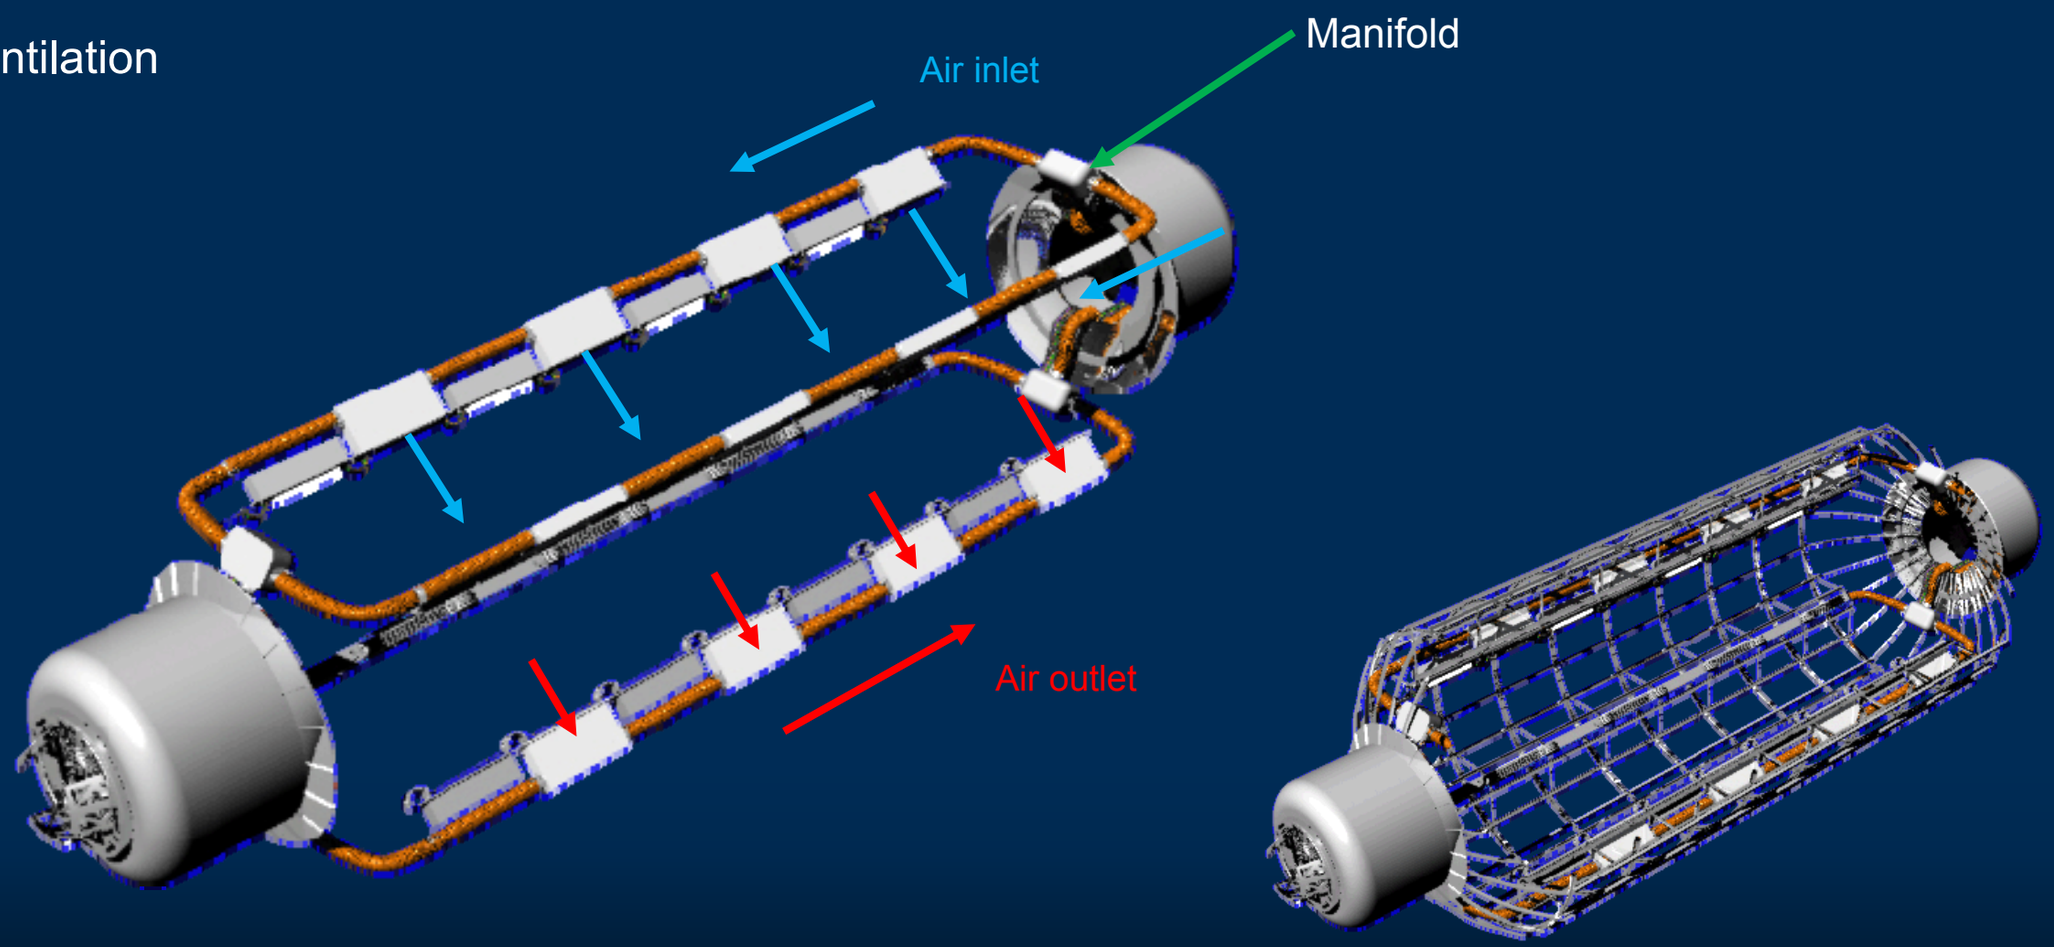

Ixion Outfitting: Functional Arrangement

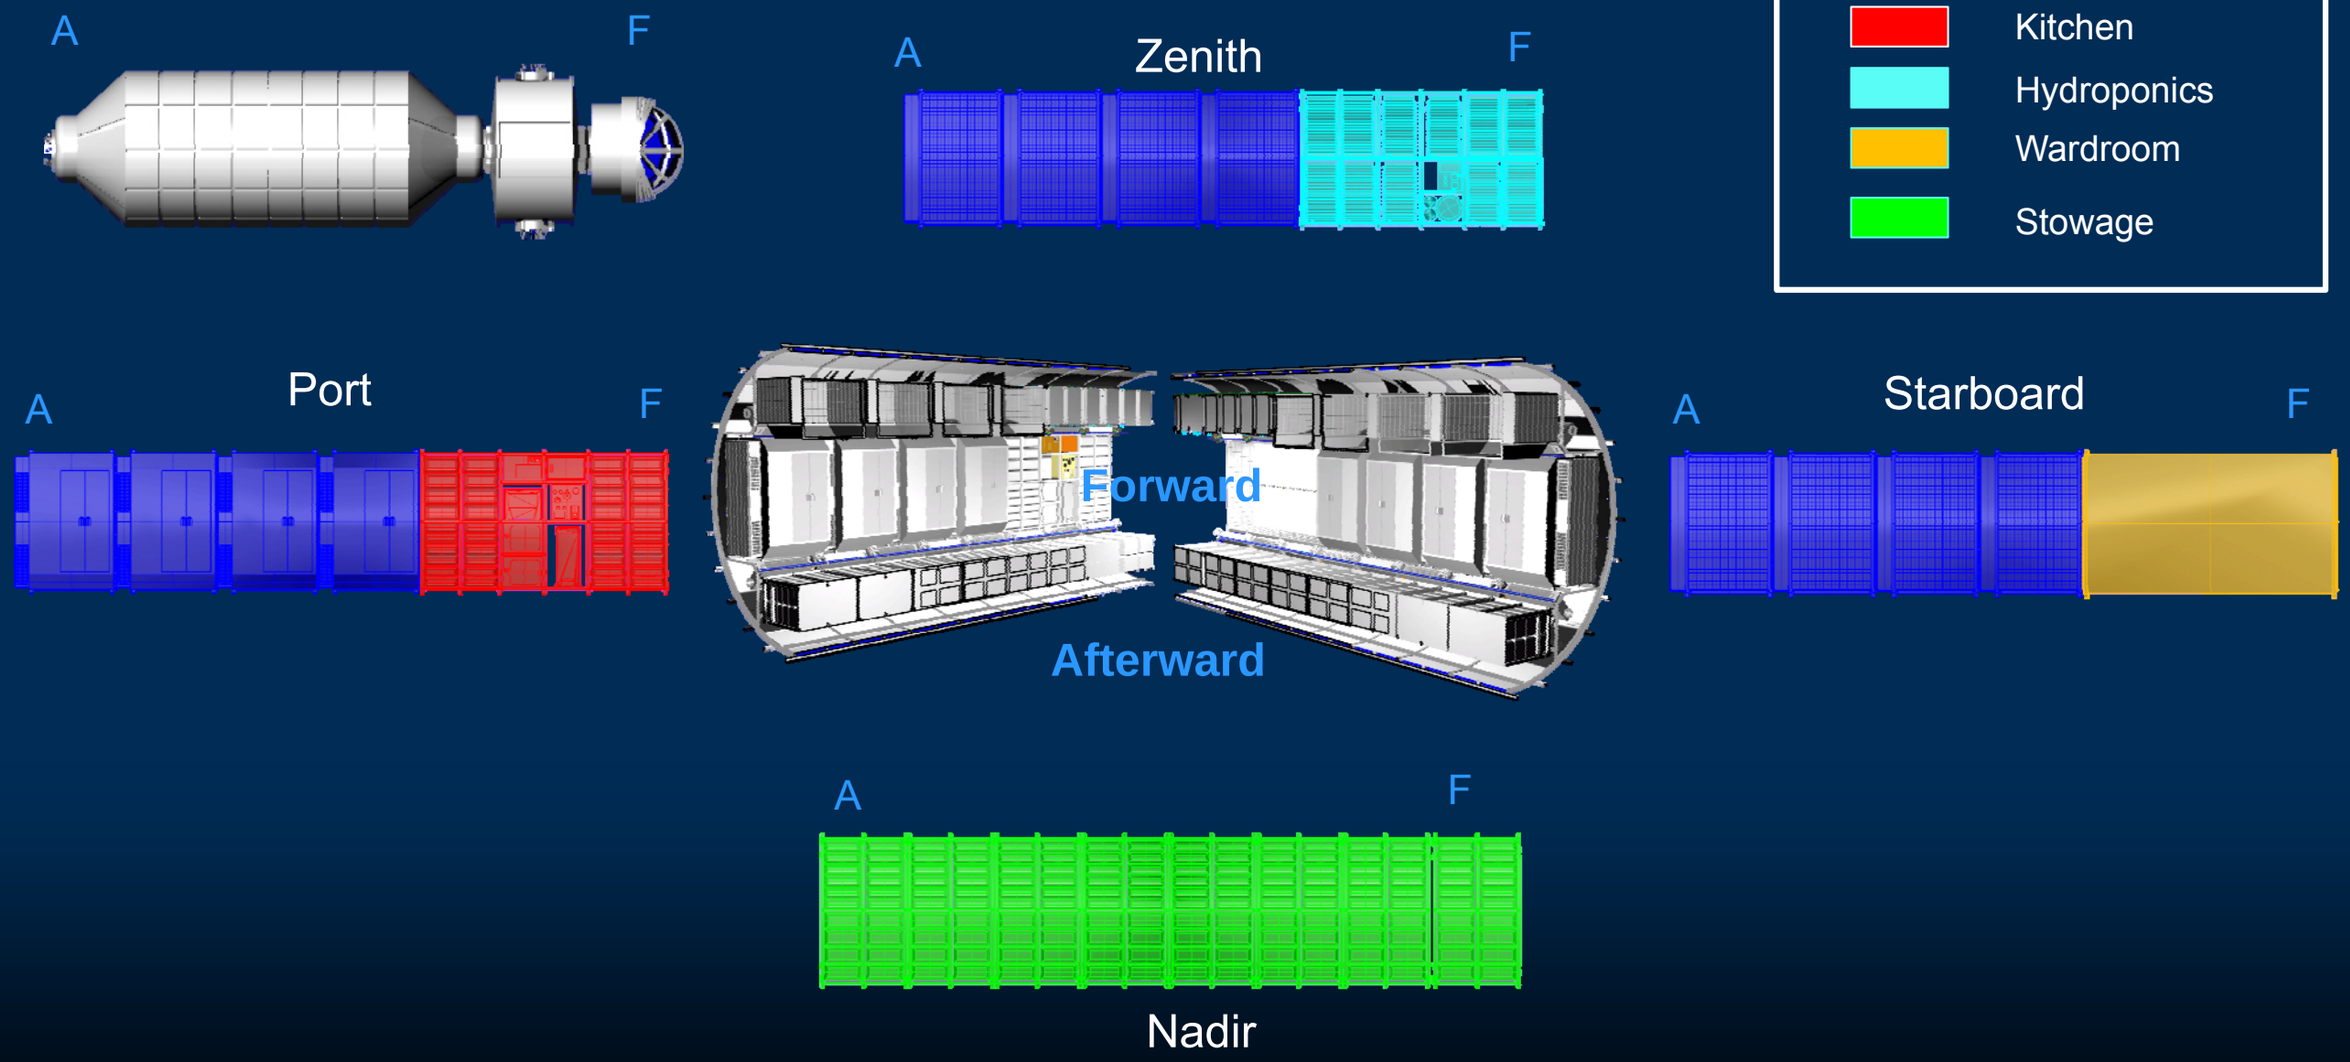

Interior System

- Craw Quarter
  - CQ Functional Requirement:
    - Air Ventilation
    - LED Light
    - Utility cable

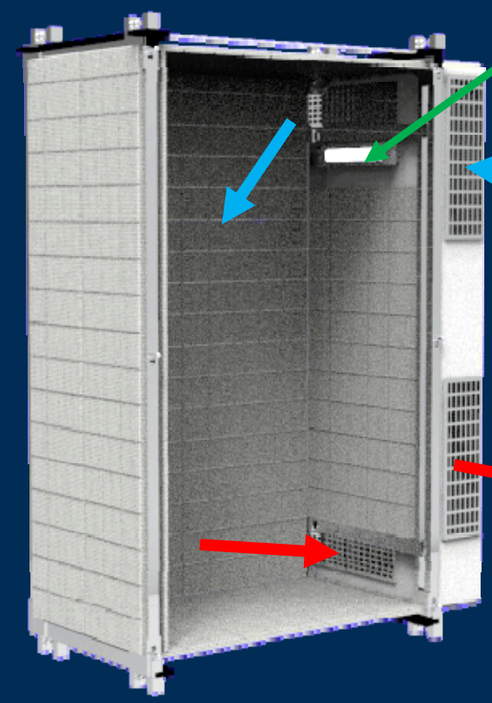

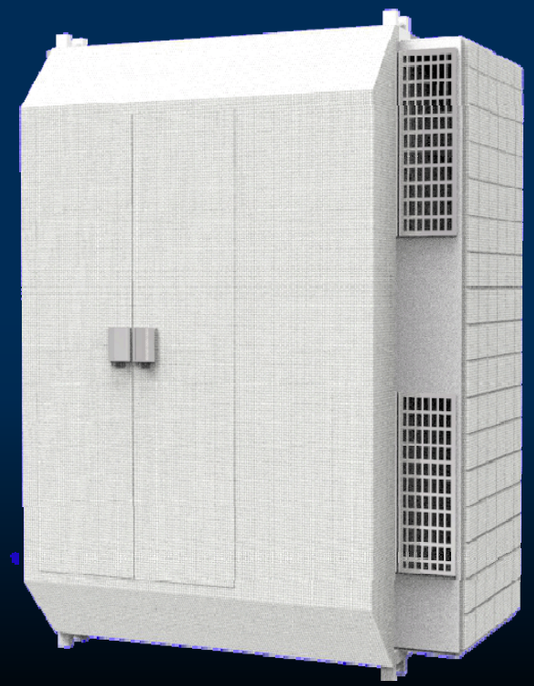

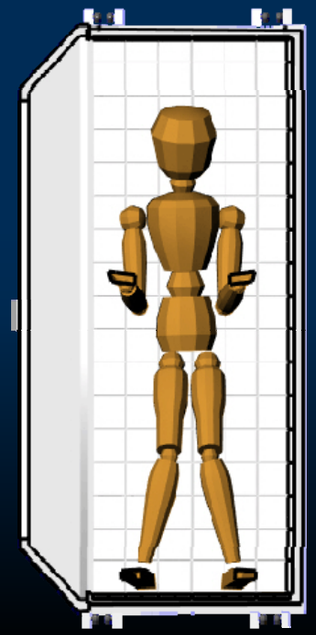

- CQ Dimension:

W= 1.2m, L=1.0m, H= 2.0m, V= 2.28m^3

- Ventilation Assembly

W= 0.2m, L= 0.7m, H= 1.7m

Interior System

- Craw Quarter Assembly

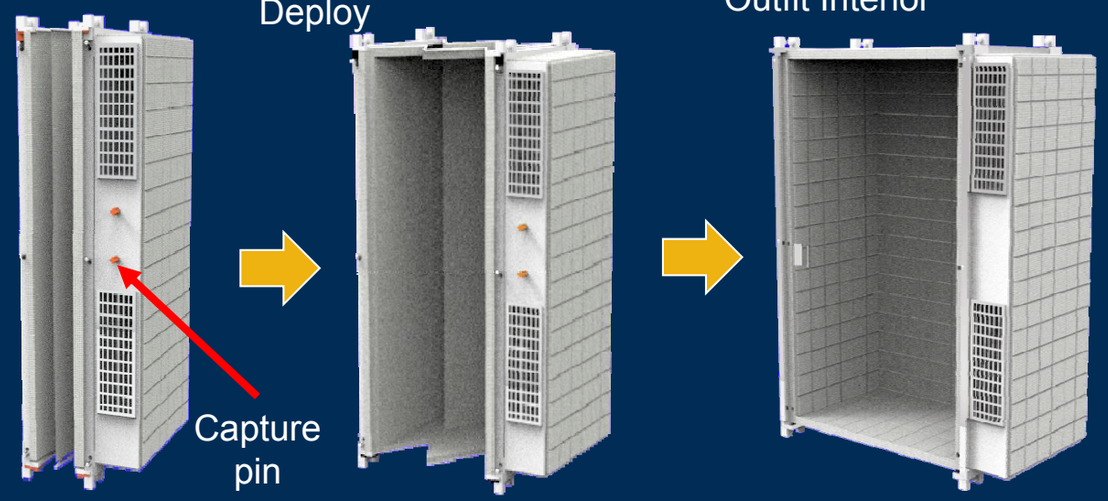

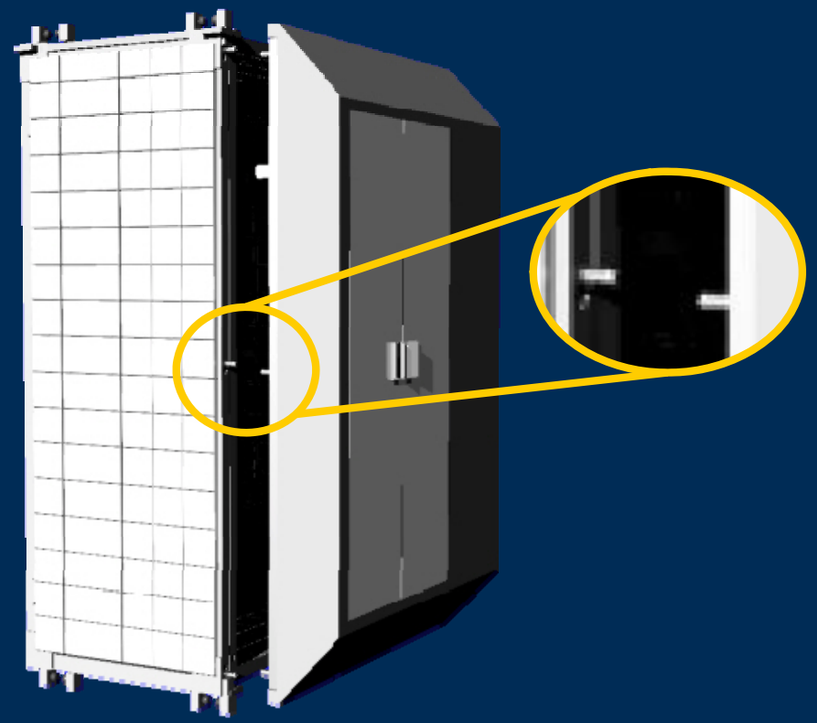

Fold Door Assembly

Deploy

Pop-up

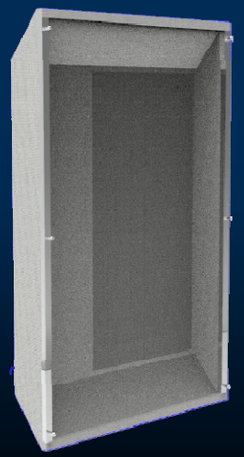

- Attachment Mechanism
  - Rotation Lock

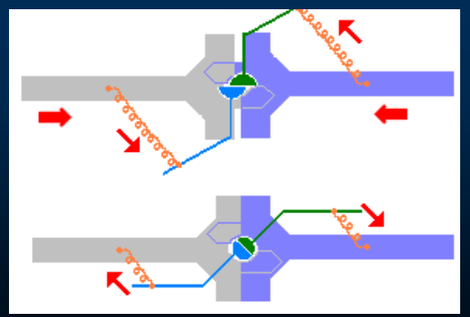

Interior System

- Kitchen/ Wardroom

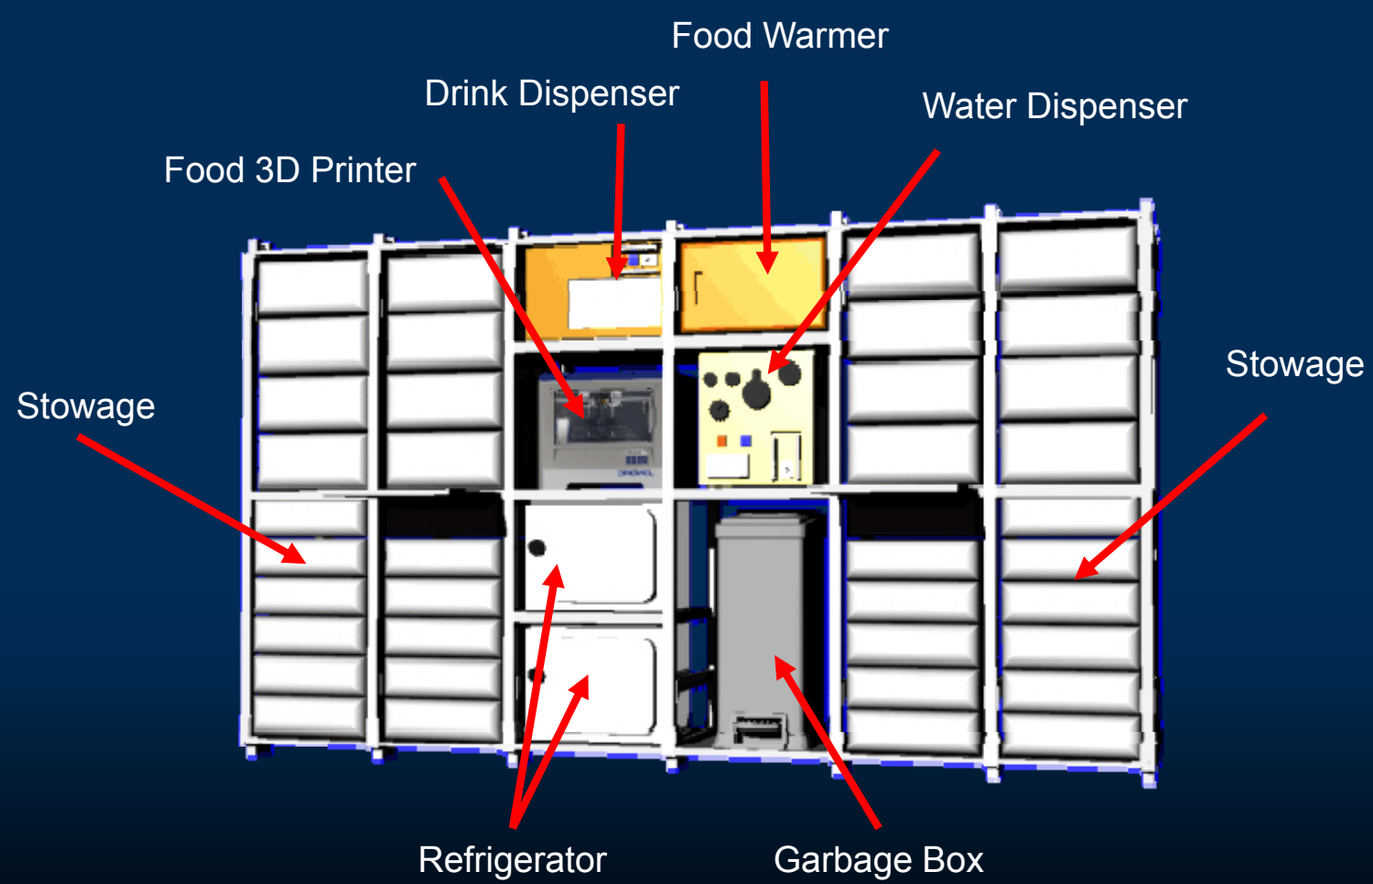

Interior System

- Virtual Window/ Projector

Virtual Window / Projector
(W: 3m × L: 0.8m × H: 2m)

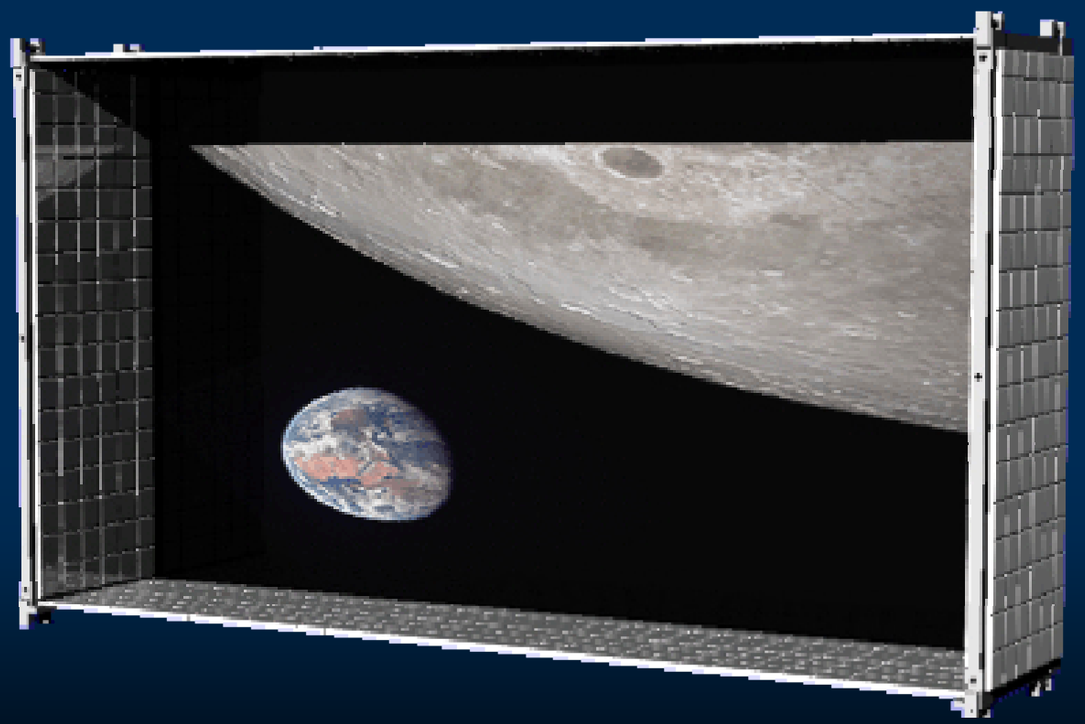

Folded
(Thickness: 0.14m × L: 0.8m × H: 2m)

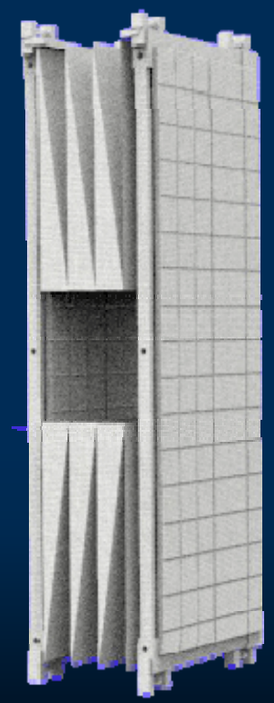

Deploy

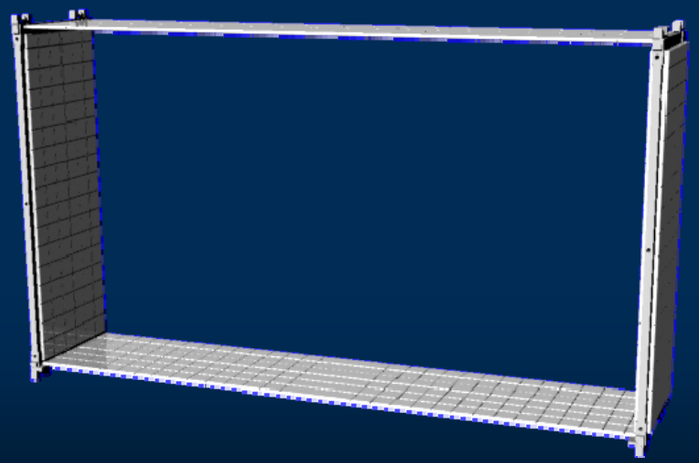

Interior System

- Hydroponics

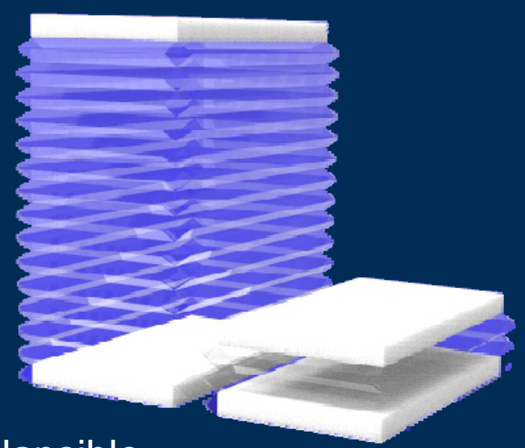

Collapsible Hydroponics

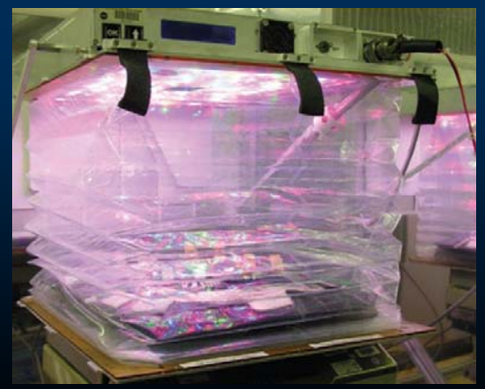

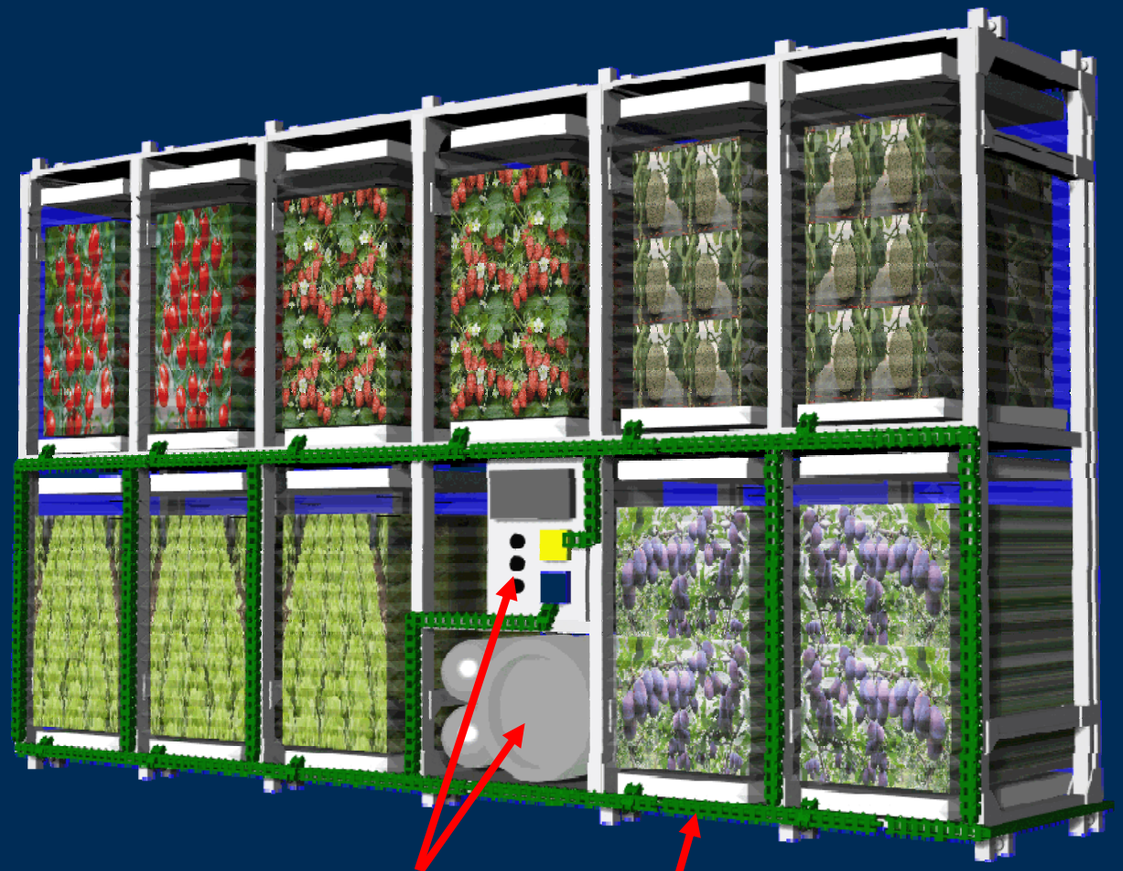

Interior System

- Cargo
  - Ixion has capability to store **18m³** (2m³ each stowage)
  - Cloth, food, spent items, spare parts,

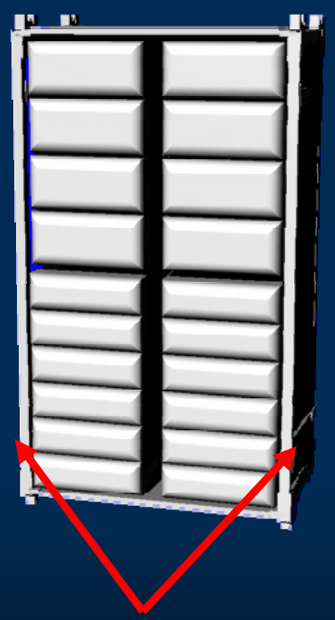

RAF Frame

Folded Cargo Space

Deploy

Ixion Outfitting: Hardware Requirement

- FARO 3D Laser Scanner

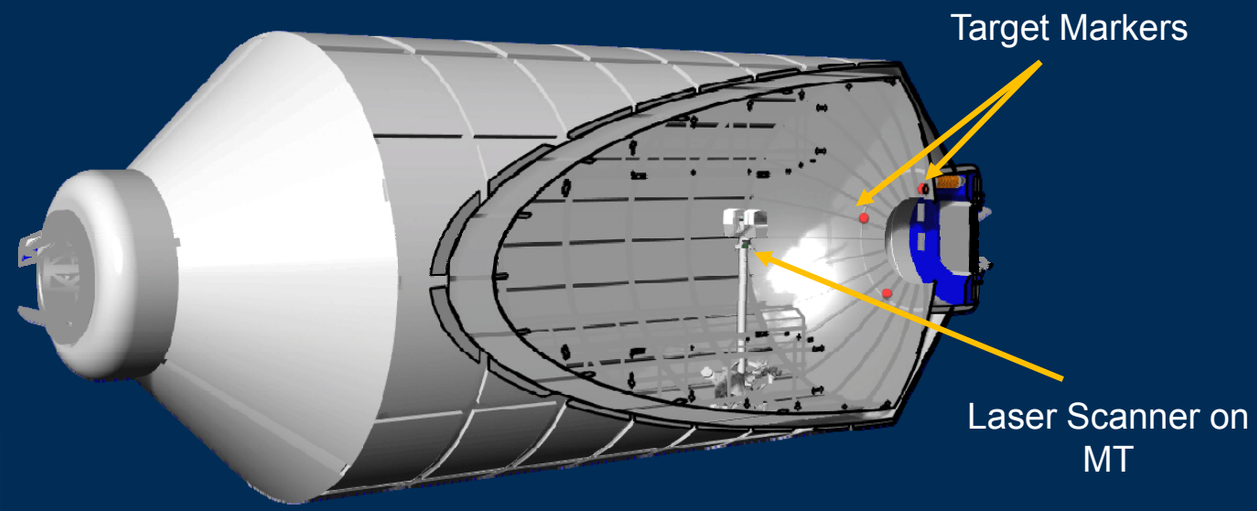

Scan Image

CAD DATA

Coordinate Alignment

Justify to assembly objects at appropriate position

- Distance accuracy up to ±1mm
- Range from 0.6m up to 70m

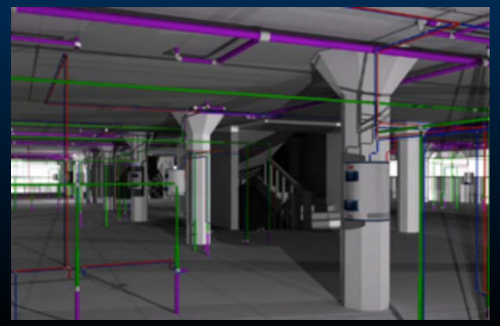

Ixion Outfitting: Assembly Hardware Requirement

- Autonomous Assembly Robot (A2R)

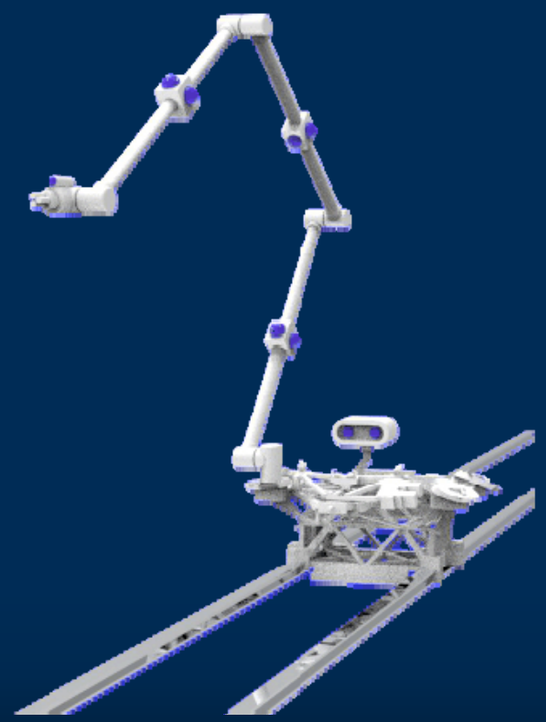

Robotic Arm

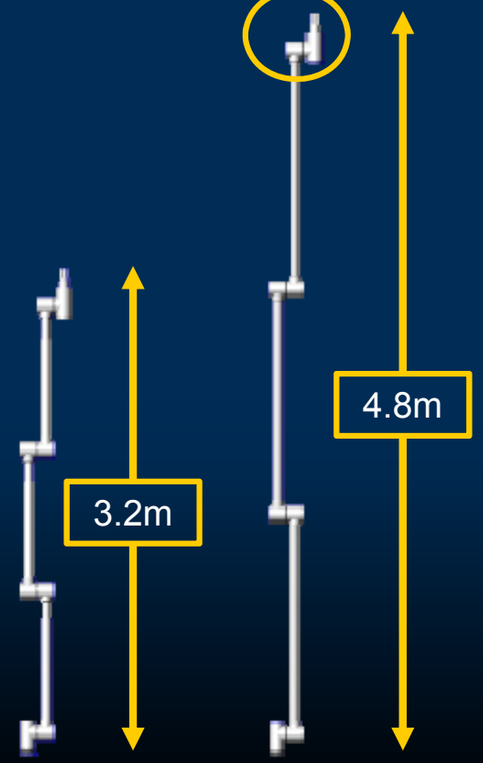

Capture mechanism

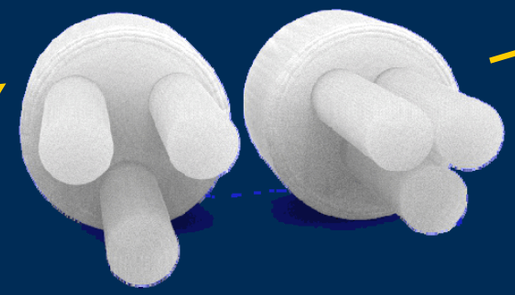

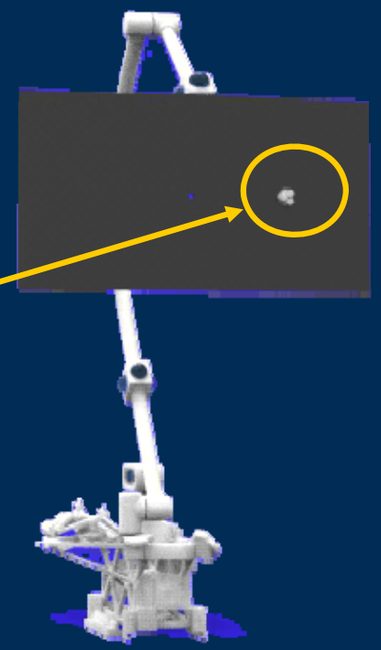

Power: Li-ion Battery
Wireless Communication

Ixion Outfitting: Hardware Requirement

- Robonaut 2

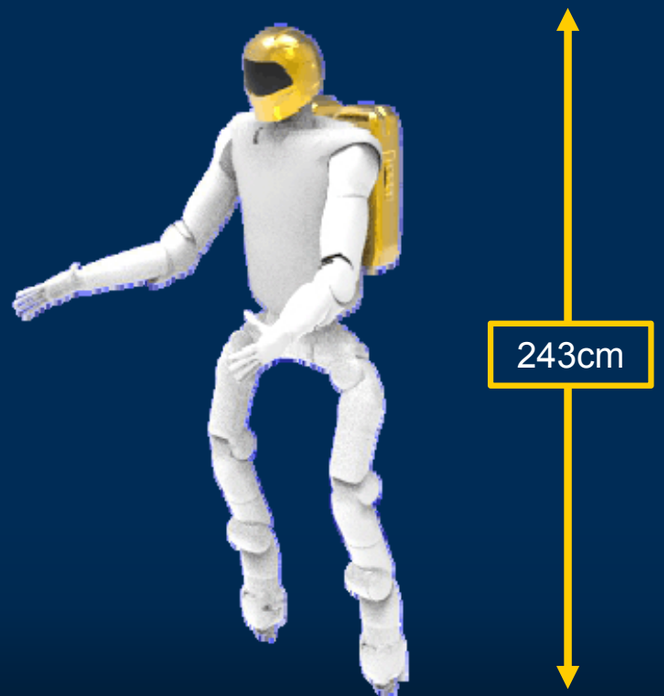

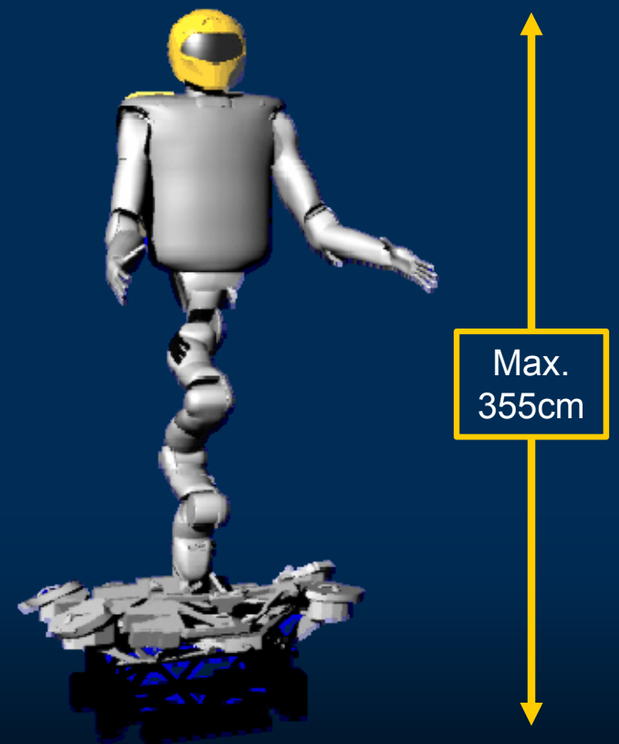

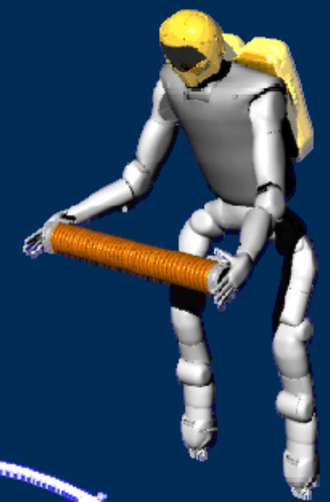

Ixion Outfitting: Hardware Requirement

- RFID: Radio Frequency Identification
  - Identify the location of the Cargo
  - " Just-In-Time" system

Assembly → Detect Location → Pick up → Transport → Assembly

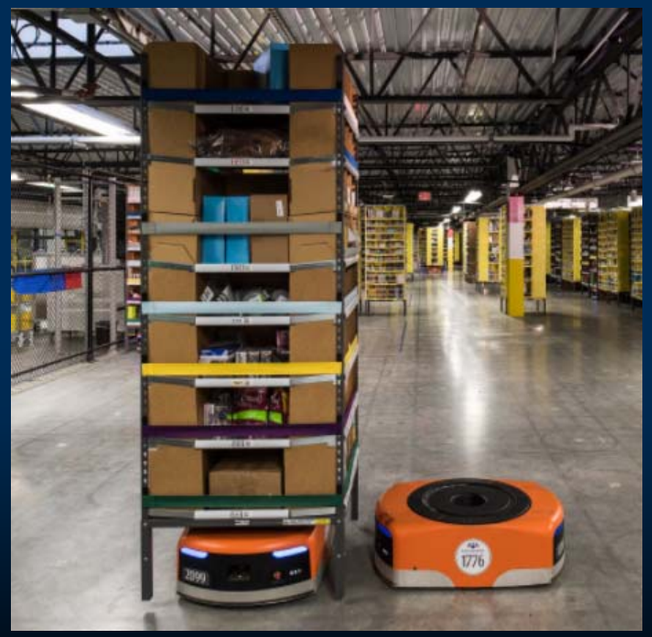

- Cargo Transfer Scenario

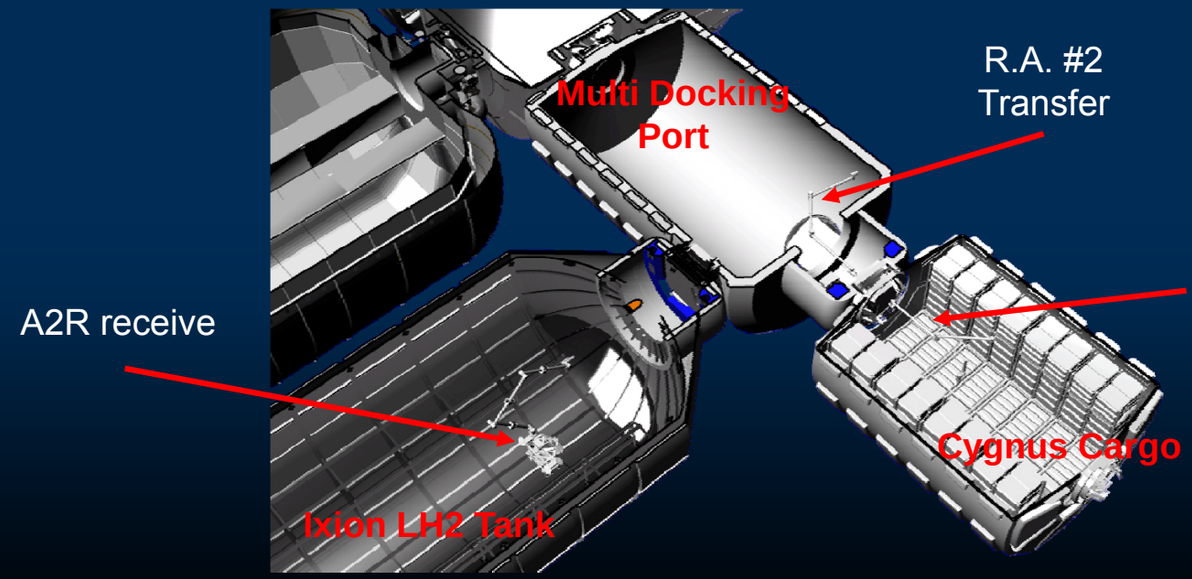

Assembly Process

A: A2R, R: R2, H: Human

1. Vent all residual Propellant and gas

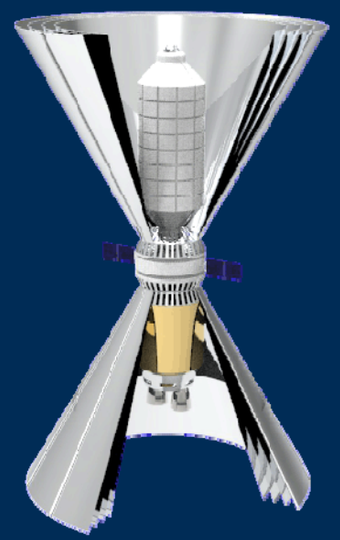

2. Transfer to AXIS

Space Tug

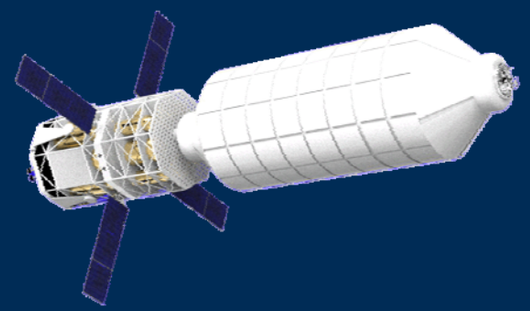

3. Docking

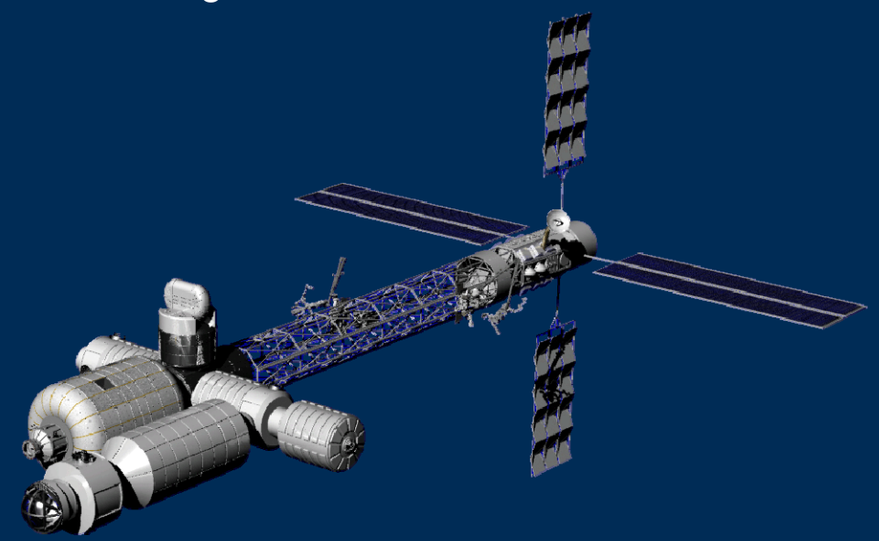

4. Bleed O2 and N2, Stabilize inner temperature

Assembly Process

A: A2R, R: R2, H: Human

H
5. Crew open the Hatch

H
6. Install Target Marker

H
7. Install MT and Scanner

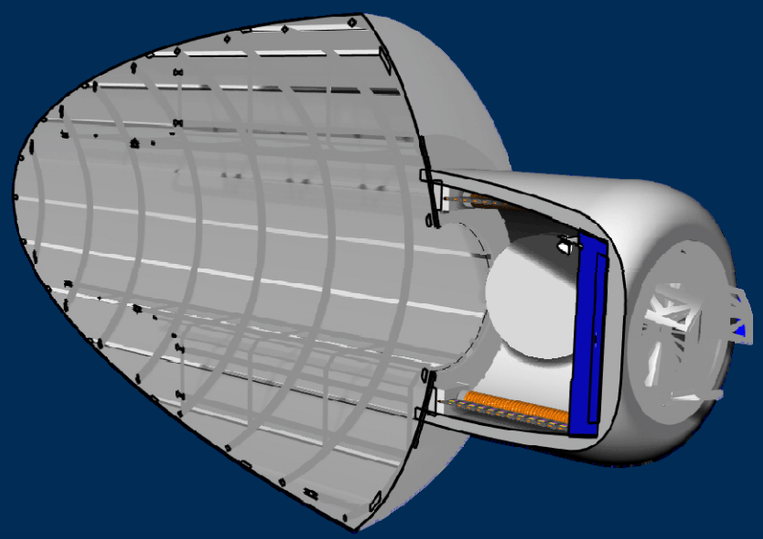

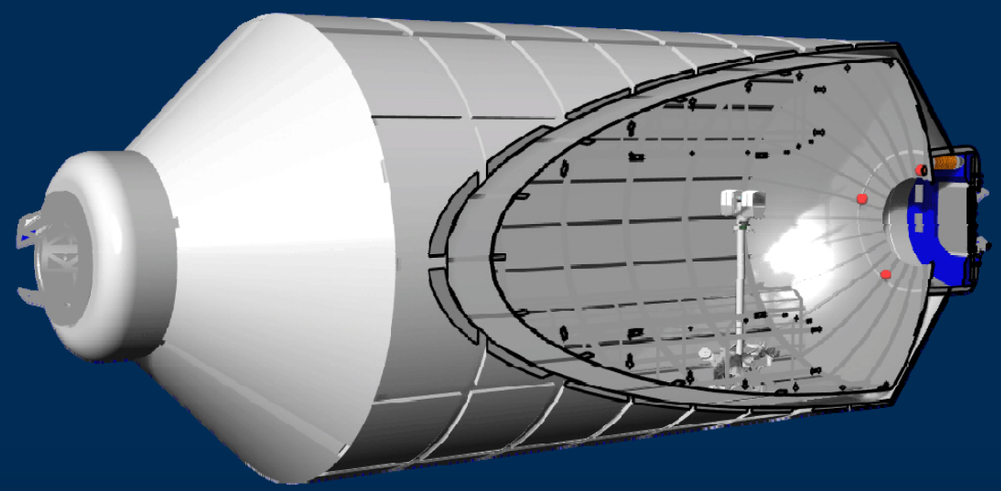

8. Scan Internal Tank

Assembly Process

A: A2R, R: R2, H: Human

H

9. Install A2R

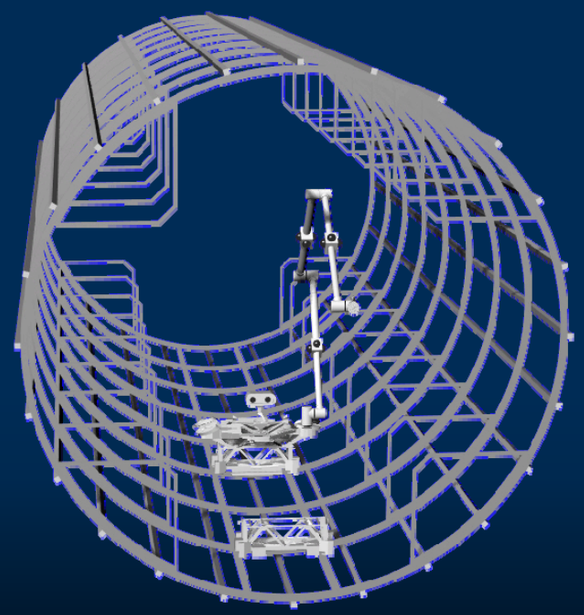

A

10. Attach CFR plate

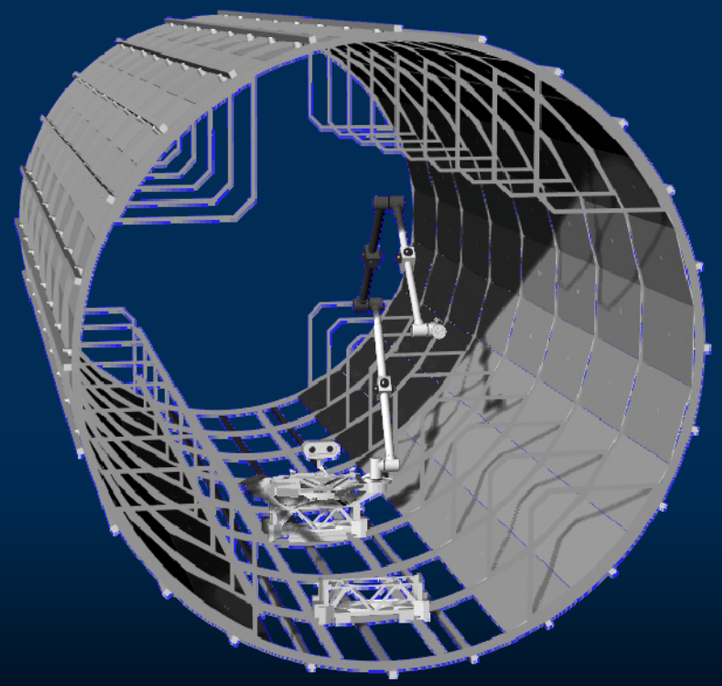

A

11. Attach HMC

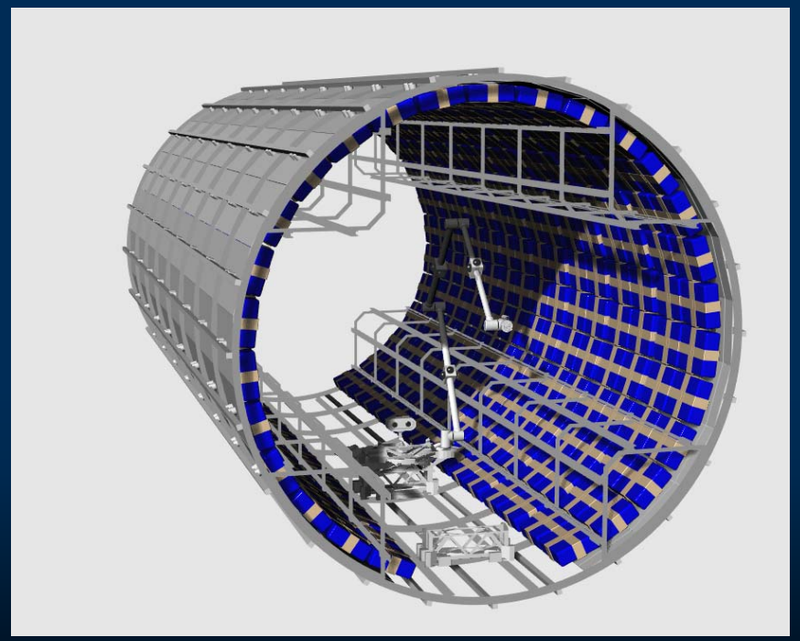

Assembly Process

A: A2R, R: R2, H: Human

R

12. Attach Secondary Structure

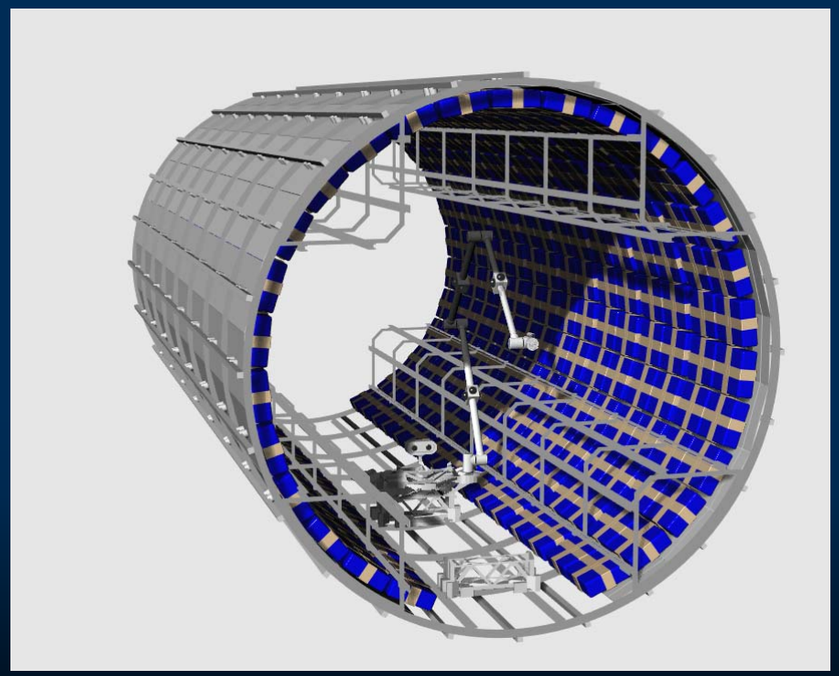

A

13. Attach Manifold

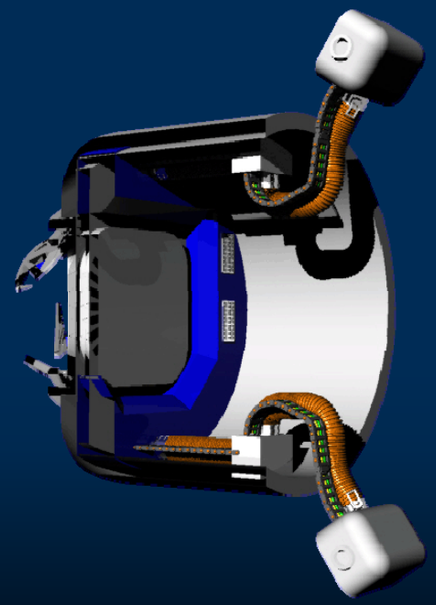

A

14. Install Diffuser &
Return Air Fan Assembly

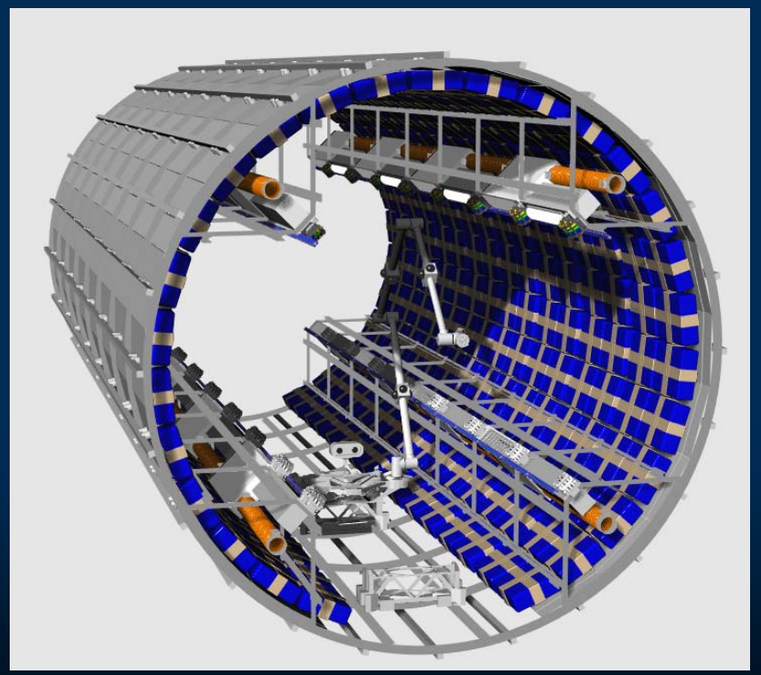

Assembly Process

A: A2R, R: R2, H: Human

R

15. Connect Duct Hose

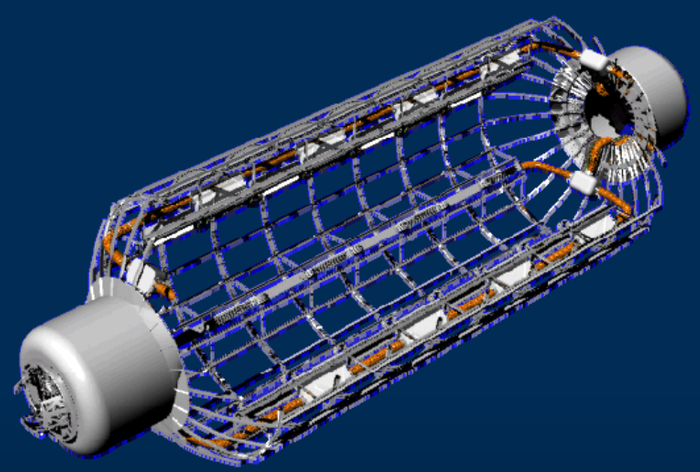

A

16. Install LED and Utility Board

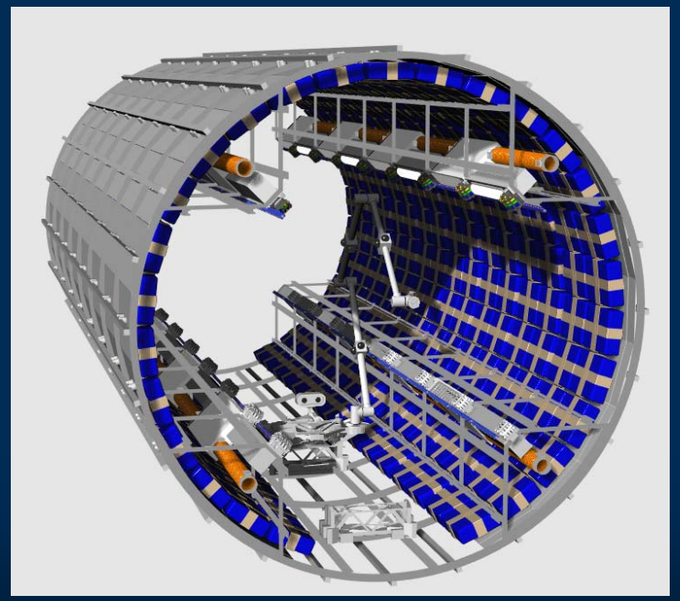

R

17. Cable Connection

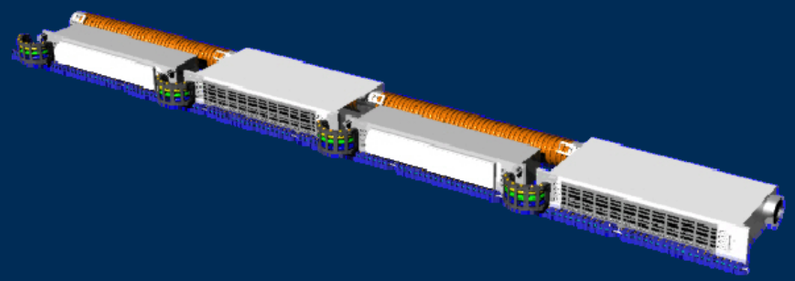

Assembly Process

A: A2R, R: R2, H: Human

A H

18. Kitchen

A

19. Install Projector

A H

20. Install Hydroponics

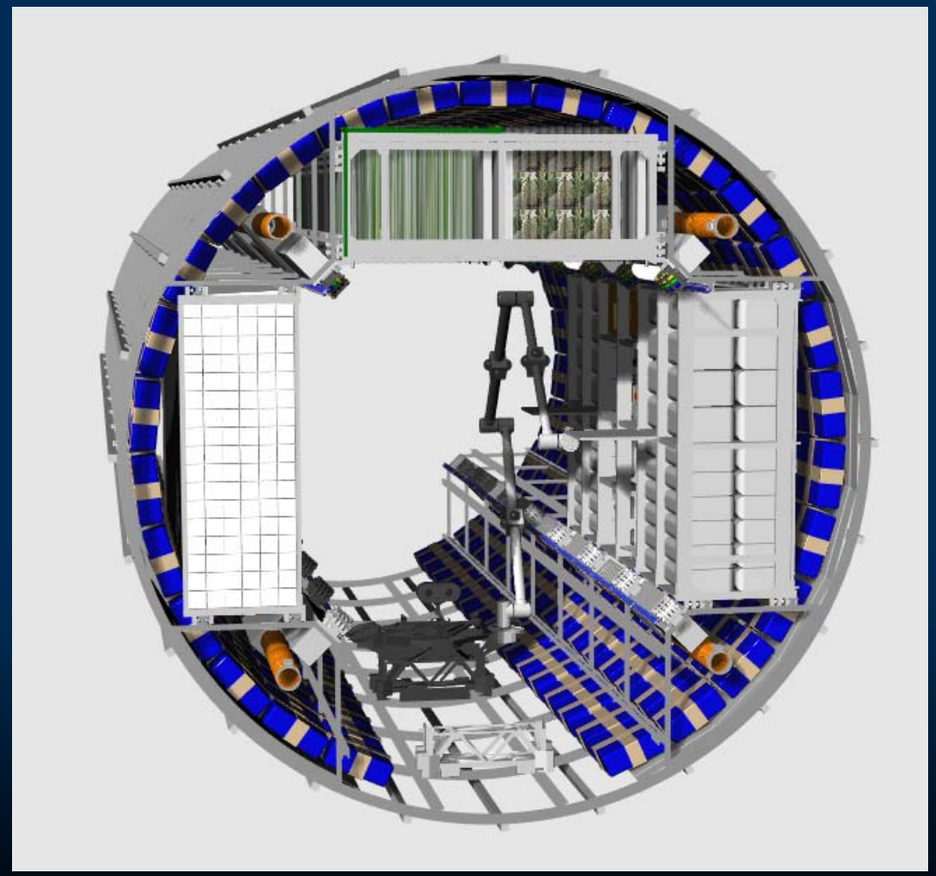

Assembly Process

A: A2R, R: R2, H: Human

A H

21. Install Crew Quarters

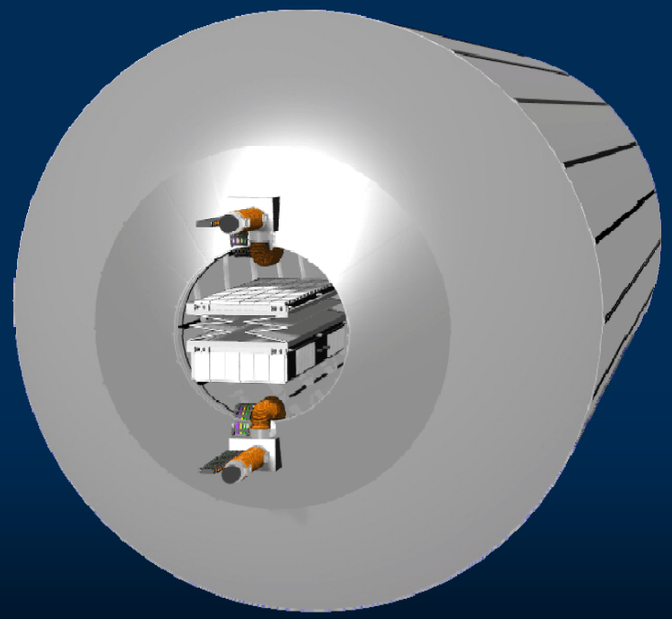

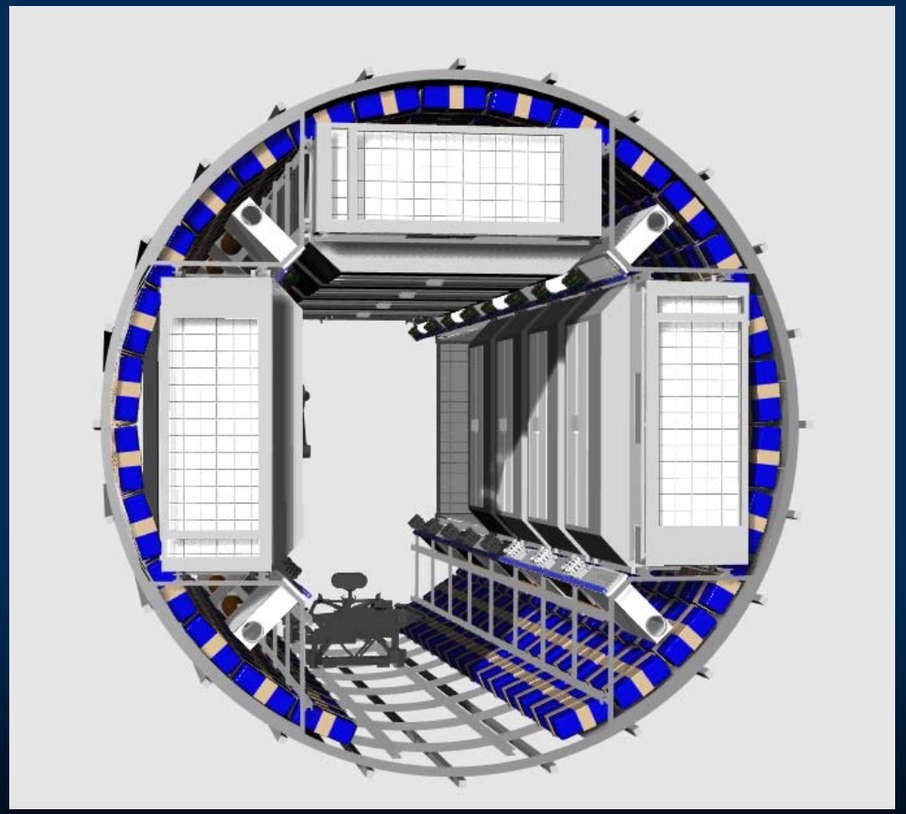

Assembly Process

A: A2R, R: R2, H: Human

A H
22. Remove rail

A
23. Install CFR plate and HMC wall

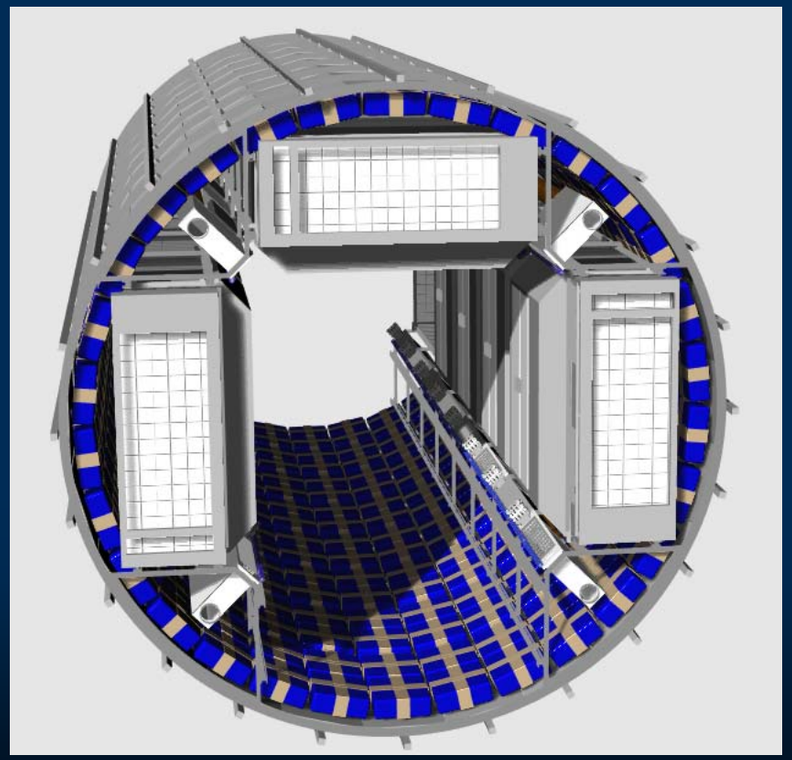

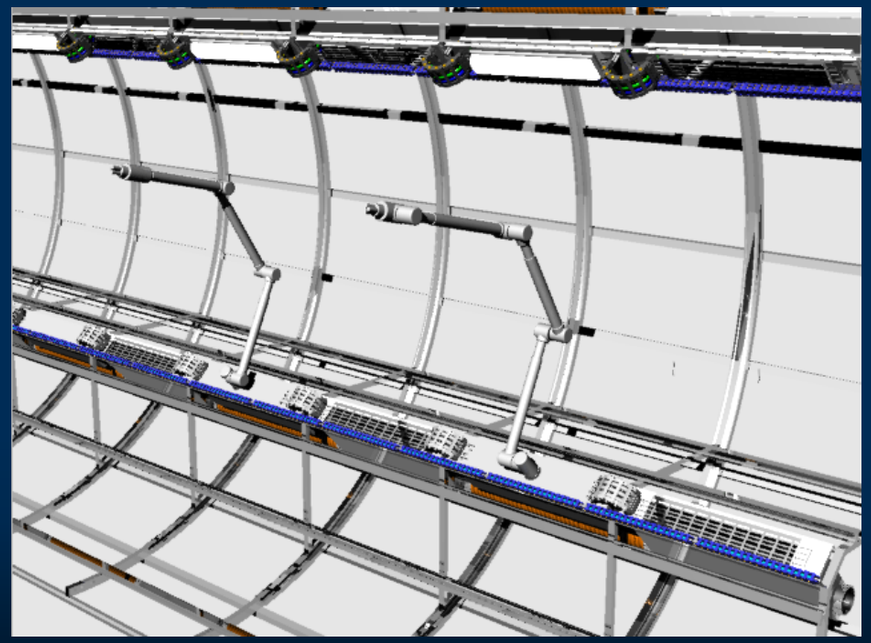

Assembly Process

A: A2R, R: R2, H: Human

A H

24. Install Cargo

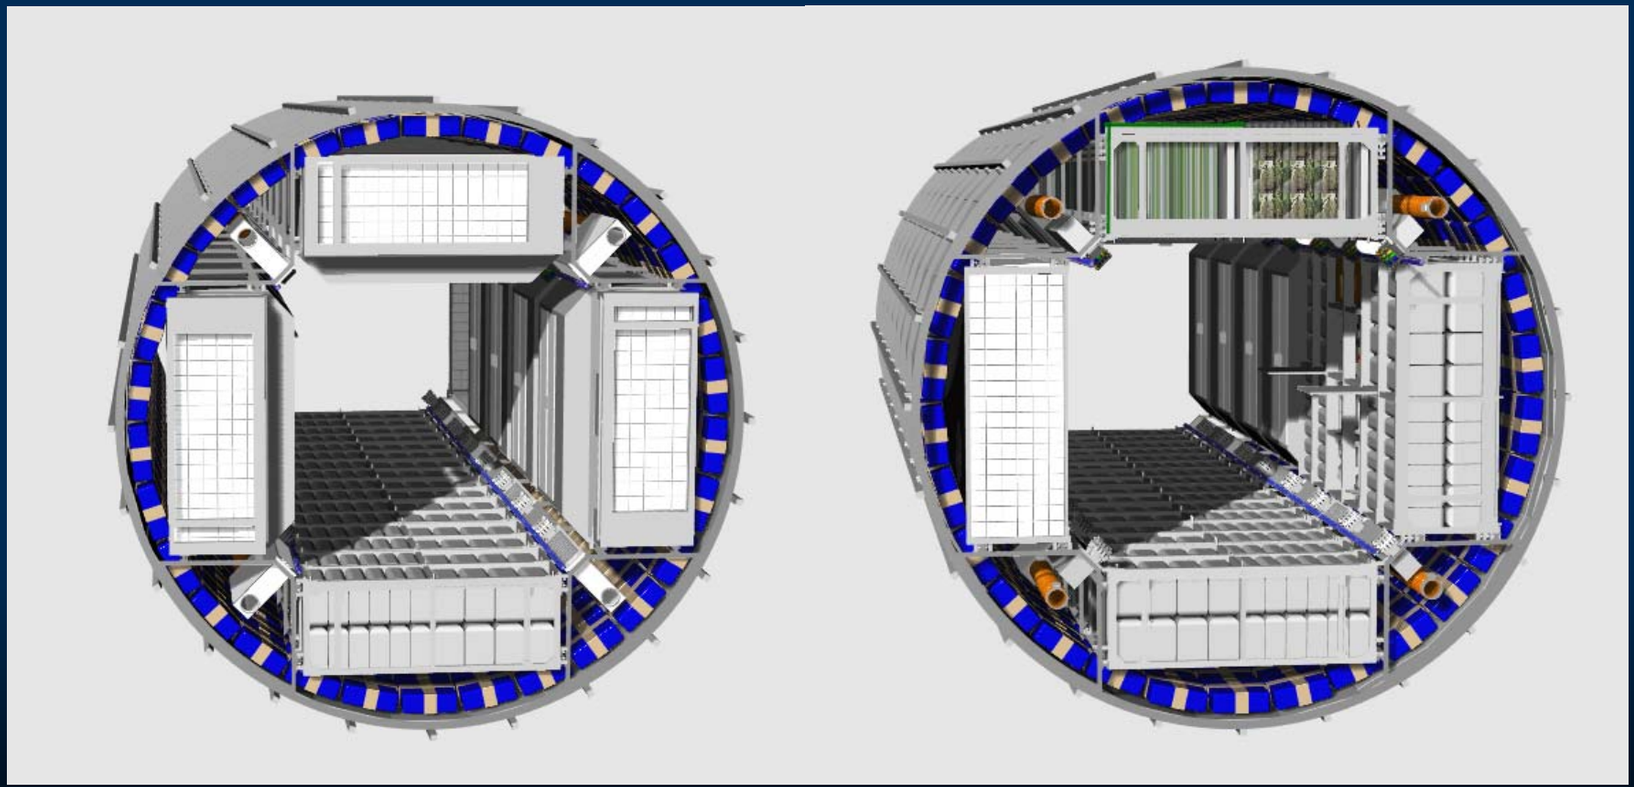

Future Consideration

- How to convert a spent stage rocket into hab.
- Application for lunar base or deep space exploration habitatation

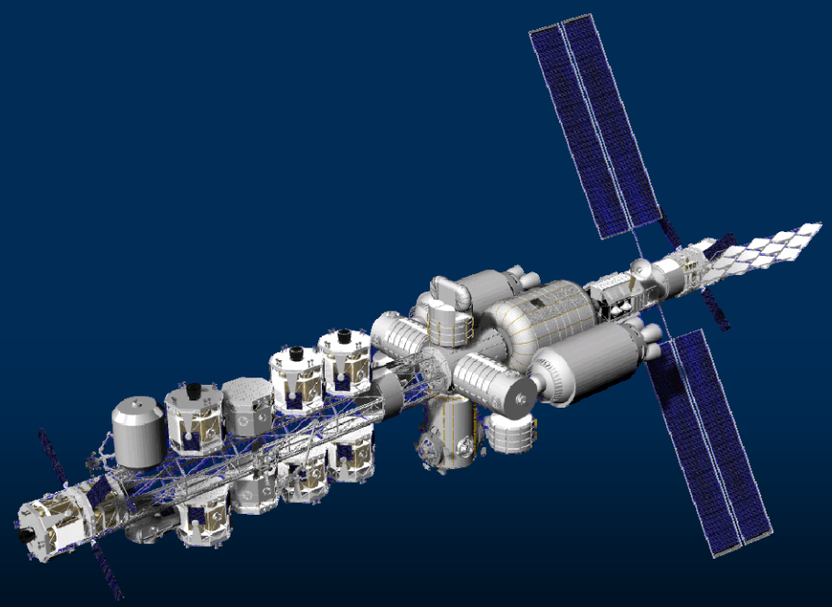

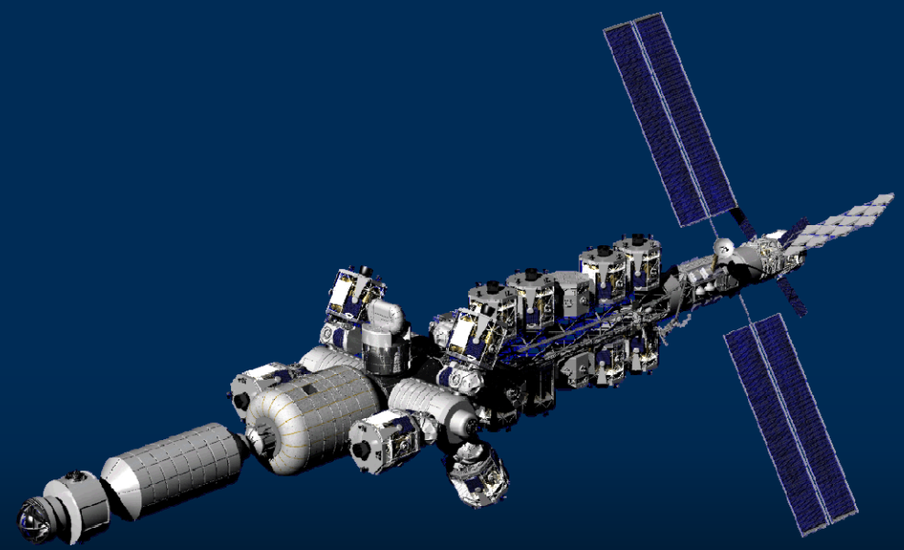

Thank You

Queries?..